


# NHDS SERIES


## 1.6mm Half Pitch Type



DIP SWITCH

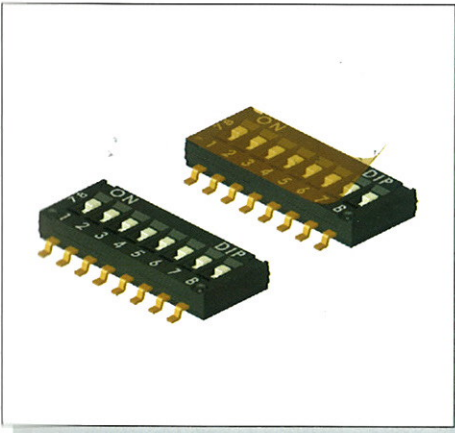

### HOW TO ORDER

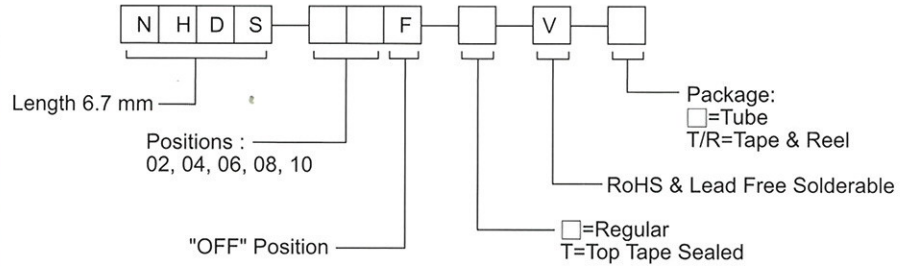

Precaution : For quality assurance, please operate actuators carefully to avoid any damage.

※NHDS Series will be available until Jun. 2008.

### SPECIFICATION

#### MECHANICAL

Mechanical Life: 1000 operations.  
 Operation Force: 500gf  
 Stroke: 0.6mm

#### ENVIRONMENTAL

Operation Temperature Range: -40°C to +85°C.  
 Storage Temperature Range: -40°C to +85°C.




#### ELECTRICAL

Electrical Life: 1000 operation cycles  
 Non-Switching Rating: 100mA, 50VDC.  
 Switching Rating: 25mA, 24VDC.


#### PACKAGE

NHDS-02(-T): 125 pcs/tube  
 NHDS-04(-T): 75 pcs/tube  
 NHDS-06(-T): 54 pcs/tube  
 NHDS-08(-T): 40 pcs/tube  
 NHDS-10(-T): 33 pcs/tube  
 Tape and Reel: NHDS series: 4000 pcs/reel

### NHDS

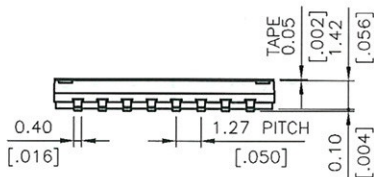

NHDS-10-V	10	13.93[.548]
NHDS-08-V	8	11.39[.448]
NHDS-06-V	6	8.85[.348]
NHDS-04-V	4	6.31[.248]
NHDS-02-V	2	3.77[.148]
PROD. NO.	NO. OF POS.	DIM. A

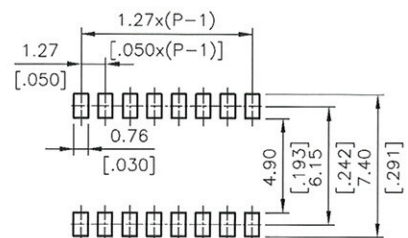

### P.C.B. LAYOUT