


RECOMMENDED MOUNTING:

M4 FASTENER WITH 6.00 IN-LB [7.00 XGF-CM] OF TORQUE MAX.

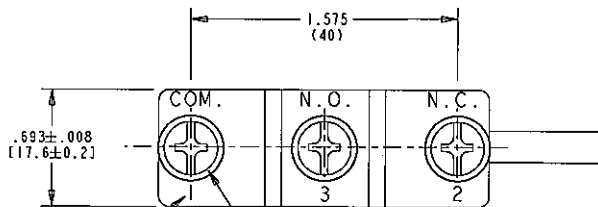

TERMINAL CALL-OUTS MAY ALSO BE LISTED NUMERICALLY

3 - M4 X 4.9 mm
TERMINAL SCREW AND
INTERNAL TOOTHED
LOCK WASHER

CHARACTERISTICS	
ELECTRICAL RATING	15A 250 VAC UL APPROVED 15A 250 VAC VDE APPROVED
TERMINAL	SCREW
OPER. FORCE MAX.	70 GMS
RELEASE FORCE MIN.	14 GMS
PRETRAVEL MAX.	.394 [10 mm]
OVERTRAVEL MIN.	.220 [5.6 mm]
MOVE. DIFF. MAX.	.050 [1.27 mm]
OPERATING POSITION	.716 TO .780 [18.2 TO 19.8 mm]

DWN: J. DOLNIK
 APVD: SB
 DATE: 10-JUN-05

TRIED WHILE PRODUCTION



THE CONFIDENTIAL AND PROPRIETARY
 INFORMATION CONTAINED IN THIS DOCUMENT
 IS OWNED BY CHERRY ELECTRICAL PRODUCTS,
 A DIVISION OF THE CHERRY CORPORATION WHO
 MUST GIVE WRITTEN PERMISSION BEFORE THE
 DOCUMENT OR INFORMATION CAN BE COPIED,
 DISCLOSED OR USED IN ANY WAY.

TOLERANCE UNLESS SPECIFIED

X.XX	X.XXX	ANGLES
± 0.02	± 0.015	± 5.0



11200 86TH AVENUE
 PLEASANT PRAIRIE, WI 53158

SPEC DRAWING

C ITEM NO. GPTCLS01

C	13123	22-Jul-05	JED	SG
REV	FCM	WH	DATE	PREP/APVD

PROJECT 7 131

SCALE: 2:1

SHEET 1 OF 1

ORIGINAL ON FILE