



-AC- S172RAP



172x51mm/Dia.6.8x2inch 238 CFM


Sinwan Plastic Impeller Tubeaxial Fan

Model No	额定电压 VAC	电压范围 VAC	频率 Hz	输入功率 Watt	参考转速 RPM	最大风量 CFM	m3/min	最大风压 Inch/H2O	mm	噪音 db(A)	PQ
S172RAP-11-1**	115	100~120	50/60	26/35	2700/3200	196/238	5.6/6.7	0.58/0.72	14.73/18.29	29.52	2/1
S172RAP-11-2**	115	100~120	50/60	22/20	2400/2300	175/170	5/4.8	0.49/0.47	12.45/11.94	4.42	4/3
S172RAP-11-3**	115	100~120	50/60	18/16	1500/1800	110/130	3.1/3.7	0.35/0.43	8.89/10.92	3.33	6/5
S172RAP-11-1/2** dual speed (-1 High, -2 Medium)	115	100~120	50/60	26/35	2600/3200	190/238	5.4/6.7	0.58/0.72	14.73/18.29	2.952	2/1
				22/20	2400/2350	175/168	5/4.8	0.49/0.47	12.45/11.94	4.41	4/3
S172RAP-22-1**	230	200~240	50/60	26/35	2700/3200	196/238	5.6/6.7	0.58/0.72	14.73/18.29	2.952	2/1
S172RAP-22-2**	230	200~240	50/60	22/20	2400/2300	175/170	5/4.8	0.49/0.47	12.45/11.94	4.42	4/3
S172RAP-22-3**	230	200~240	50/60	18/16	1500/1800	110/130	3.1/3.7	0.35/0.43	8.89/10.92	3.33	6/5
S172RAP-22-1/2** dual speed (-1 High, -2 Medium)	230	200~240	50/60	26/35	2700/3200	196/238	5.6/6.7	0.58/0.72	14.73/18.29	2.952	2/1
				22/20	2400/2350	175/168	5/4.8	0.49/0.47	12.45/11.94	4.42	4/3
S172RAP-11/22-1** dual voltage 115/230	115 230	100~120 200~240	50/60	26/35	2700/3200	196/225	5.6/6.4	0.58/0.71	14.73/18.03	3.52	2/1


- ** = "WB" for wire lead type Ball bearing, or "TB" for terminal type Ball bearing
- 100, 200, 240V 或特殊电压 12, 24, 28, 38, 42, 48, 380, 440, 480V... 50/60Hz, 任何电压都可订做。
- 双速 高/中 1速/2速, 中/低 2速/3速 可依需求制造。
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +-10%

Motor	
马达类别:	Capacitor induction, inner rotor, 1-phase
马达防护:	Impedance protected
IP 防护:	-
Mechanical	
外框:	Aluminum die cast, black(S172RAP)
叶轮:	5 blades, glass fiber reinforced plastic, rated UL94V-0
轴承:	Two ball bearings
旋转方向:	CW seen on rotor
接头:	Wire leads, terminal flat pin
重量:	1150 g (2.53 Lbs)
Electrical	
绝缘强度:	Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz
绝缘电阻:	Over 100 MΩ at DC 500V
讯号输出:	Optional:alarm R/D, tachometer F/G
Environment	
使用温度:	Ambient non-condensing -20~+70C
保存温度:	-40C~+100C (at 65%RH)
平均预期寿命:	L10 100K hours at 35C, 50K hours at 60C

► Performance P-Q Curves

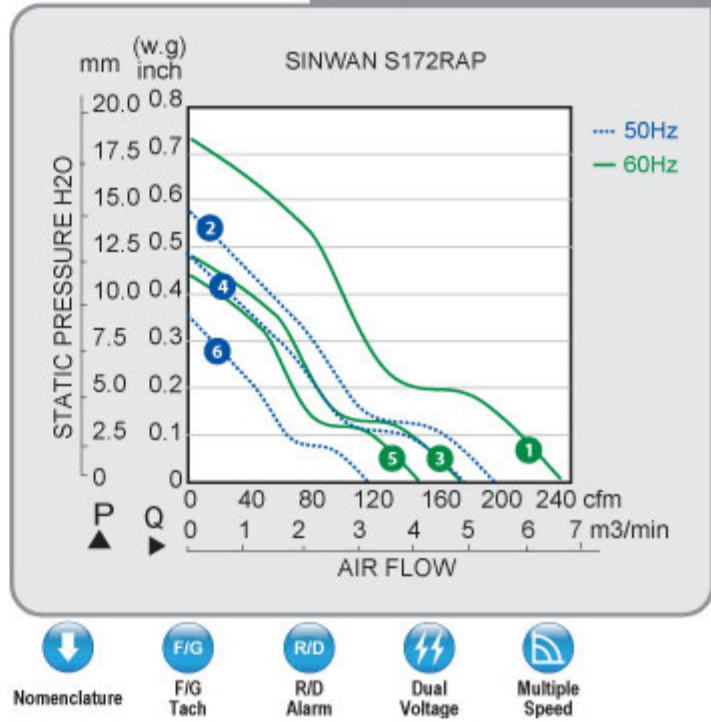

► Outline Dimensions

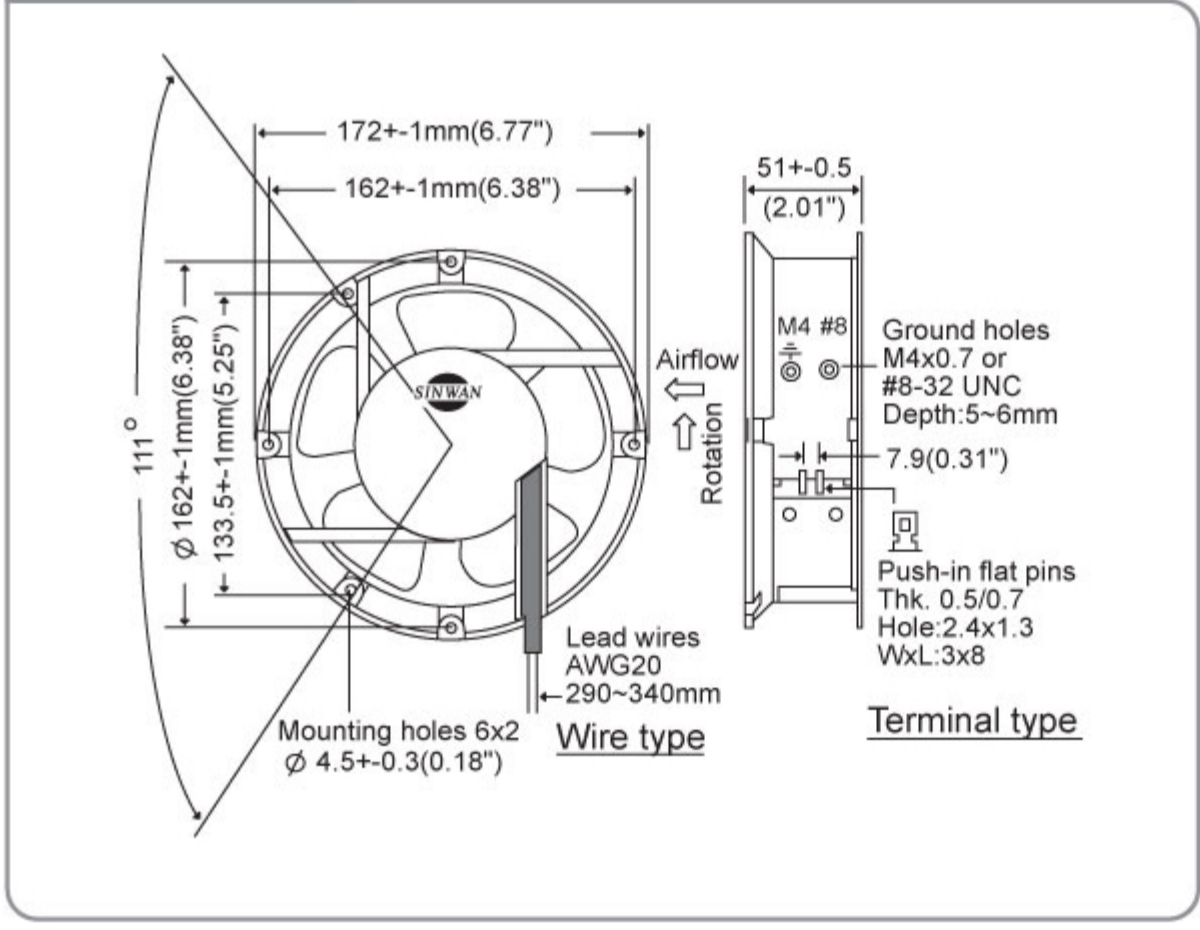

- 相關產品
- Metal Fan Guard
G172-10H, G172-10HA
 - Plastic Fan Guard
G172P
 - Plastic Fan Filter
GRM172-30, GRM172-45
 - Metal Fan Screen
MF172S-30N
-