



-AC- PFA19RAN




Dia.190x67mm/7.5x2.64inch Max. 380CFM

Sinwan AC Centrifugal Fan, Motorized Impeller, Backward curved blades

Model No	额定电压 VAC	电压范围 VAC	频率 Hz	输入功率 Watt	参考转速 RPM	最大风量 CFM	最大风压 m3/min	最大风压 Inch/H2O	最大风压 mm	噪音 db(A)	PQ				
PFA19RAN11-1**	115	100~120	50/60	60/80	2600/2800	335/360	9.5/10.2	1.71/1.33	43.43/33.78	61/62	2/1				
PFA19RAN11-2**	115	100~120	50/60	55/65	2300/2250	300/294	8.5/8.3	0.86/0.81	21.84/20.57	53/52	4/3				
PFA19RAN11-3**	115	100~120	50/60	20/30	1600/1650	221/222	6.3/6.3	0.43/0.45	10.92/11.43	46/47	6/5				
PFA19RAN11-4**	115	100~120	50/60	18/25	1200/1100	158/153	4.5/4.3	0.41/0.38	10.41/9.65	38/37	8/7				
PFA19RAN11-1/2** dual speed	115	100~120	50/60	-1 60/80 -2 55/65	2600/2300	2800/2250	340/300	380/294	9.6/8.5	10.5/8.6	1.33/0.81	26.67/21.84	33.7861/20.5753	62/52	2/1 4/3
PFA19RAN11-3/4** dual speed	115	100~120	50/60	-1 20/30 -2 18/25	1650/1200	1700/1100	221/158	223/153	6.3/4.5	6.3/4.3	0.45/0.38	10.92/10.41	11.4346/9.65	47/38	6/5 8/7
PFA19RAN22-1**	230	200~240	50/60	60/80	2600/2800	335/360	9.5/10.2	1.71/1.33	43.43/33.78	61/62	2/1				
PFA19RAN22-2**	230	200~240	50/60	55/65	2300/2250	300/294	8.5/8.3	0.86/0.81	21.84/20.57	53/52	4/3				
PFA19RAN22-3**	230	200~240	50/60	20/30	1650/1700	223/226	6.3/6.4	0.43/0.45	10.92/11.43	46/47	6/5				
PFA19RAN22-4**	230	200~240	50/60	18/25	1200/1100	158/153	4.5/4.3	0.41/0.38	10.41/9.65	38/37	8/7				
PFA19RAN22-1/2** dual speed	230	200~240	50/60	-1 60/80 -2 55/65	2600/2300	2800/2250	335/300	360/294	9.5/8.5	10.5/8.6	1.33/0.81	43.43/21.84	33.7861/20.5753	62/52	2/1 4/3
PFA19RAN22-3/4** dual speed	230	200~240	50/60	-3 20/30 -4 18/25	1650/1200	1700/1100	221/158	223/153	6.3/4.5	6.3/4.3	0.45/0.38	10.92/10.41	11.4346/9.65	47/38	6/5 8/7
PFA19RAN11/22-1** dual voltage	115/ 230	100~120 200~240	50/60	60/80	2600/2800	335/360	9.5/10.2	1.71/1.33	43.43/33.78	61/62	2/1				
PFA19RAN44-1**	380/ 440	300~480	50/60	60/80	2600/2800	335/360	9.5/10.2	1.71/1.33	43.43/33.78	61/62	2/1				
PFA19RAN44-1/2** dual speed	380/ 440	300~480	50/60	60/80 55/65	2600/2300	2800/2250	335/300	360/294	9.5/8.5	10.5/8.6	1.33/0.81	43.43/21.84	33.7861/20.57	62/52	2/1 4/3


- ** = "WB" for wire leads type, Ball bearing, or "TB" for terminal block connecting type, Ball bearing
- 100, 200, 240V 或特殊电压 12, 24, 28, 38, 42, 48, 380, 440, 480V... 50/60Hz, 任何电压都可订做。
- 双速 高/中 1速/2速, 中/低 2速/3速 可依需求制造。
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +/-10%

Motor	
马达类别:	Outer rotor, capacitor induction
马达防护:	Thermal protector, auto cutoff & reset
IP 防护:	56, 55 or 44 optional
Mechanical	
外框:	Aluminum die cast, natural treatment
叶轮:	Impeller & flange glassfiber reinforced PA66
轴承:	Maintenance-free 2 ball bearings
旋转方向:	CW seen on rotor
接头:	Wire leads or, terminals block on request
重量:	1210 g (2.7 pounds)
Electronical	
绝缘强度:	Over 1 min. at 1,500 VAC, 0.5mA, 50/60Hz
绝缘电阻:	Over 100M Ohm at DC 500V
讯号输出:	Alarm R/D, Tacho F/G on request
Environment	
使用温度:	-20C~+75C
保存温度:	-35 ~ +100C
平均预期寿命:	90K hours at 35C, 35K hours at 65C L10

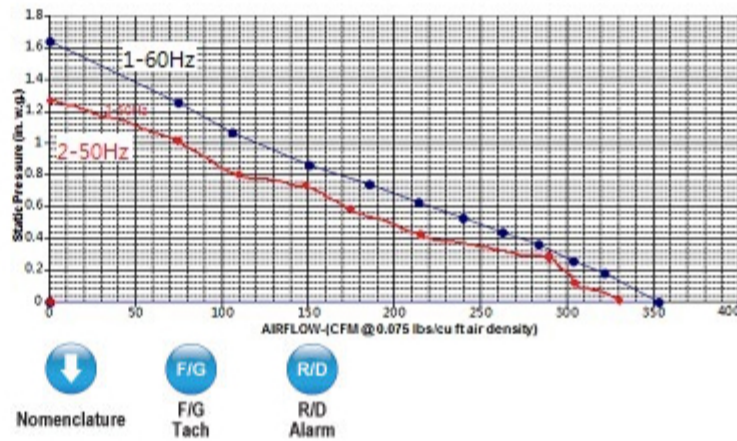

Outline Dimensions

Sinwan AC Centrifugal Fan PFA19R

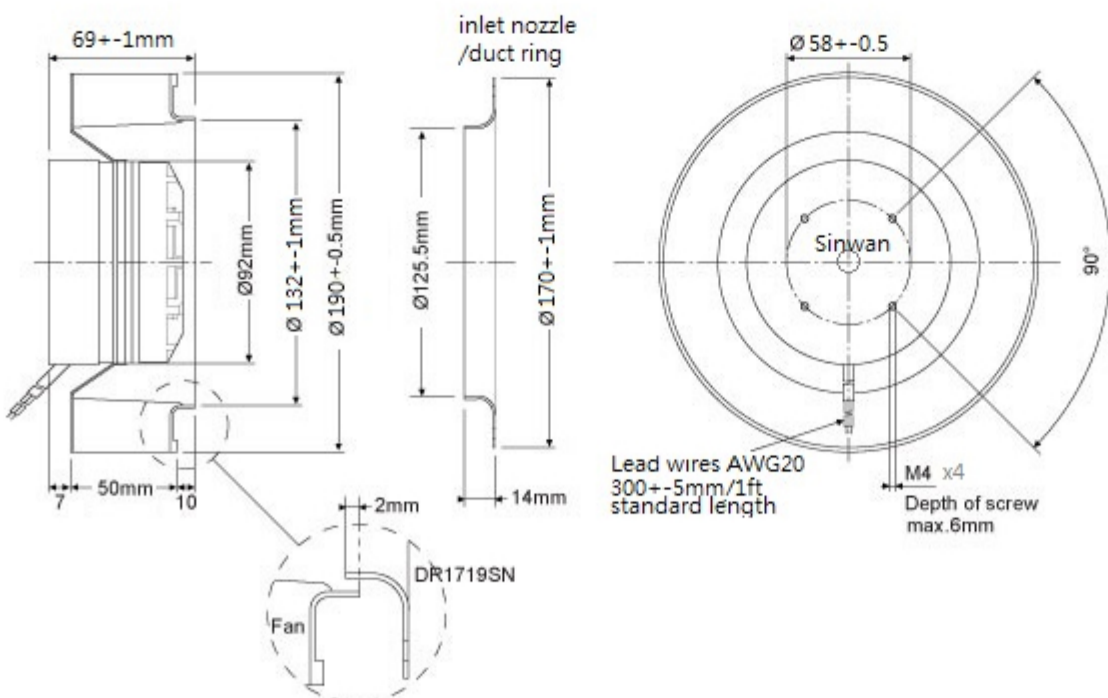

相關產品



Inlet nozzle/Duct ring
DR1719SN

