

Φ40xL.290x361x60mm 80~40 CFM, AC Crossflow fan

	额定电压	电压范围	频率	输入功率	参考转速	最大风量		最大风压		噪音	PQ
Model No	VAC	VAC	Hz	Watt	RPM	CFM	m3/min	Inch/H2O	mm	db(A)	
MCA429SP11-1** (****#)	115	100~120	50/60	21/20	2600/2500	80/76	2.3/2.2	0.12/0.1	3.05/2.54	38	
MCA429SP11-2** (****#)	115	100~120	50/60	18/16	2100/2000	65/60	1.8/1.7	0.1/0.09	2.54/2.29	30	
MCA429SP11-3** (****#)	115	100~120	50/60	14/12	1500/1400	45/43	1.3/1.2	0.06/0.05	1.52/1.27	23	
MCA429SP22-1** (****#)	230	200~240	50/60	21/20	2600/2500	80/76	2.3/2.2	0.12/0.1	3.05/2.54	38	
MCA429SP22-2** (****#)	230	200~240	50/60	18/16	2100/2000	65/60	1.8/1.7	0.1/0.09	2.54/2.29	30	
MCA429SP22-3** (****#)	230	200~240	50/60	14/12	1500/1400	45/43	1.3/1.2	0.06/0.05	1.52/1.27	23	
MCA429SP11/22-1** (****#)	115 230	100~120 200~240	50/60	21/20	2600/2500	80/76	2.3/2.2	0.12/0.1	3.05/2.54	38	

** = "WB" for wire lead type Ball bearing, or "TB" for terminal block type Ball bearing

(****#) = (RENON),(LESGN),(RESG F/G), ...

1st* = R, L, C - Motor position

2nd* = E, V, Q, H - Air outlet direction

3rd* = S, N - Shield Guard for motor

4th* = G, O - Grill Guard for Impeller

= R/D, F/G, S/C, P/W, S/V, N - Motor Function, N = none, normal motor

Please click Nomenclature to have full & clear model No.

• 100, 200, 240V 或特殊电压 12, 24, 28, 38, 42, 48, 380, 440, 480V... 50/60Hz, 任何电压都可订做。

• 双速 高/中 1速/2速, 中/低 2速/3速 可依需求制造。

• 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +-10%

Motor

马达类别: Shaded pole, inner rotor, 2 pole, single phase, Sinwan Motor MIA109AN

马达防护: Impedance protected

IP 防护:

Mechanical

外框: Steel alloy sheet housing & frame, coating black or galvanized

叶轮: Aluminum alloy fan blades

轴承: Permanently lubricated ball bearings for motor and bracket

旋转方向: CW motor at right (R), CCW at left (L), seen from air outlet

接头: Wire leads or terminal block connecting for choice

重量: -

Electrical

绝缘强度: Over 1 min. at 1,500VAC, 0.5mA, 50/60Hz

绝缘电阻: Over 100 MΩ at DC 500V

讯号输出: Optional:R/D alarm output, tachometer output

Environment

使用温度: Acceptable -25°C~+65°C

保存温度: -30°C~+90°C (65%RH)


平均预期寿命: 40K hrs at 45°C, 25K hrs at 65°C

▶ Performance P-Q Curves



- Nomenclature
- F/G Tach
- R/D Alarm
- Dual Voltage
- Multiple Speed

▶ Outline Dimensions

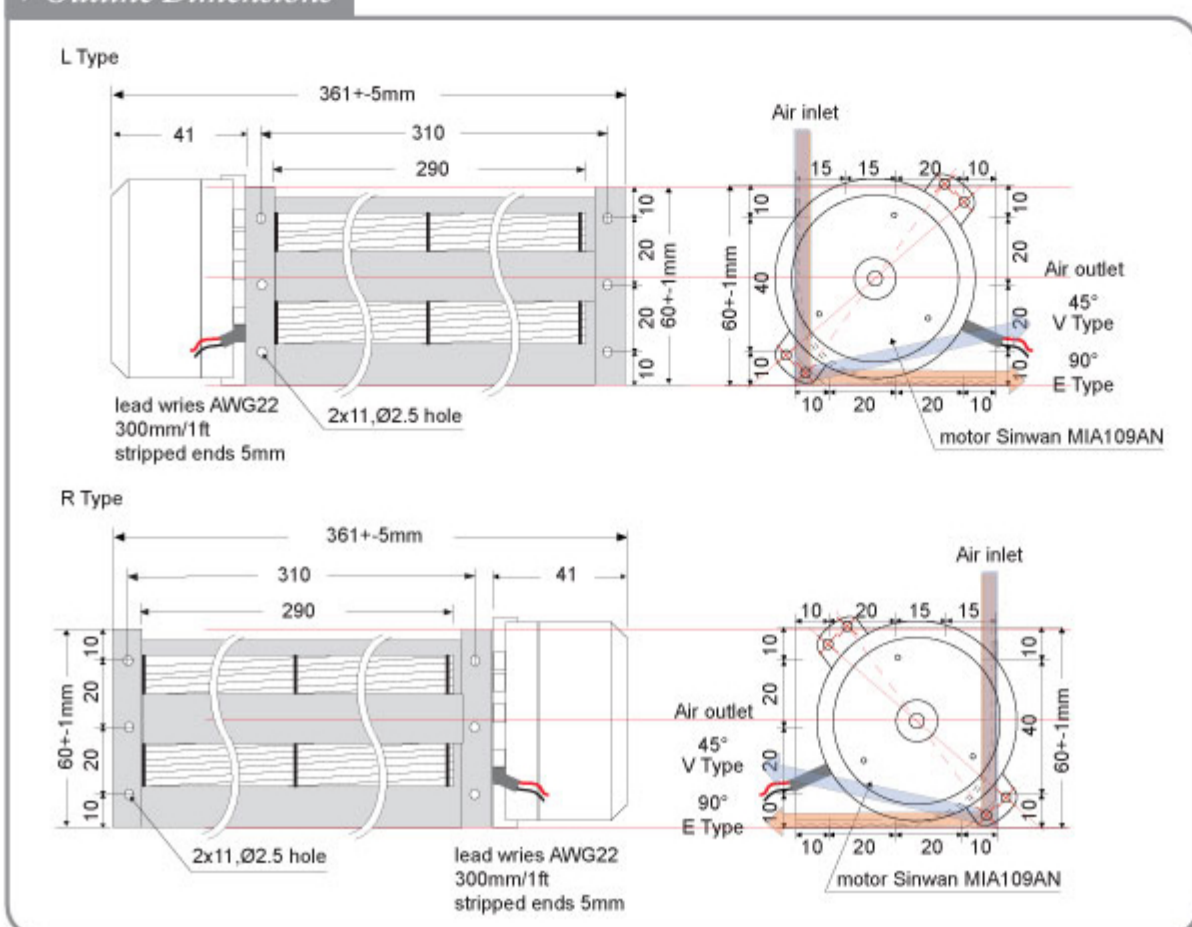

相關產品



Motor
Sinwan Motor MIA109AN

