



Φ40xL.150x220x60mm 55~35cfm, DC Crossflow fan

Model No	额定电压 VDC	电压范围 VDC	输入功率 Watt	额定电流 Amp	参考转速 RPM	最大风量 CFM	最大风压 m3/min	Inch/H2O mm	噪音 db(A)	PQ Curves
----------	-------------	-------------	--------------	-------------	-------------	-------------	----------------	-------------	-------------	--------------

- ** = "WB" for wire lead type Ball bearing, or "TB" for terminal block type Ball bearing
- (****#) = (RENON),(LESGN),(RESG F/G),
- 1st* = R, L, C - Motor position
- 2nd* = E, V, Q, H - Air outlet direction
- 3rd* = S, N - Shield Guard for motor
- 4th* = G, O - Grill Guard for Impeller
- # = R/D, F/G, S/C, P/W, S/V, N - Motor Function, N = none, normal motor
- Please click Nomenclature to have full & clear model No.
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知. 资料公差 +/-10%


Motor	
马达类别:	Sinwan Brushless DC Motor MED127AN
马达防护:	Electronically protected, polarity & locked rotor protection
IP 防护:	IP ratings on request
Mechanical	
外框:	Steel plate housing and frame black coating
叶轮:	Aluminum alloy fan blades with natural treatment cosmetics
轴承:	3 high precision permanently lubricated ball bearings
旋转方向:	Motor at right side (R type), left (L type) for choice, viewed from air outlet
接头:	Wire leads, or terminal block connecting for choice
重量:	510g
Electrical	
绝缘强度:	Over 1 min. 500vac,max. leakage 500 micro Amp
转速控制:	S/C-NTC thermal controlled, PWM-0~100% speed control for choice
讯号输出:	Tacho F/G, motor cutoff alarm R/D
Environment	
使用温度:	Acceptable -20°C~+65°C
保存温度:	-30°C~+85°C (65%RH)
平均预期寿命:	40K hours at 45°C, 20K hours at 65°C

▶ Performance P-Q Curves



- ↓ Nomenclature
- R/D R/D Alarm
- F/G F/G Tach
- S/C S/C Function

▶ Outline Dimensions

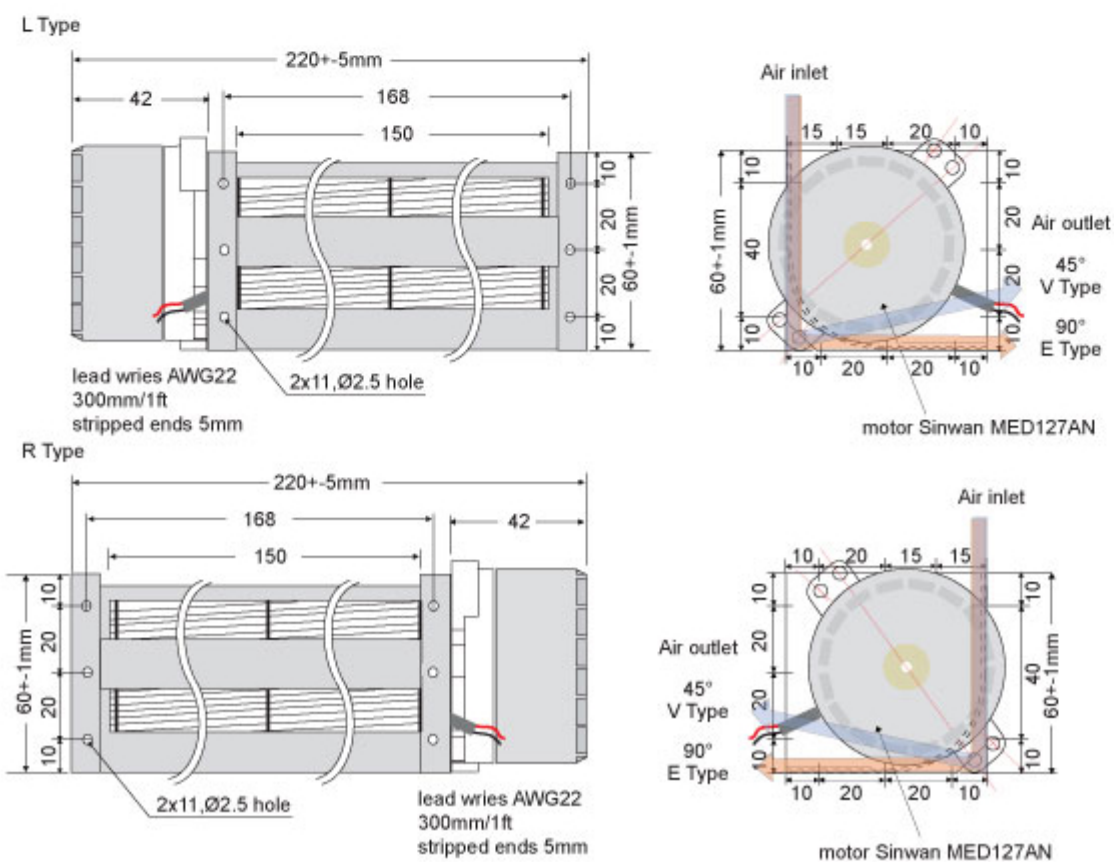

相關產品



Motor
Sinwan Motor MED127AN

