



Dia.175x67mm/6.9x2.6inch 395CFM

Motorized Impeller, Backward curved blades

Model No	额定电压 VDC	电压范围 VDC	输入功率 Watt	额定电流 Amp	参考转速 RPM	最大风量 CFM	最大风压 m3/min	最大风压 Inch/H2O mm	噪音 db(A)	PQ Curves
PFD17RAN-12SH**	12	8~14	64.8	5.4	3500	395	11.2	1.4 35.56	69	1
PFD17RAN-12HH**	12	8~14	50.4	4.2	3000	338	9.6	1.08 27.43	64	2
PFD17RAN-24SH**	24	15~27.6	63.6	2.65	3500	395	11.2	1.4 35.56	69	1
PFD17RAN-24HH**	24	15~27.6	50.4	2.1	3000	338	9.6	1.08 27.43	64	2
PFD17RAN-48SH**	48	22~53	62.4	1.3	3500	395	11.2	1.4 35.56	69	1
PFD17RAN-48HH**	48	22~54	52.8	1.1	3000	338	9.6	1.08 27.43	64	2

- ** = "WB" for wire leads type, Ball bearing, or "TB" for terminal block connecting type, Ball bearing
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +/-10%

Motor

马达类别: Brushless DC motor, Sinwan MED178AN
 马达防护: Electronically protected
 IP 防护: -

Mechanical

外框: Aluminum die casting motor frame, galvanized SEEC steel plate impeller frange
 叶轮: 9 blades, glass-fiber reinforced PA66 impeller
 轴承: Maintenance-free two ball bearings
 旋转方向: CW seen on rotor
 接头: Wire leads or terminal block connecting for choice
 重量: 1,650g


Electronical

绝缘强度: 500VAC/min. Max. leakage 500mA
 转速控制: S/C-ntc, PWM, 0~10V S/V
 讯号输出: R/D alarm, F/G tachometer

Environment


使用温度: -20~+65C(non-condensing)
 保存温度: -40~+90C
 平均预期寿命: L10 formula 90K hours at 35C, 30K hours at 65C

Performance P-Q Curves

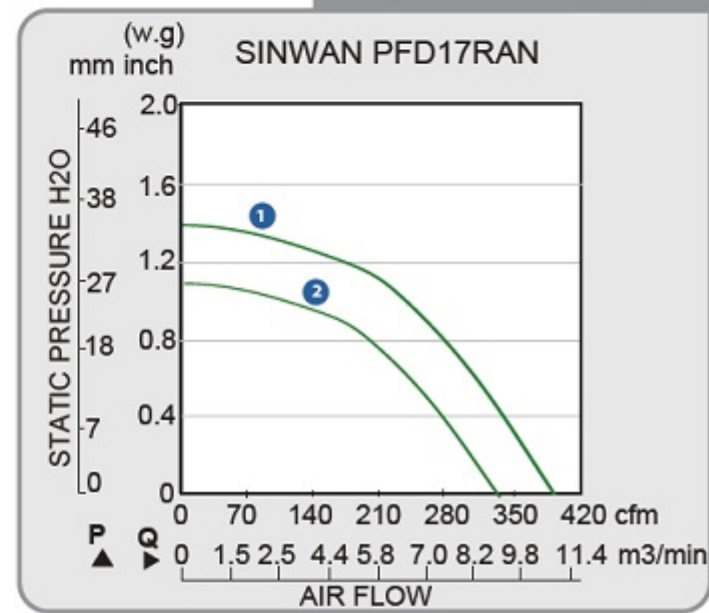

- Nomenclature
- R/D Alarm
- F/G Tach
- S/C Function
- PWM Function

Outline Dimensions

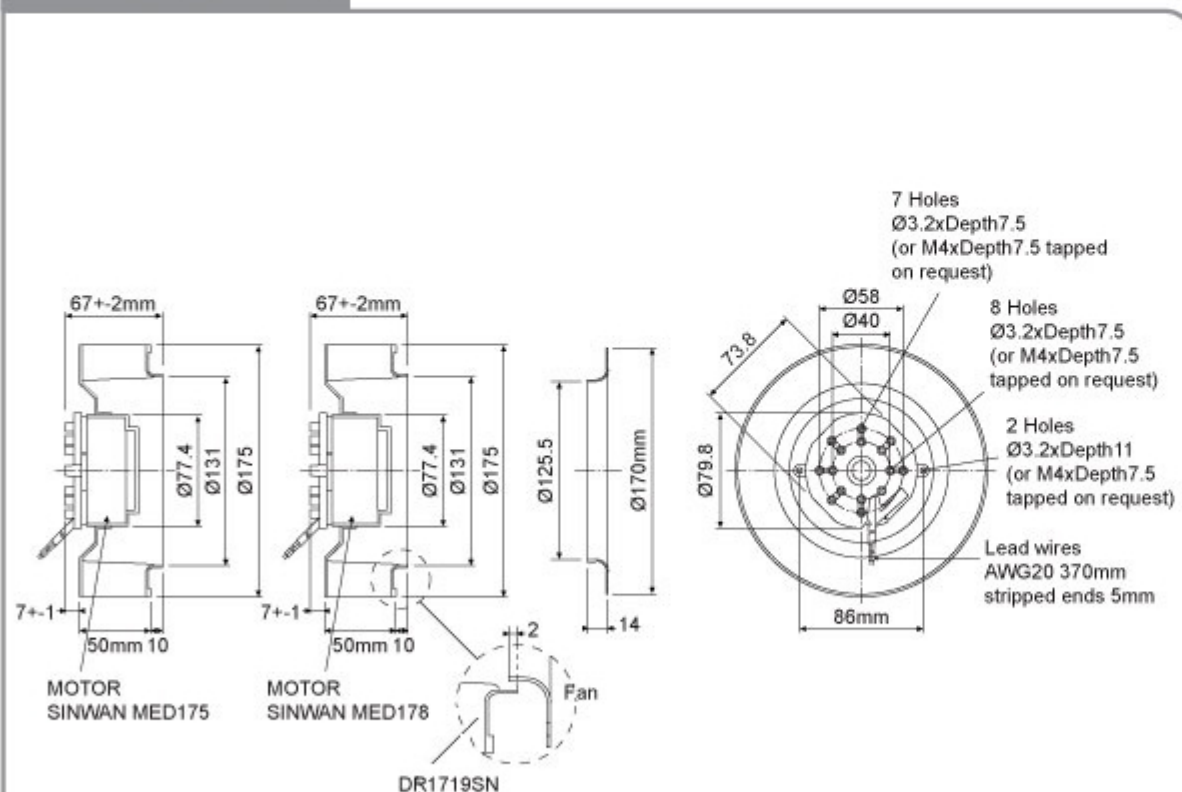

相關產品



Inlet nozzle/Duct ring
DR1719SN