



.EC. SE1225PT (MS)



# 120x120x25mm / 4.7x1inch

## 80 CFM

Sinwan EC Motor

Model No	额定电压 VAC	电压范围 VAC	输入功率 Watt	额定电流 Amp	参考转速 RPM	最大风量 CFM	最大风压 m3/min	最大风压 Inch/H2O mm	噪音 db(A)	PQ Curves
SE1225PT-11-1**	110	80~135	4.0	-	3000	80	2.3	0.26 6.6	40	H
SE1225PT-22-1**	220	180~265	4.0	-	3000	80	2.3	0.26 6.6	40	H
SE1225PT-FR-1**	110/220	80~265	4.0	-	3000	80	2.3	0.26 6.6	40	H

- \*\* = "WB" for wire lead type Ball bearing, or "TB" for terminal type Ball bearing
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +/-10%

### Motor

马达类别: AC-DC Energy Saving EC Motor

马达防护: Electronically protected

IP 防护: Ratings on request

### Mechanical

外框: PBT UL 94-V0

叶轮: 7 blades, Thermoplastic PBT UL94V-0

轴承: Two ball bearings

旋转方向: CCW seen on rotor

接头: Wire lead or terminal flat pin connecting

重量: 175g

### Electrical

绝缘强度: 1500VAC/min

转速控制: Optional:PWM, S/C NTC thermister on request

讯号输出: Optional:R/D alarm output, tachometer output


### Environment

使用温度: -10~+70C

保存温度: -40C~+80C


平均预期寿命: L10 50K hours at 40C

### Performance P-Q Curves

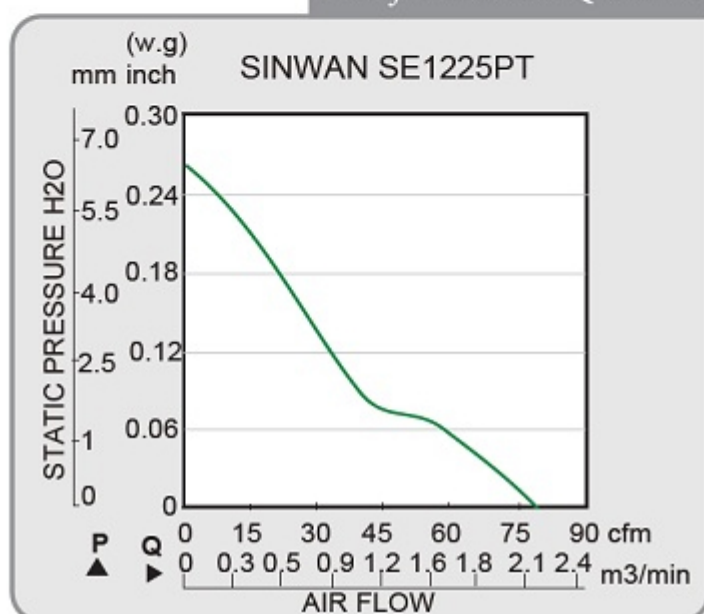

- Nomenclature
- R/D Alarm
- F/G Tach
- S/C Function
- PWM Function

### Outline Dimensions

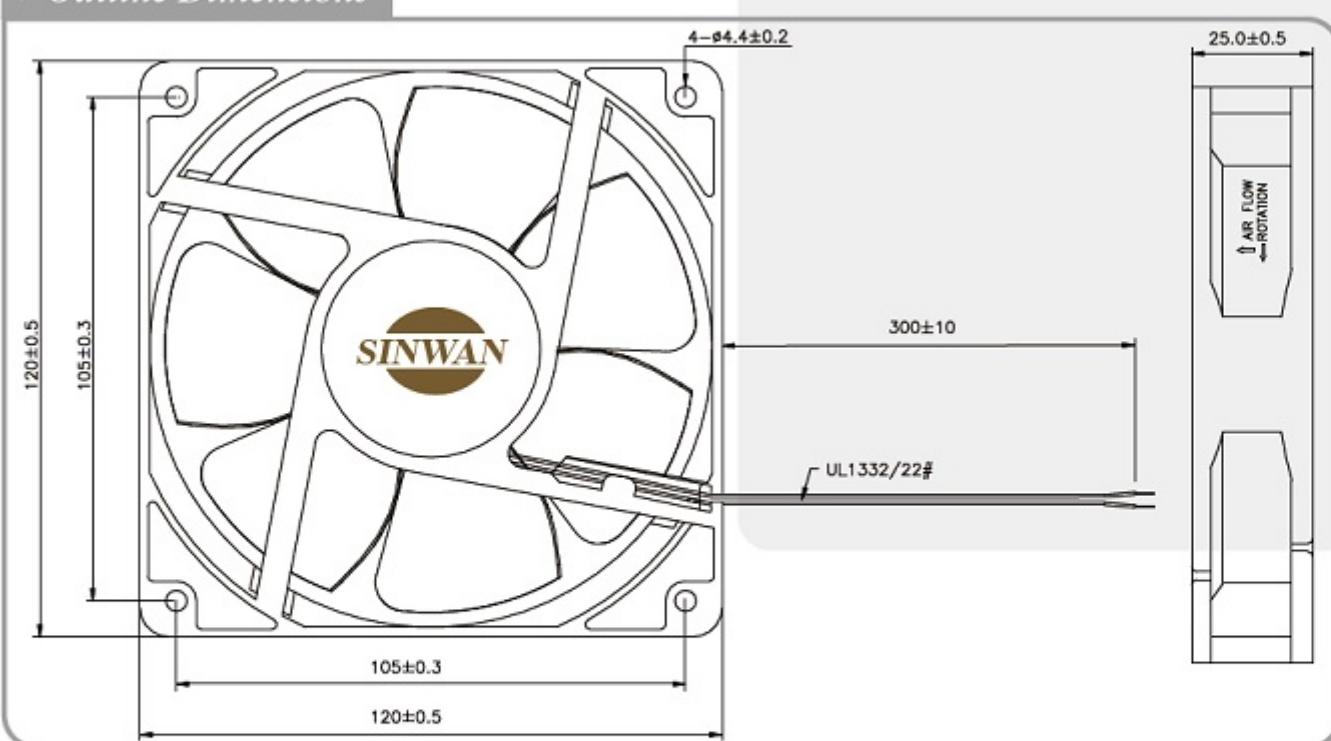

### 相關產品



Metal Fan Guard  
G109-15A, G109-15B, G109-17



Plastic Fan Guard  
G119P2, G119P4, G120P, G120P2, G120P25F, G120P4



Plastic Fan Filter  
GRM120-30, GRM120-45



Metal Fan Screen  
MF120S-30N



RoHS Pending