



.EC. SE1238PT (MS)



120x120x38mm / 4.7x1.5inch

133 CFM


Sinwan EC Motor

	额定电压	电压范围	输入功率	额定电流	参考转速	最大风量	最大风压	噪音	PQ Curves
Model No	VAC	VAC	Watt	Amp	RPM	CFM	m3/min	Inch/H2O mm	db(A)
SE1238PT-FR-1**	110/220	85~256	6.5	-	3000	133.8	3.8	0.42 10.67	47 H

- ** = "WB" for wire lead type Ball bearing, or "TB" for terminal type Ball bearing
- 信湾保留修改资料与改良电子&机械设计的权利, 无须告知. 资料公差 +-10%


Motor	
马达类别:	AC-DC Energy Saving EC Motor
马达防护:	Electronically protected
IP 防护:	IP55,56 optional request
Mechanical	
外框:	PBT UL 94-V0
叶轮:	7 blades, Thermoplastic PBT UL94V-0
轴承:	Two ball bearings
旋转方向:	CCW seen on rotor
接头:	Wire leads or terminal flat pins connecting
重量:	310g
Electrical	
绝缘强度:	1500VAC/min
转速控制:	Optional: PWM, S/C NTC themister on request
讯号输出:	Optional: R/D alarm output, F/G tachometer output
Environment	
使用温度:	-10C~+70C
保存温度:	-40C~+80C
平均预期寿命:	L10 50K hours at 40C

► Performance P-Q Curves

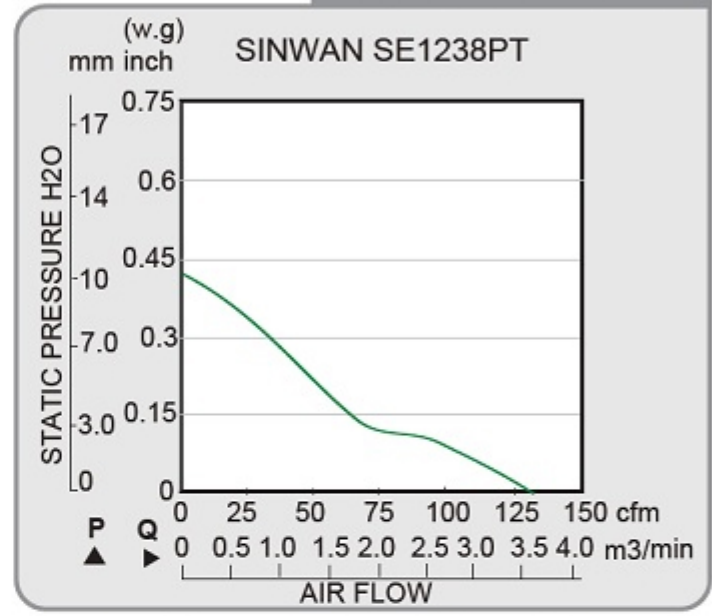

- Nomenclature
- R/D Alarm
- F/G Tach
- S/C Function
- PWM Function

► Outline Dimensions

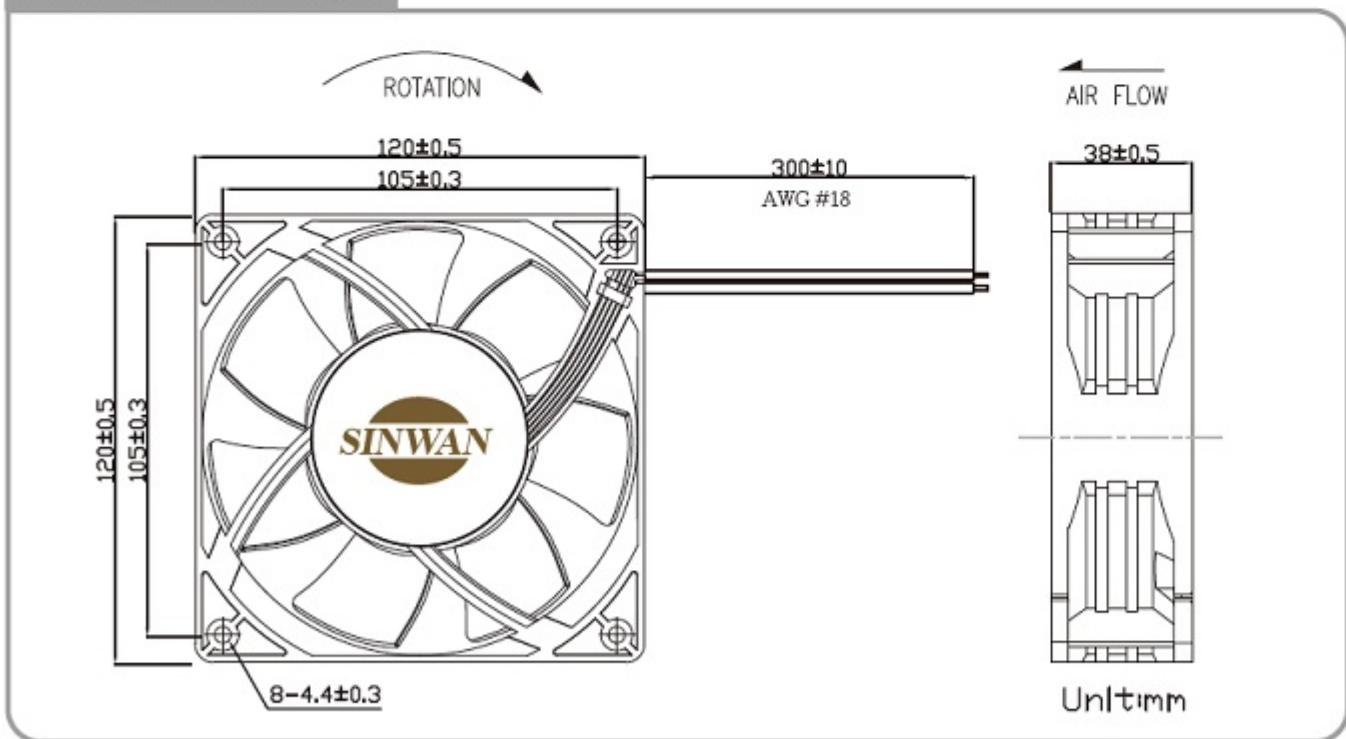

相關產品

- Metal Fan Guard
G109-15A, G109-15B, G109-17
- Plastic Fan Guard
G119P2, G119P4, G120P, G120P2, G120P25F, G120P4
- Plastic Fan Filter
GRM120-30, GRM120-45
- Metal Fan Screen
MF120S-30N



RoHS Pending