

.AC- MEA150



Sinwan AC Motor, Dia.74.5 x L.44

Max. Loading 40W, IP55

Model No	额定电压 频率		额定负载 输入		参考负载转速		无负载空转			转子锁定 马达制止		无负载 启动 电压
	VAC	Hz	Watt	RPM	Watt	Amp	Watt	Amp	转速 RPM	输入 Watt	电流 Amp	VAC
MEA150AN11-1B**	115	50/60	40/32	2300/2400	35/30	0.39/0.32	2800/3500	56/48	0.63/0.52	30/34		
MEA150AN11-2B**	115	50/60	32/28	2050/2000	27/24	0.32/0.28	2800/3490	49/42	0.51/0.45	30/34		
MEA150AN11-3B**	115	50/60	24/22	1500/1400	20/18	0.25/0.21	2800/3485	43/35	0.46/0.39	30/34		
MEA150AN22-1B**	230	50/60	40/32	2300/2400	35/30	0.21/0.17	2800/3500	56/48	0.32/0.27	62/65		
MEA150AN22-2B**	230	50/60	32/28	2050/2000	27/24	0.17/0.15	2800/3490	49/42	0.26/0.23	63/67		
MEA150AN22-3B**	230	50/60	24/22	1500/1400	20/18	0.13/0.11	2800/3485	43/35	0.23/0.19	65/68		

** = DC / DR / UC / UR / DUC / DUR / NC / NR, 完整型号请按 "Nomenclature" 来选择所需马达
 第一* = D, U, DU, N 代表马达轴心突出位置, 第二* = C, R 代表马达旋转方向
 Example: MEA150AN11-1BDR, **/DR= Shaft outlet- D type, motor rotating direction viewed from rotor CCW-R type
 • 100, 200, 240V 或特殊电压 12, 24, 28, 38, 42, 48, 380, 440, 480V... 50/60Hz, 任何电压都可订做。
 • 双速 高/中 1速/2速, 中/低 2速/3速 可依需求制造。
 • 信湾保留修改资料与改良电子&机械设计的权利, 无须告知。资料公差 +/-10%

Motor

马达类别: Shaded pole, outer rotor, 2 pole, single phase, thermal protection.

IP 防护: IP55

Mechanical

外框: Aluminum diecasting bracket, 17 mounting holes dia.3.2mm or tapped M4

轴承: Two high precision permanently lubricated ball bearings

轴心: Stainless steel SUS420J2, dia.6mm, L.30mm, optional configurations

重量: -

Electrical

绝缘强度: Over 1 min. At 1,500VAC, 0.5mA, 50/60 Hz

绝缘电阻: Over 100 Mega Ohm at DC500V, between leads and frame


讯号输出: Motor slow down alarm R/D, tacho speed sensor F/G

Environment

使用温度: Acceptable -25°C~+65°C. Storage -30°C~+105°C (65%RH)


平均预期寿命: Rated loading continuous duty 65K hrs at 45°C, 40K hrs at 60°C. MTBF95K hrs at 35°C

Curves

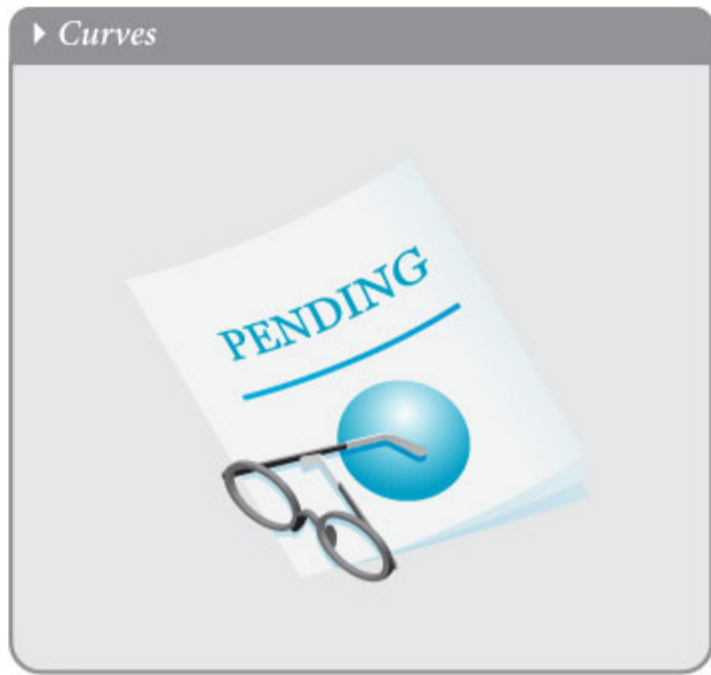

Nomenclature

Outline Dimensions

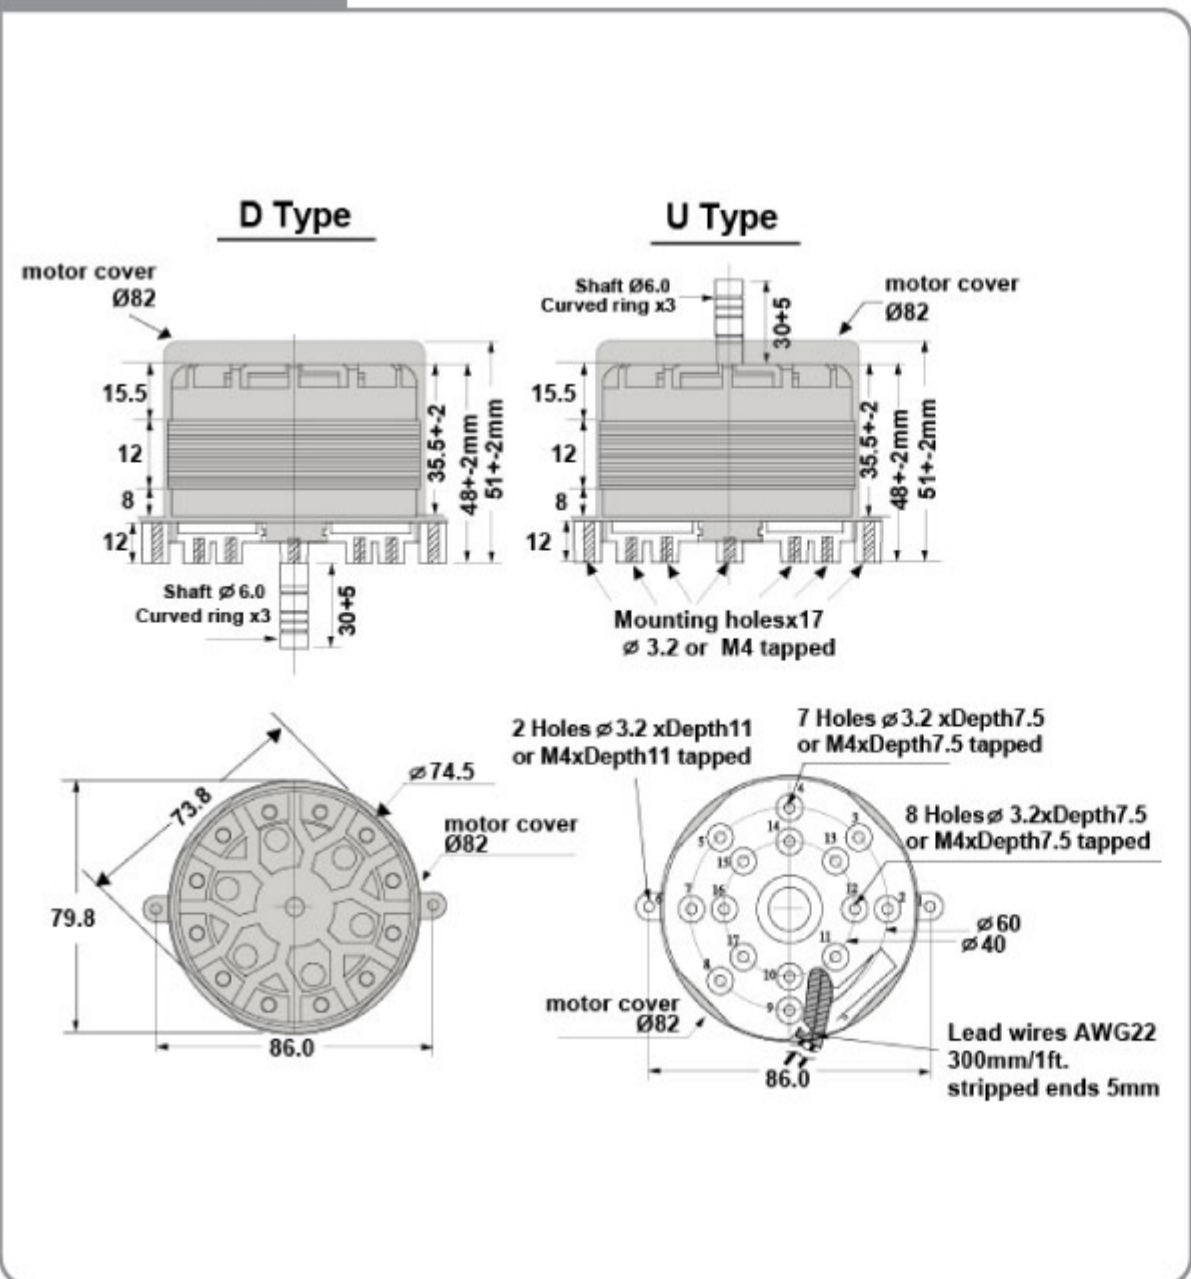

相關產品