




**AC 3.5E**

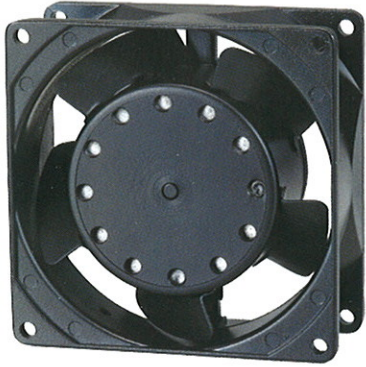

**SIZE :**

92x92x38mm (3.62"x3.62"x1.50")

**CONSTRUCTION :**

- All metal
- Die-cast aluminum housing
- Metal impeller
- Shaded pole motor
- Impedance protected
- Leader wire available

**OPERATING TEMPERATURE :**

Ball bearing - 30°C to +75°C  
 Sleeve bearing - 10°C to +70°C

**WEIGHT :**

470 grams

**Specifications**

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE	FREQUENCY	MAX. RATED CURRENT	MAX. INPUT POWER	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VAC	Hz	mA	W	R.P.M.	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	
3.5E-115HB	Ball	115	50/60	250/240	16/14	2600/3000	1.4/1.6	48.9/55.5	5.7/7.3	0.2/0.3	38/43
3.5E-115HS	Sleeve										
3.5E-230MB	Ball	230	50/60	140/130	15/13	2000/2200	0.9/1.0	32/34	2.8/3.0	0.1/0.1	30/33
3.5E-230HB	Ball										
3.5E-230HS	Sleeve										

