



1238 《120×120×38》MM

General Specifications

- ◆ Material-----Frame:plastic(UL94V0)
Impeller:plastic(UL94V0)
Lead wire:UL1571AWG#28 or Equivalent(+Red,-)Black
- ◆ Expected Life-----Ball Bearing 50,000hrs(25 °C)
Sleeve Bearing 30,000hrs(25 °C)
- ◆ Safety standards-----RoHS CE FCC
- ◆ DC Fan Specials-----RD FG PWM IP54
- ◆ Temperature Range-----Operating temperature -10 °C ~70 °C(Non-condensing)
Storage temperature -40 °C ~70 °C(Non-condensing)



Details

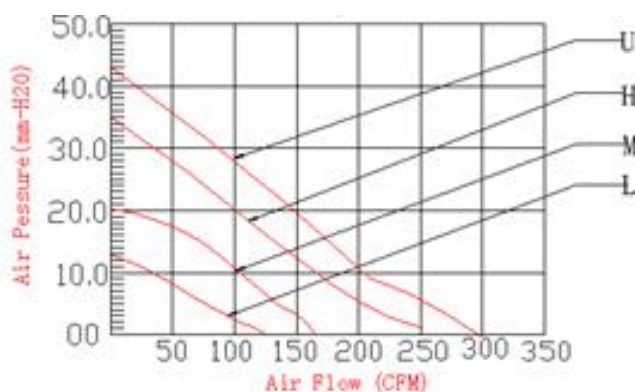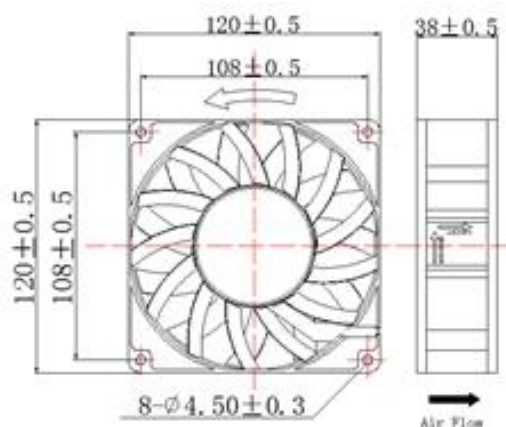

*Air exhaust over struts, Rotational direction CCW looking at rotor.

Specifications

Model	Bearing Type	Rated Voltage	operation Voltage	Current	Speed	Air Flow	Pressure	Noise	Weight
		VDC	VDC	A	PRM	CFM	mmH ₂ O	dBA	g
D4715N-04W-B75	Sleeve/Ball	12	10.8~13.2	2.6	4500	234.65	27.2	64.6	380
D4715N-04W-B74				1.86	4000	209.11	21.53	61.7	
D4715N-04W-B73				1.3	3500	183.6	16.66	58.5	
D4715N-05W-B75	Sleeve/Ball	24	21.8~26.4	1.9	5000	260.3	33.42	67.9	
D4715N-05W-B74				1.3	4500	234.65	27.2	64.6	
D4715N-05W-B73				0.93	4000	209.11	21.53	61.7	
D4715N-07W-B75	Sleeve/Ball	48	43.6~52.8	0.95	5000	260.3	33.42	67.9	
D4715N-07W-B74				0.65	4500	234.65	27.2	64.6	
D4715N-07W-B73				0.46	4000	209.11	21.53	61.7	