



**PRODUCT SPECIFICATION
APPROVAL SHEET**

产品规格承认书

一. Sample Specification (样品规格)

Item (项目)	Specification/Condition (规格/条件)
01 Part No. (成品料号)	A8824N-23L-B05/W700
02 Outline Dimension (尺寸规格)	220*220*60mm
03 Rated Voltage (额定电压)	AC 220V
04 Voltage Range (电压范围)	AC 200V~240V
05 Start voltage (启动电压)	220V
06 Frequency (频率)	50HZ
07 Rated Current (额定电流)	MAX 0.30A
08 Rated Consumption (额定功率)	MAX 44W
09 Speed (转速)	2300RPM±10%
10 Max. Air flow (最大风量)	N/A
11 Max. Static Pressure (最大静压)	N/A
12 Noise Level (噪音)	N/A
13 Weight (重量)	N/A

二. Electrical Specification (电气规格):

Item (项目)	Specification/Condition (规格/条件)
01 Dielectric Strength (绝缘耐压)	1800V/5mA/2s
02 coil Resistance (线圈阻抗)	200Ω ±8%
03 Temperature Test of Run (运转温升)	N/A Rated Voltage (额定电压)
04 Locked Rotor Protection (锁定检测)	N/A Rated Voltage (额定电压)

三. Environmental Specification (环境条件):


Item (项目)	Specification/Condition (规格/条件)
01 Operating Temp. Range	Temperature/温度: -10° C ~ 60° C

	(工作温/湿度范围)	Humidity/湿度 : 35%~85%RH
02	Storage Temperature (保存温/湿度范围)	Temperature/温度 ; -40° C ~ +75° C Humidity/湿度: 35%~85%RH
03	Life (寿命)	One year


四.Main Materials/Parts Specification(主要材料/零件规格)：

Item (项目)		Specification (规格)
01	Blade (扇叶)	PBT
02	Frame (框架)	Al
03	Stator& Rotor (定子与转子)	1300矽钢片/1300矽钢片+AL
04	Magnet Wires (漆包线)	Copper UEW-2/B
05	Bobbin (绝缘架)	PA66

五.Model Explain (型号说明)：

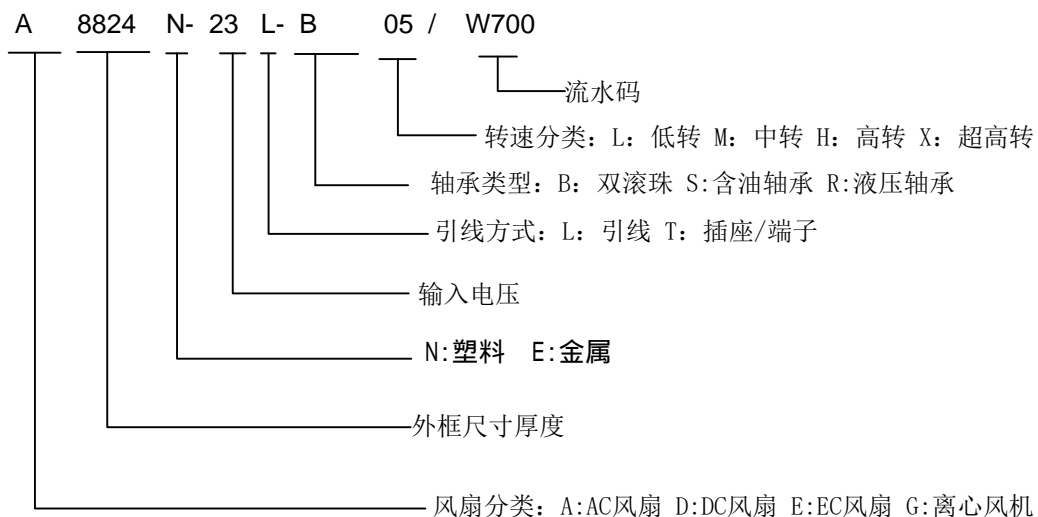

七. Outline Dimension (外观尺寸图)

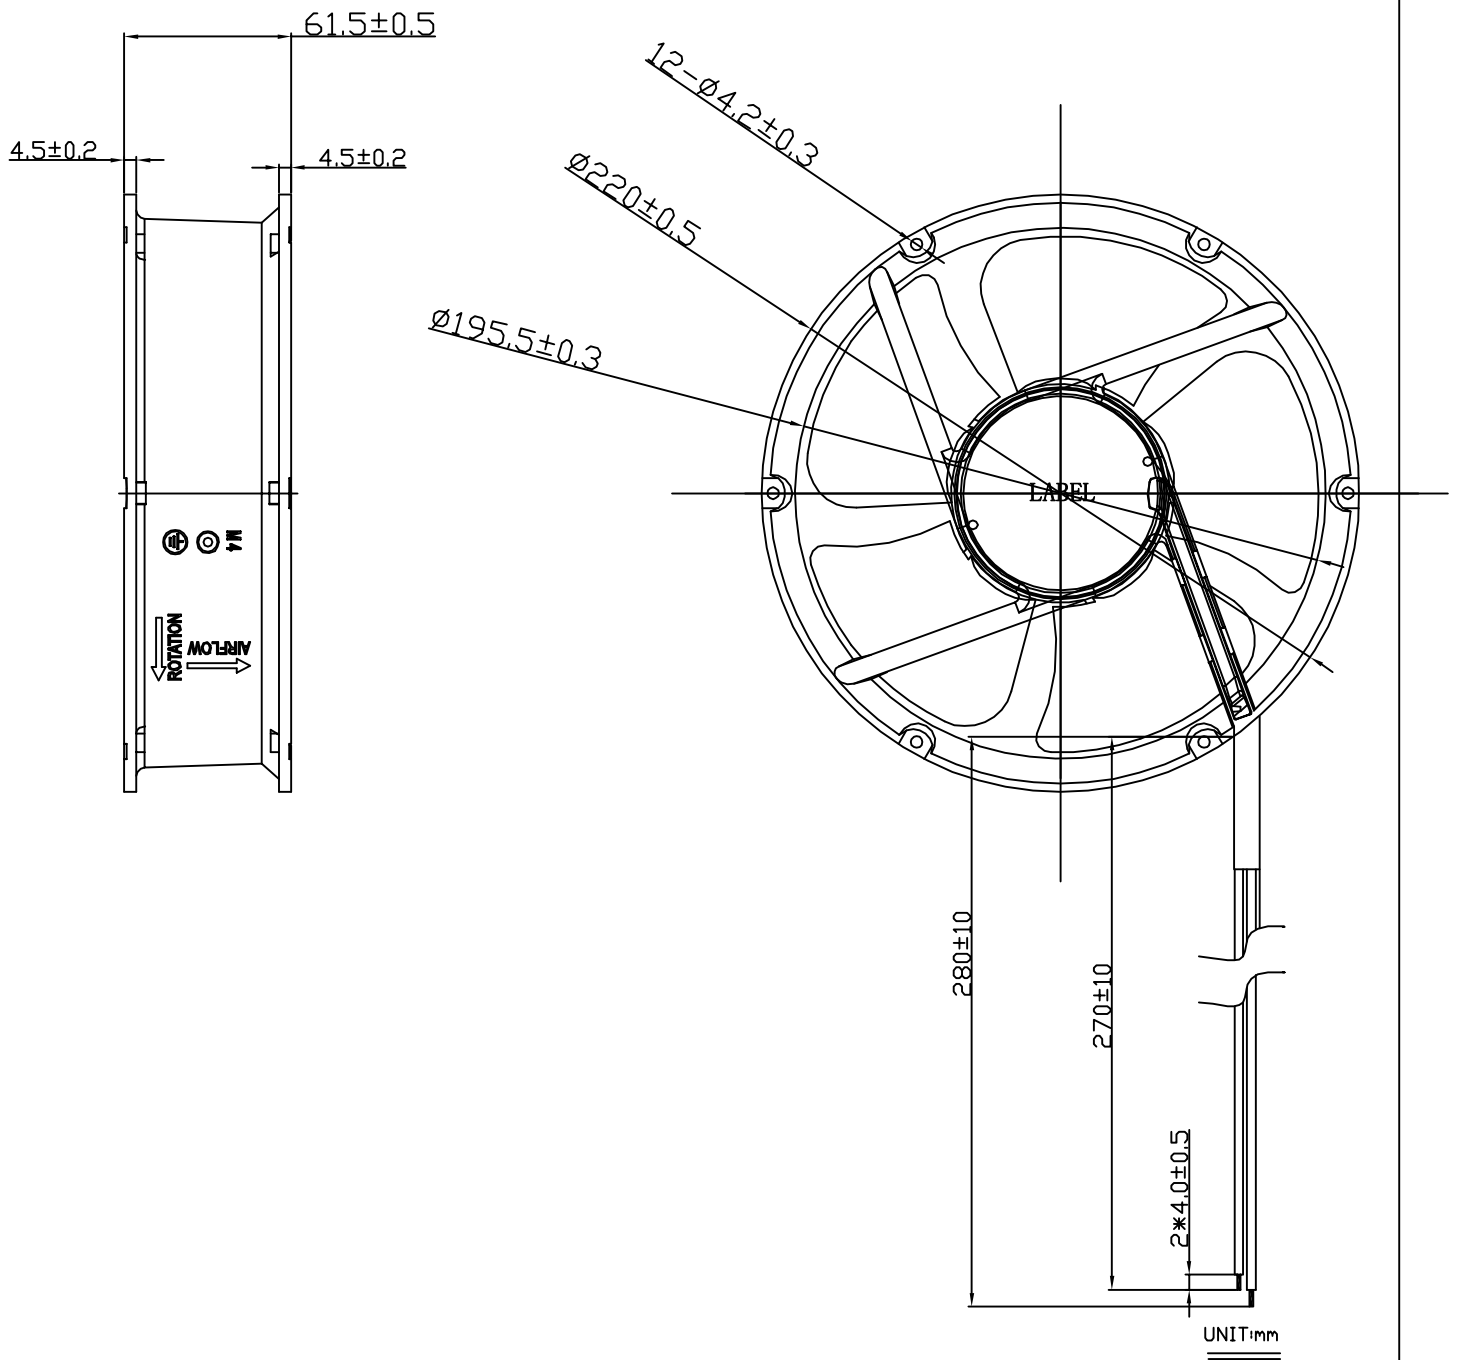

NOTES:

1. LEAD WIRES: PVC WIRES UL1015AWG#18 BLACK

Above specification is only for reference and subject to change without notice.
 (以上数据仅供参考, 如有变更恕不另行通知)