



40x40x56 mm

San Ace 40 9CRD type

DC

General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 547.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Inlet Red Black Yellow Brown
Outlet Orange Gray Purple White
- Mass 90 g

Specifications

The models listed below have pulse sensors with PWM control function.


Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹] Inlet Outlet	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9CRD0412P5J03	12	10.8 to 13.2	100	1.15	13.8	19000 12600	0.87 30.72	630 2.53	61	-20 to +70	40000/60°C
			0	0.12	1.44	3700 2500	0.15 5.3	25 0.1	22		
9CRD0412P5G03	12	10.8 to 13.2	100	0.9	10.8	16700 11250	0.77 27.19	500 2.01	58		
			0	0.1	1.2	3350 2250	0.13 4.59	21 0.08	21		
9CRD0412P5H03	12	10.8 to 13.2	100	0.6	7.2	15000 10000	0.7 24.72	410 1.65	56		
			0	0.09	1.08	3000 2000	0.12 4.24	16 0.06	20		
9CRD0412P5M03	12	10.8 to 13.2	100	0.52	6.24	14000 9300	0.65 22.95	360 1.45	54		
			0	0.07	0.84	2000 1300	0.07 2.47	7 0.03	15		

* PWM frequency: 25 kHz


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRD0412P5J03 With pulse sensor with PWM control function


PWM duty cycle

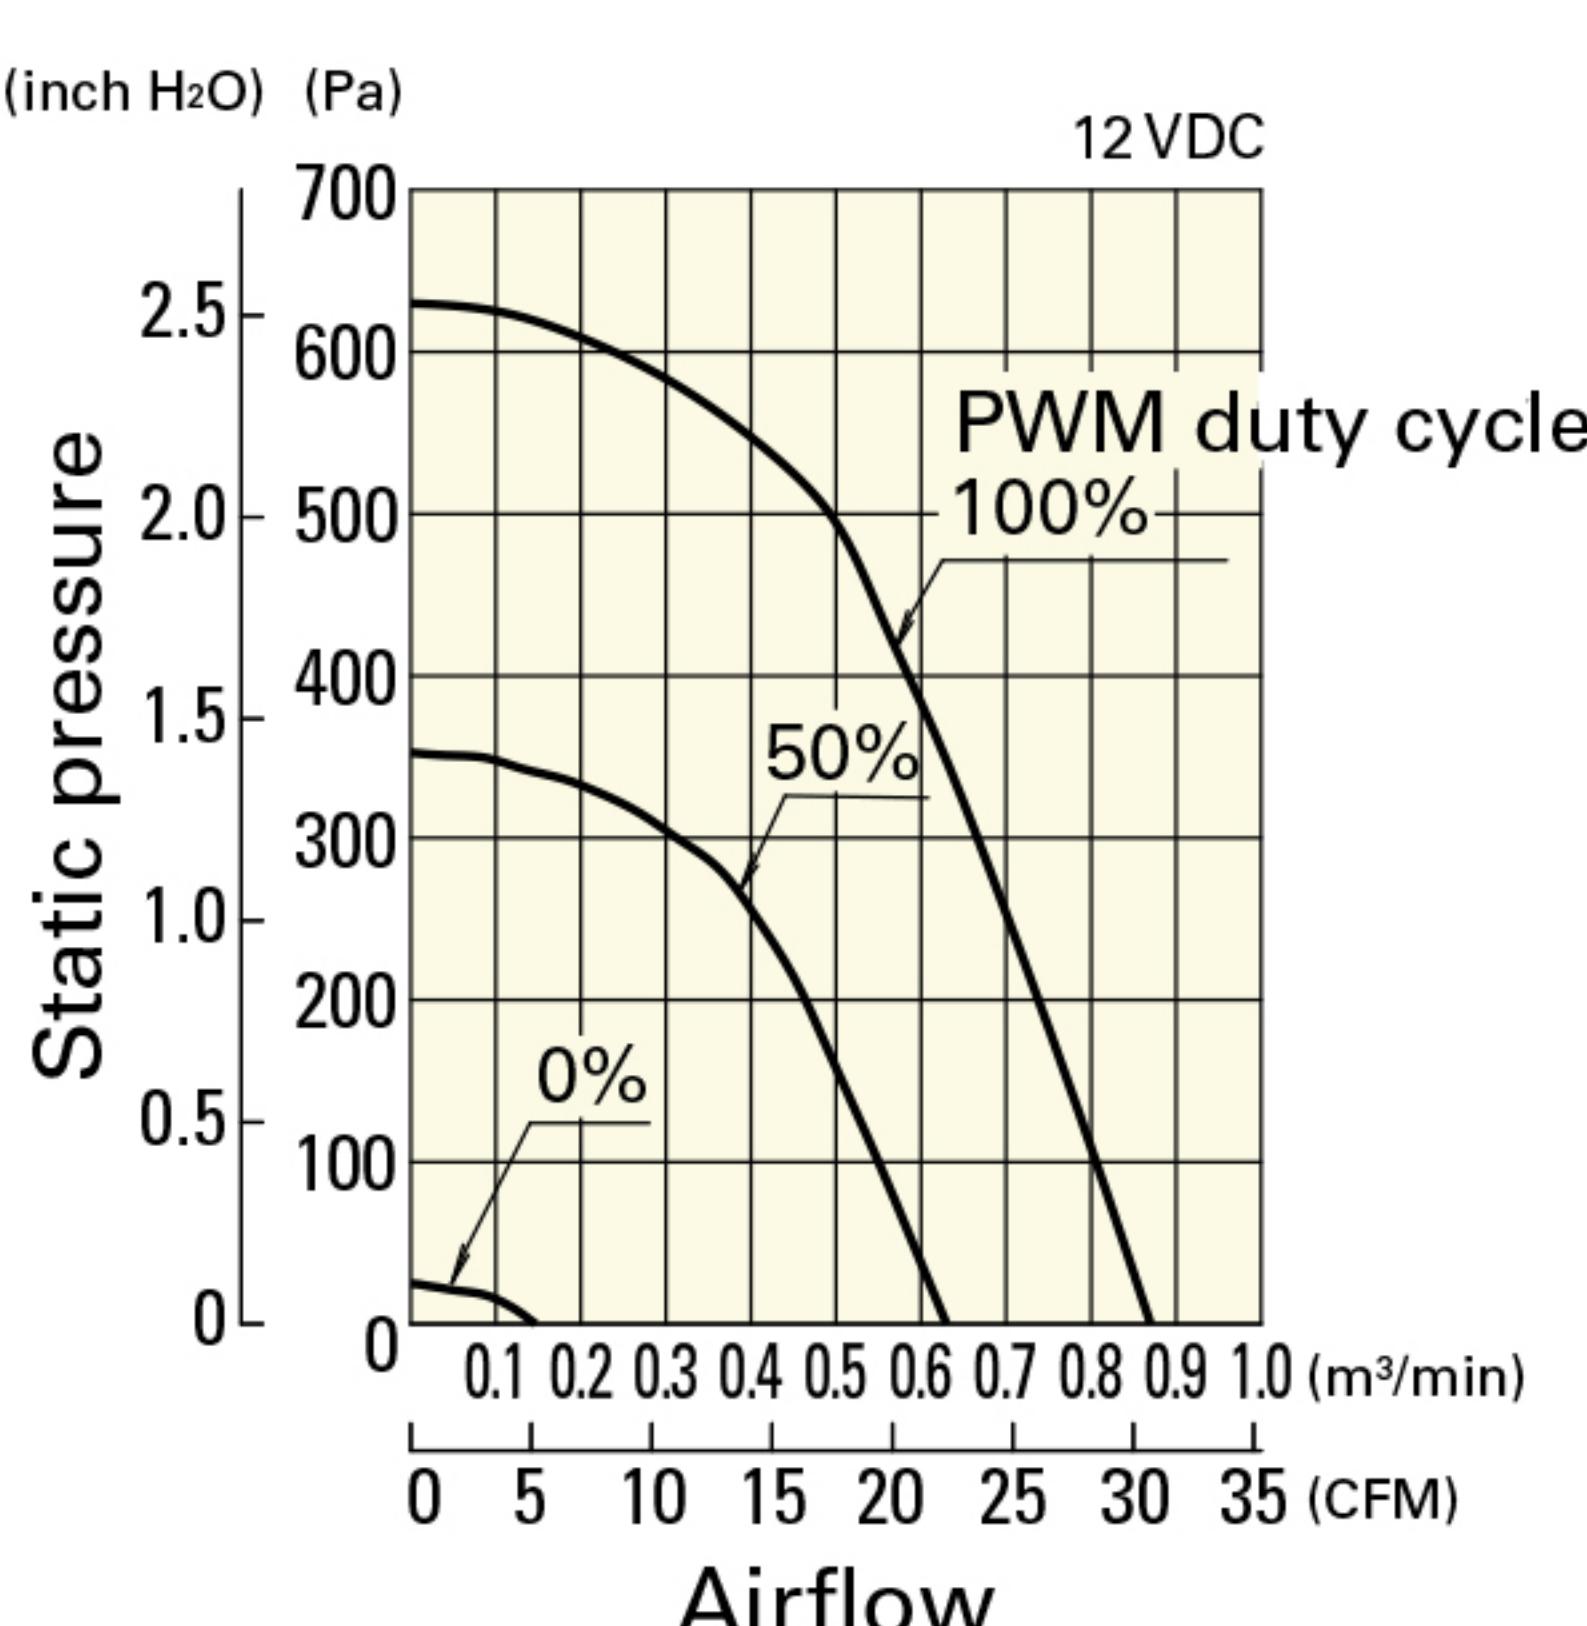

Operating voltage range

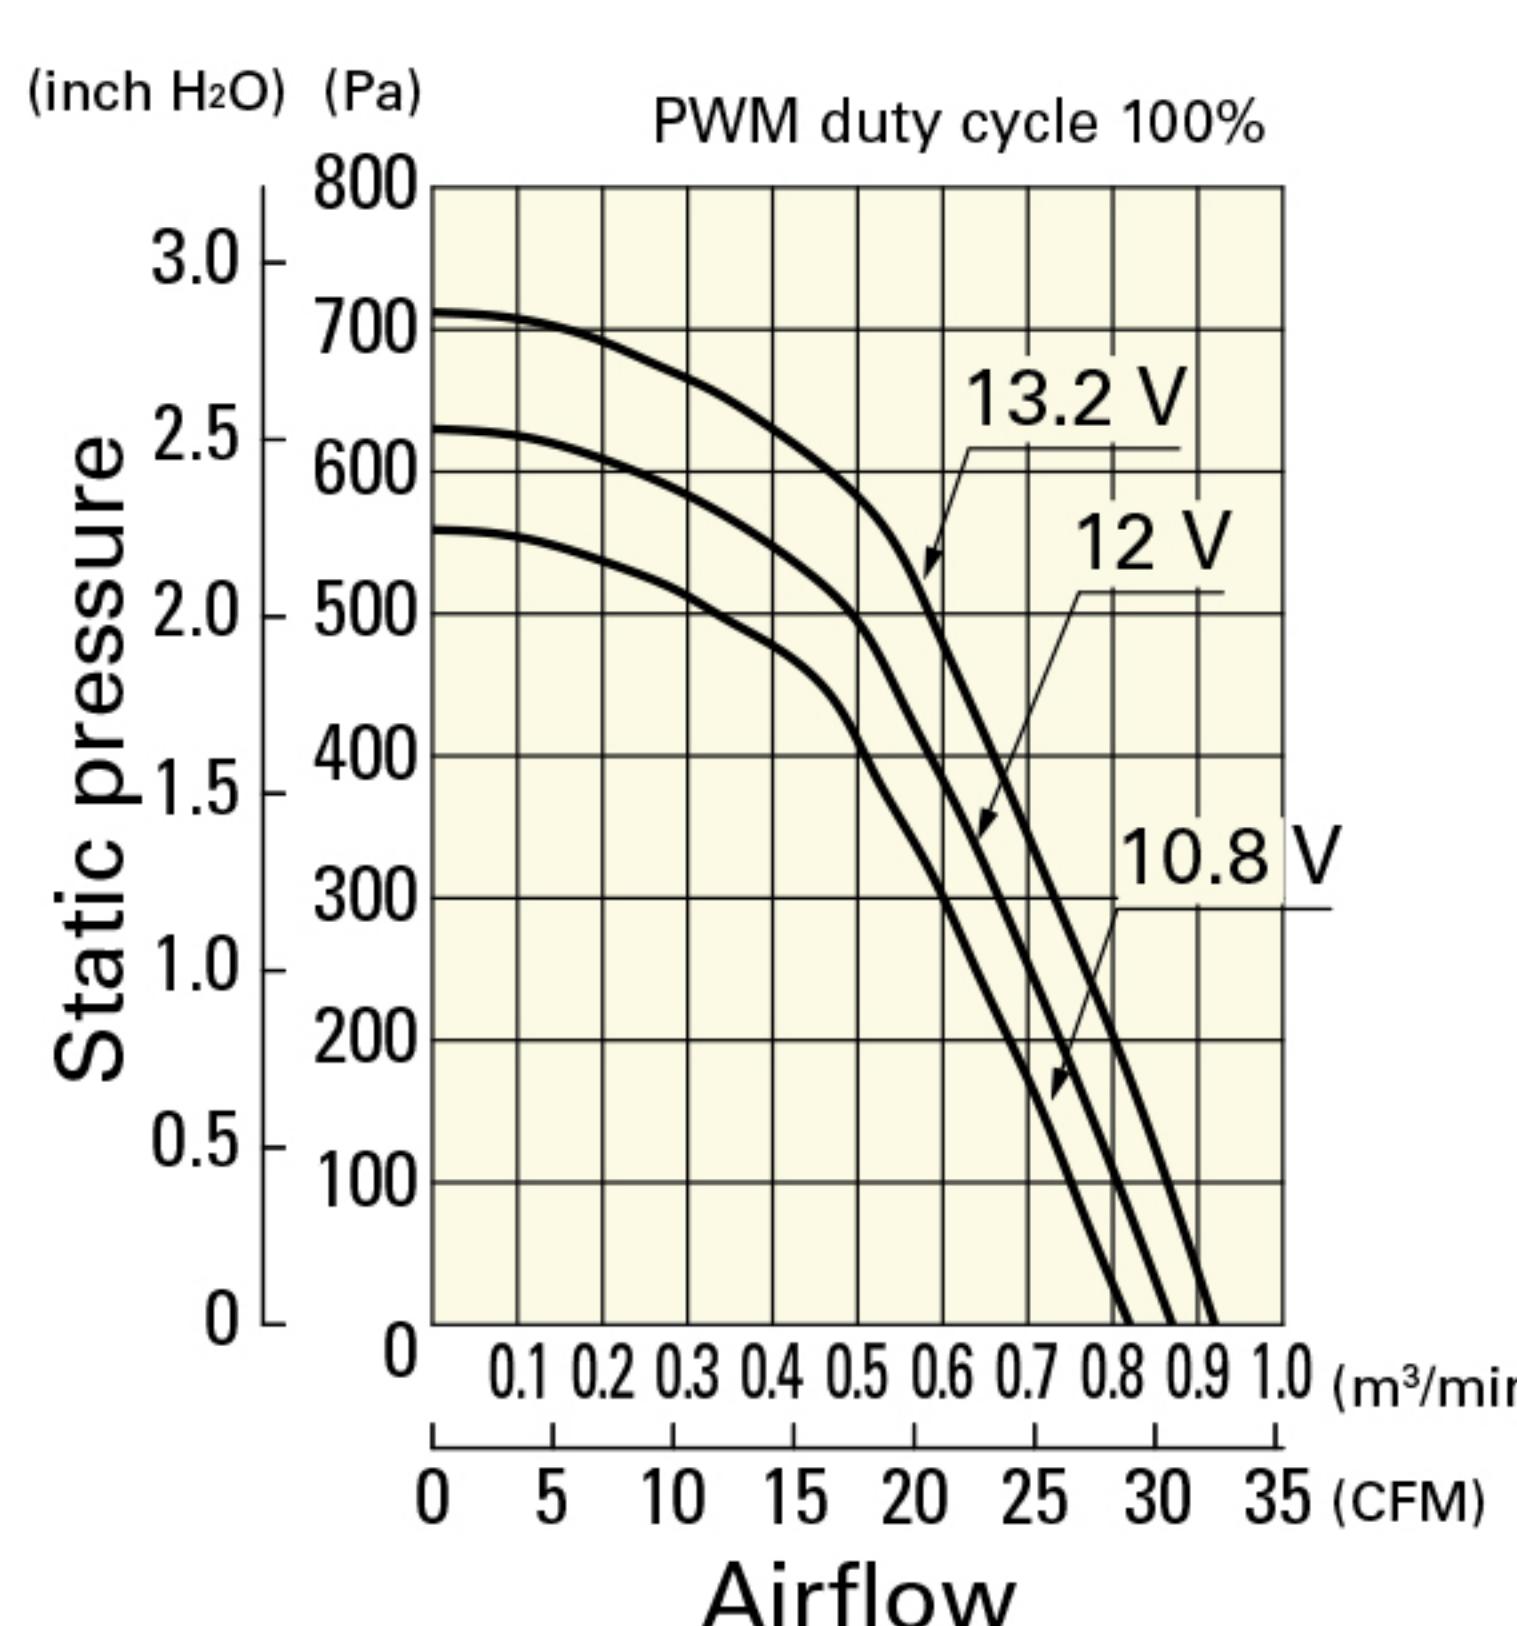


PWM duty - Speed characteristics example

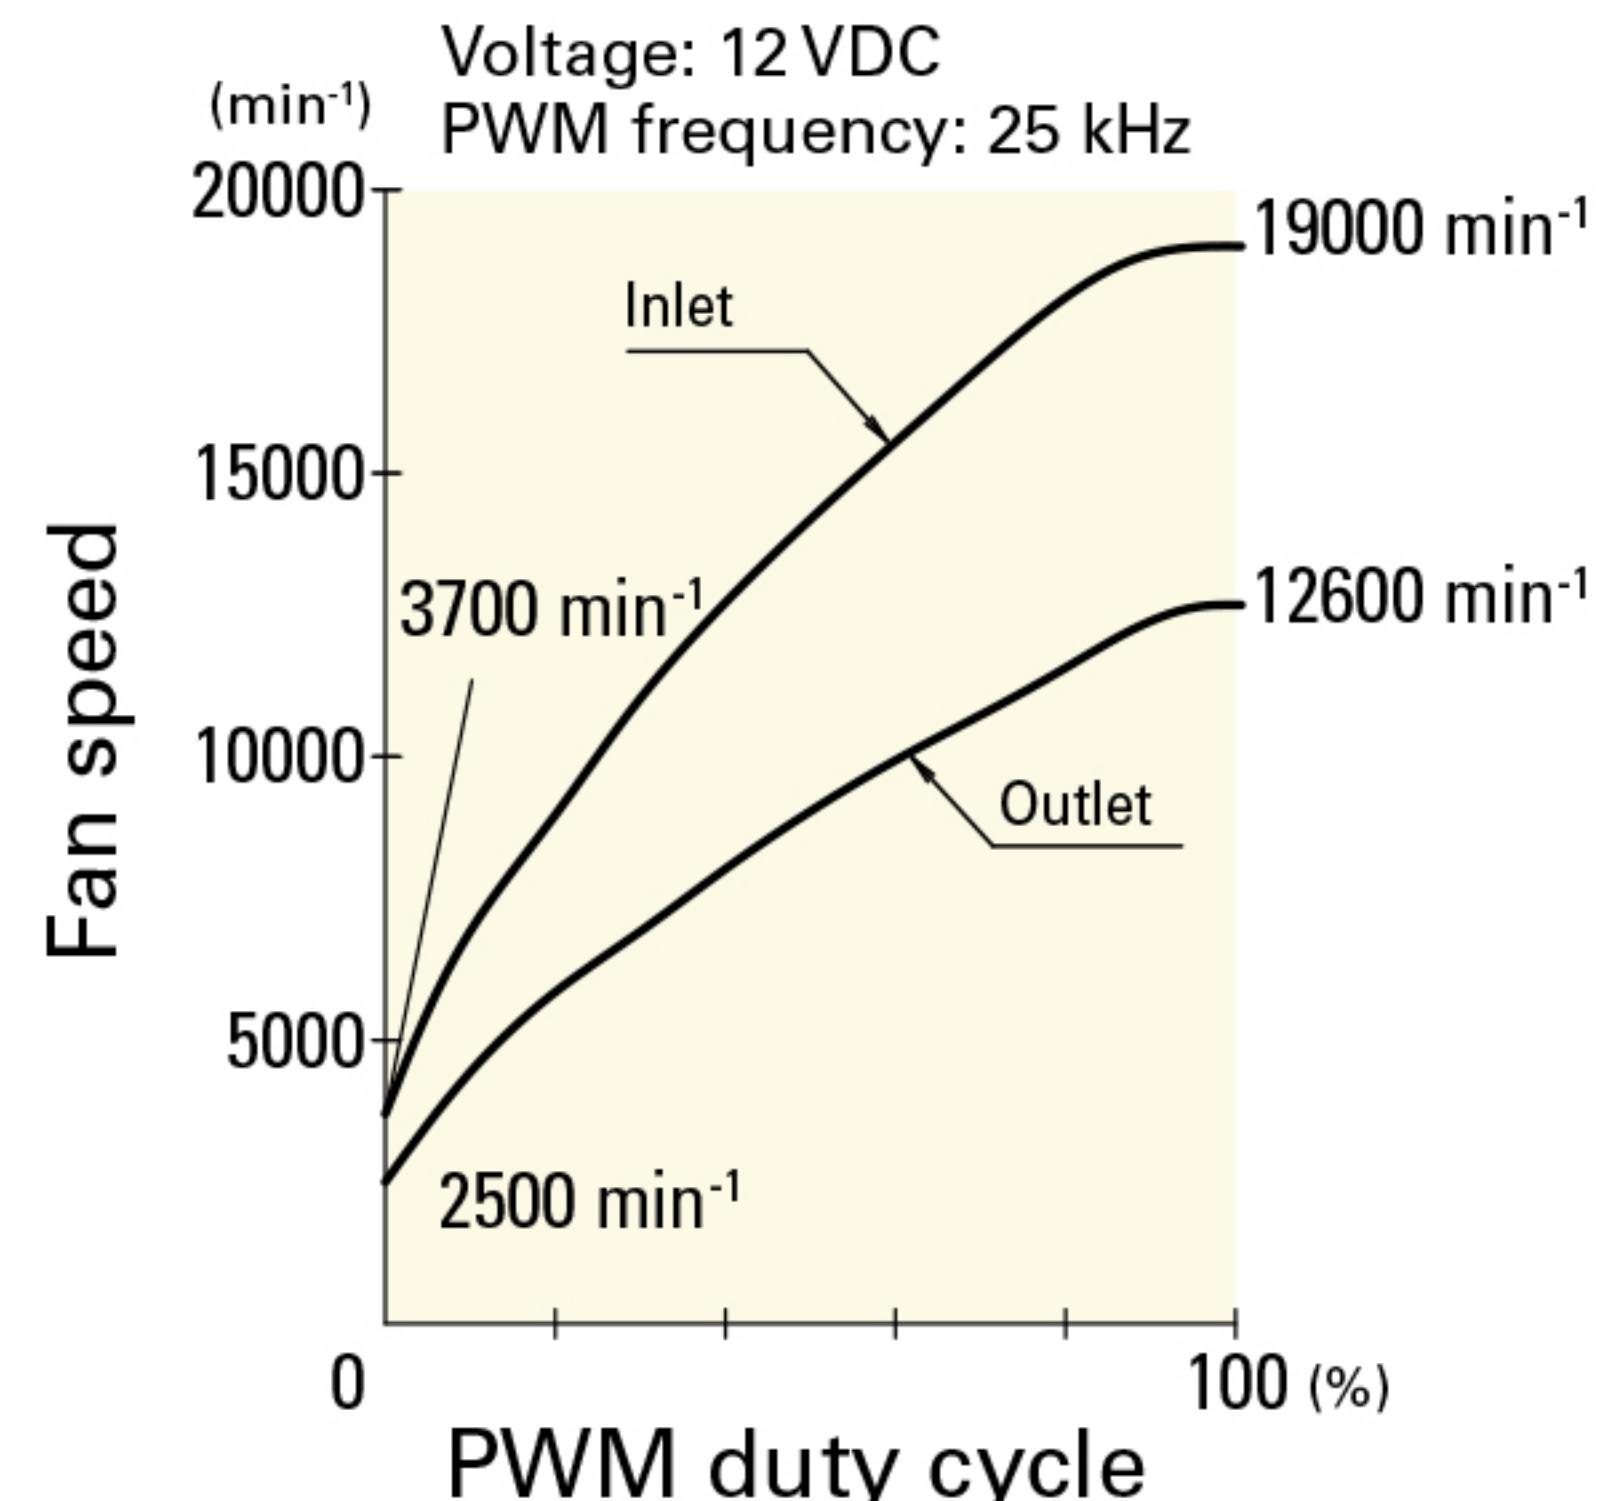


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRD0412P5G03 With pulse sensor with PWM control function


PWM duty cycle

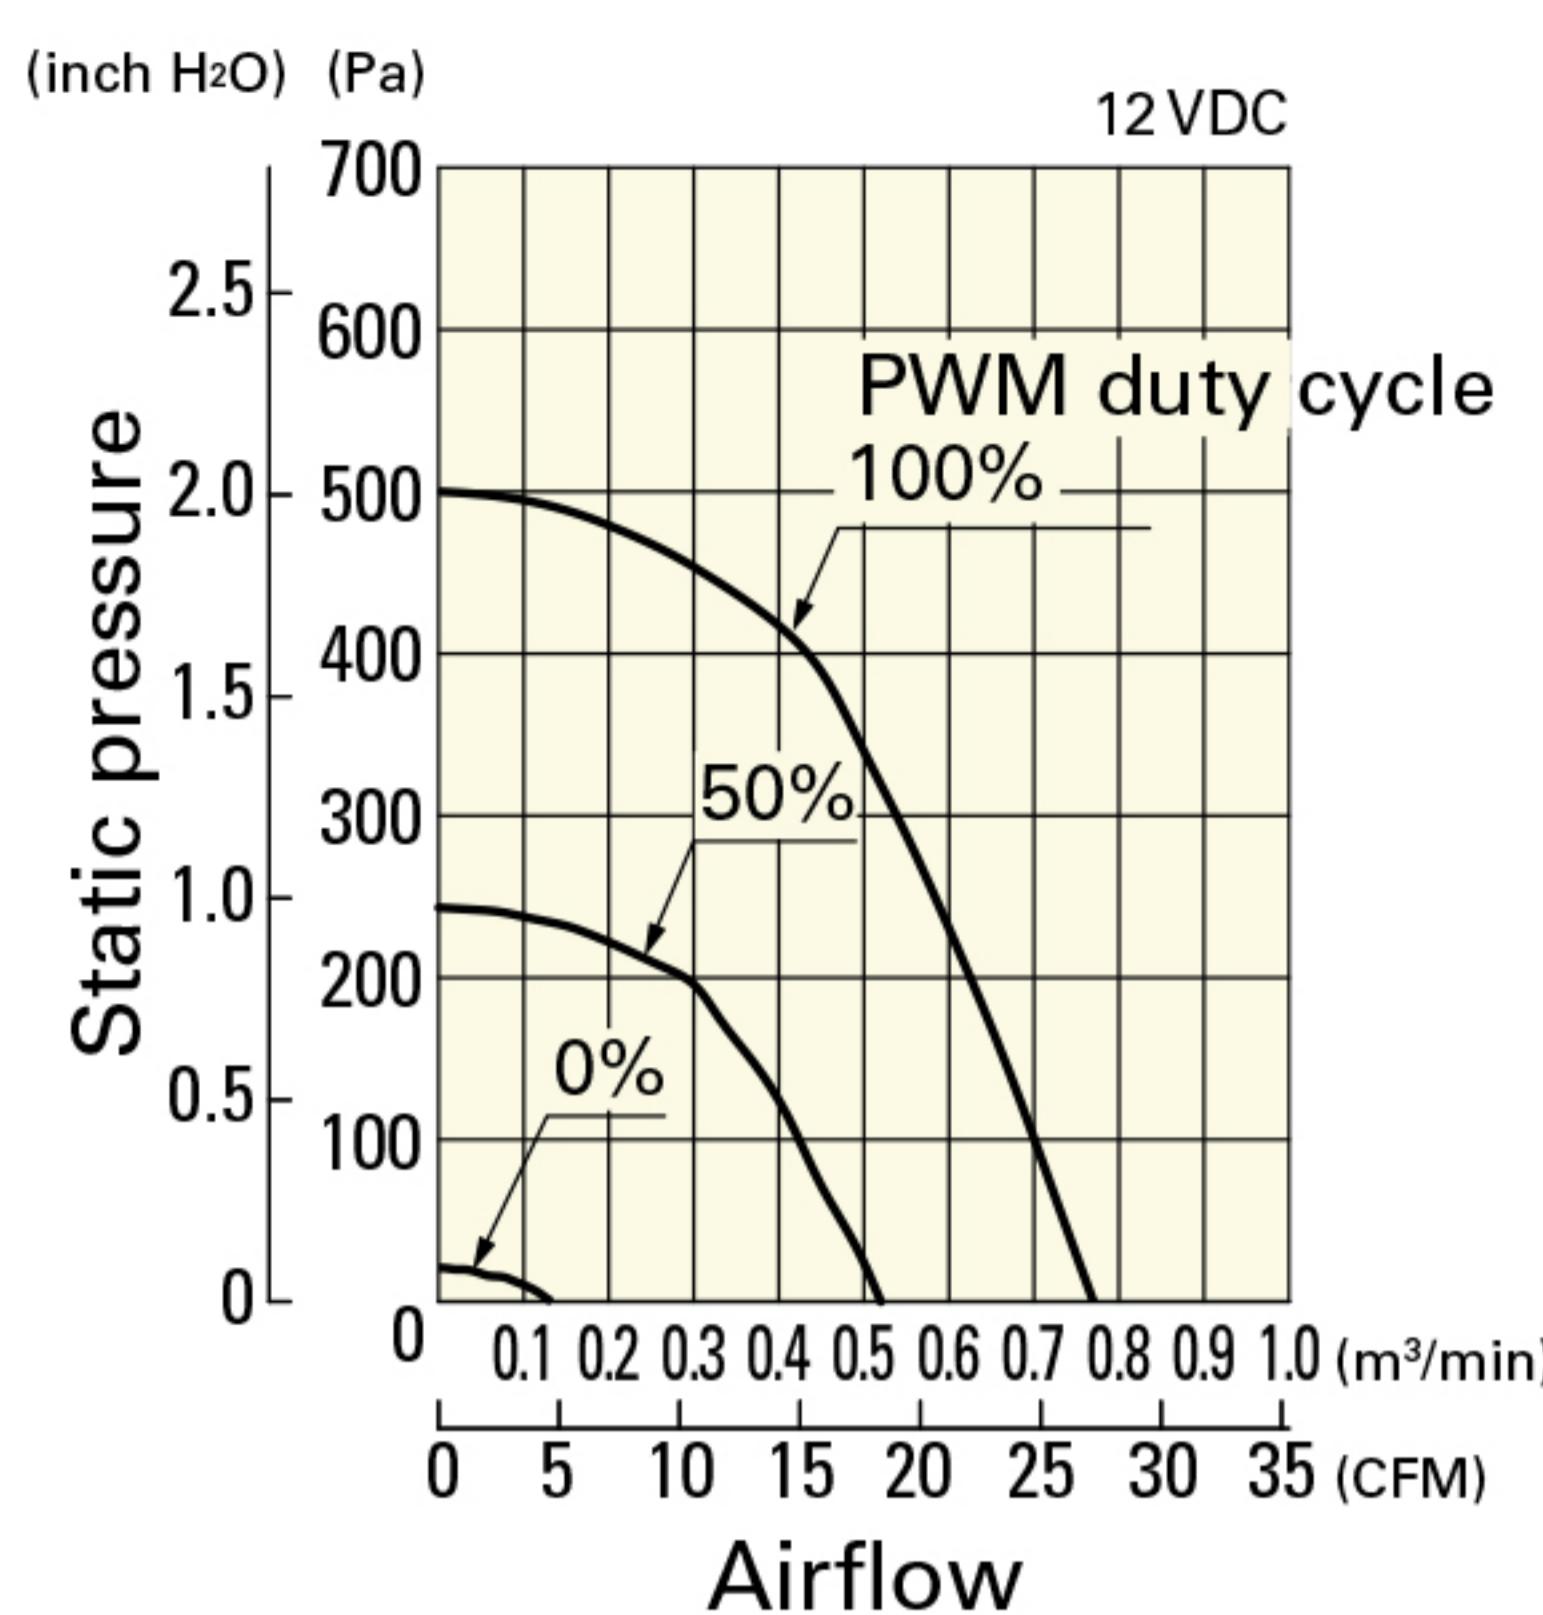

Operating voltage range

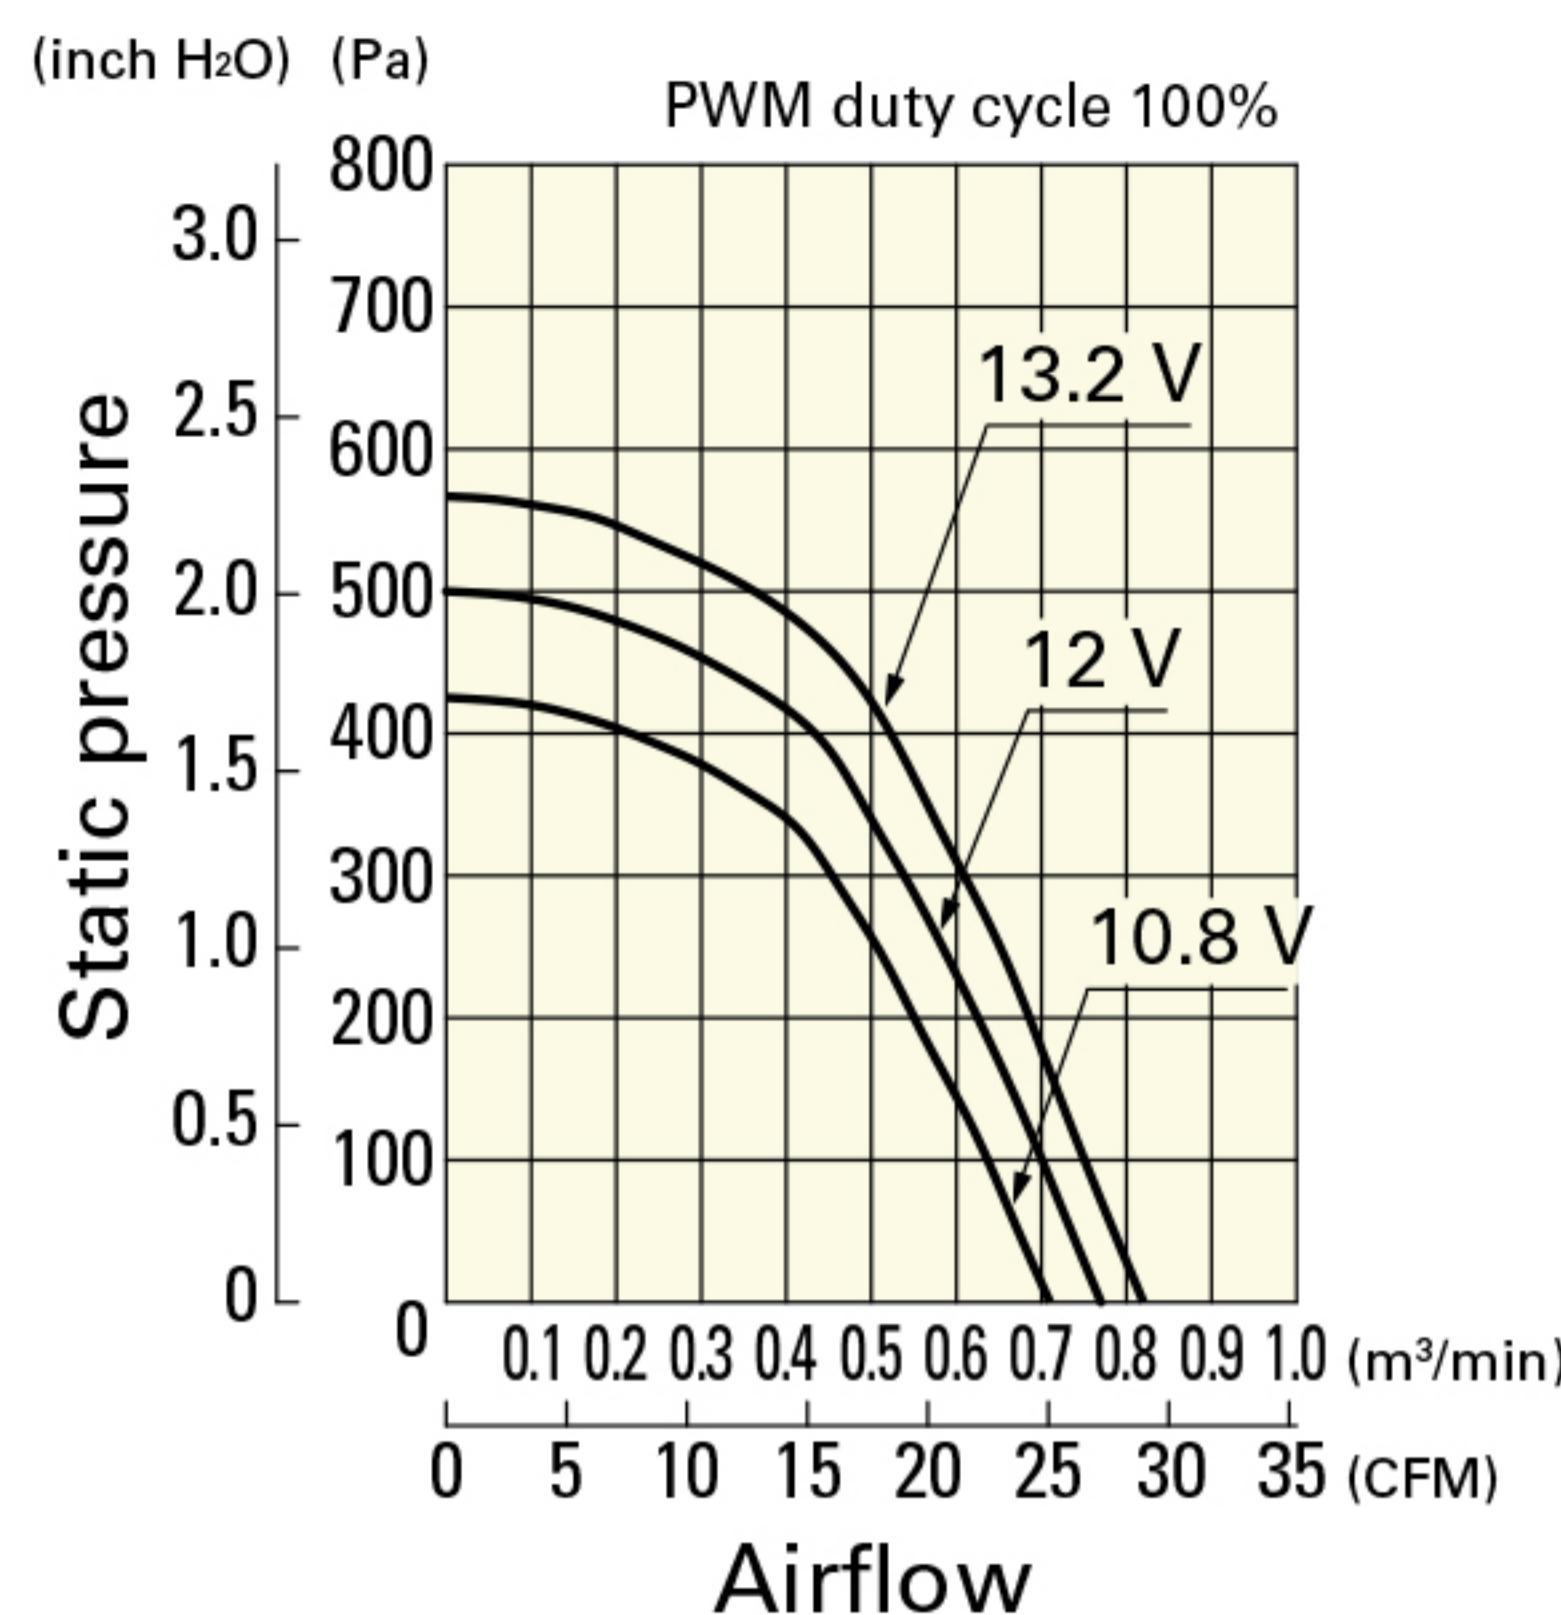


PWM duty - Speed characteristics example

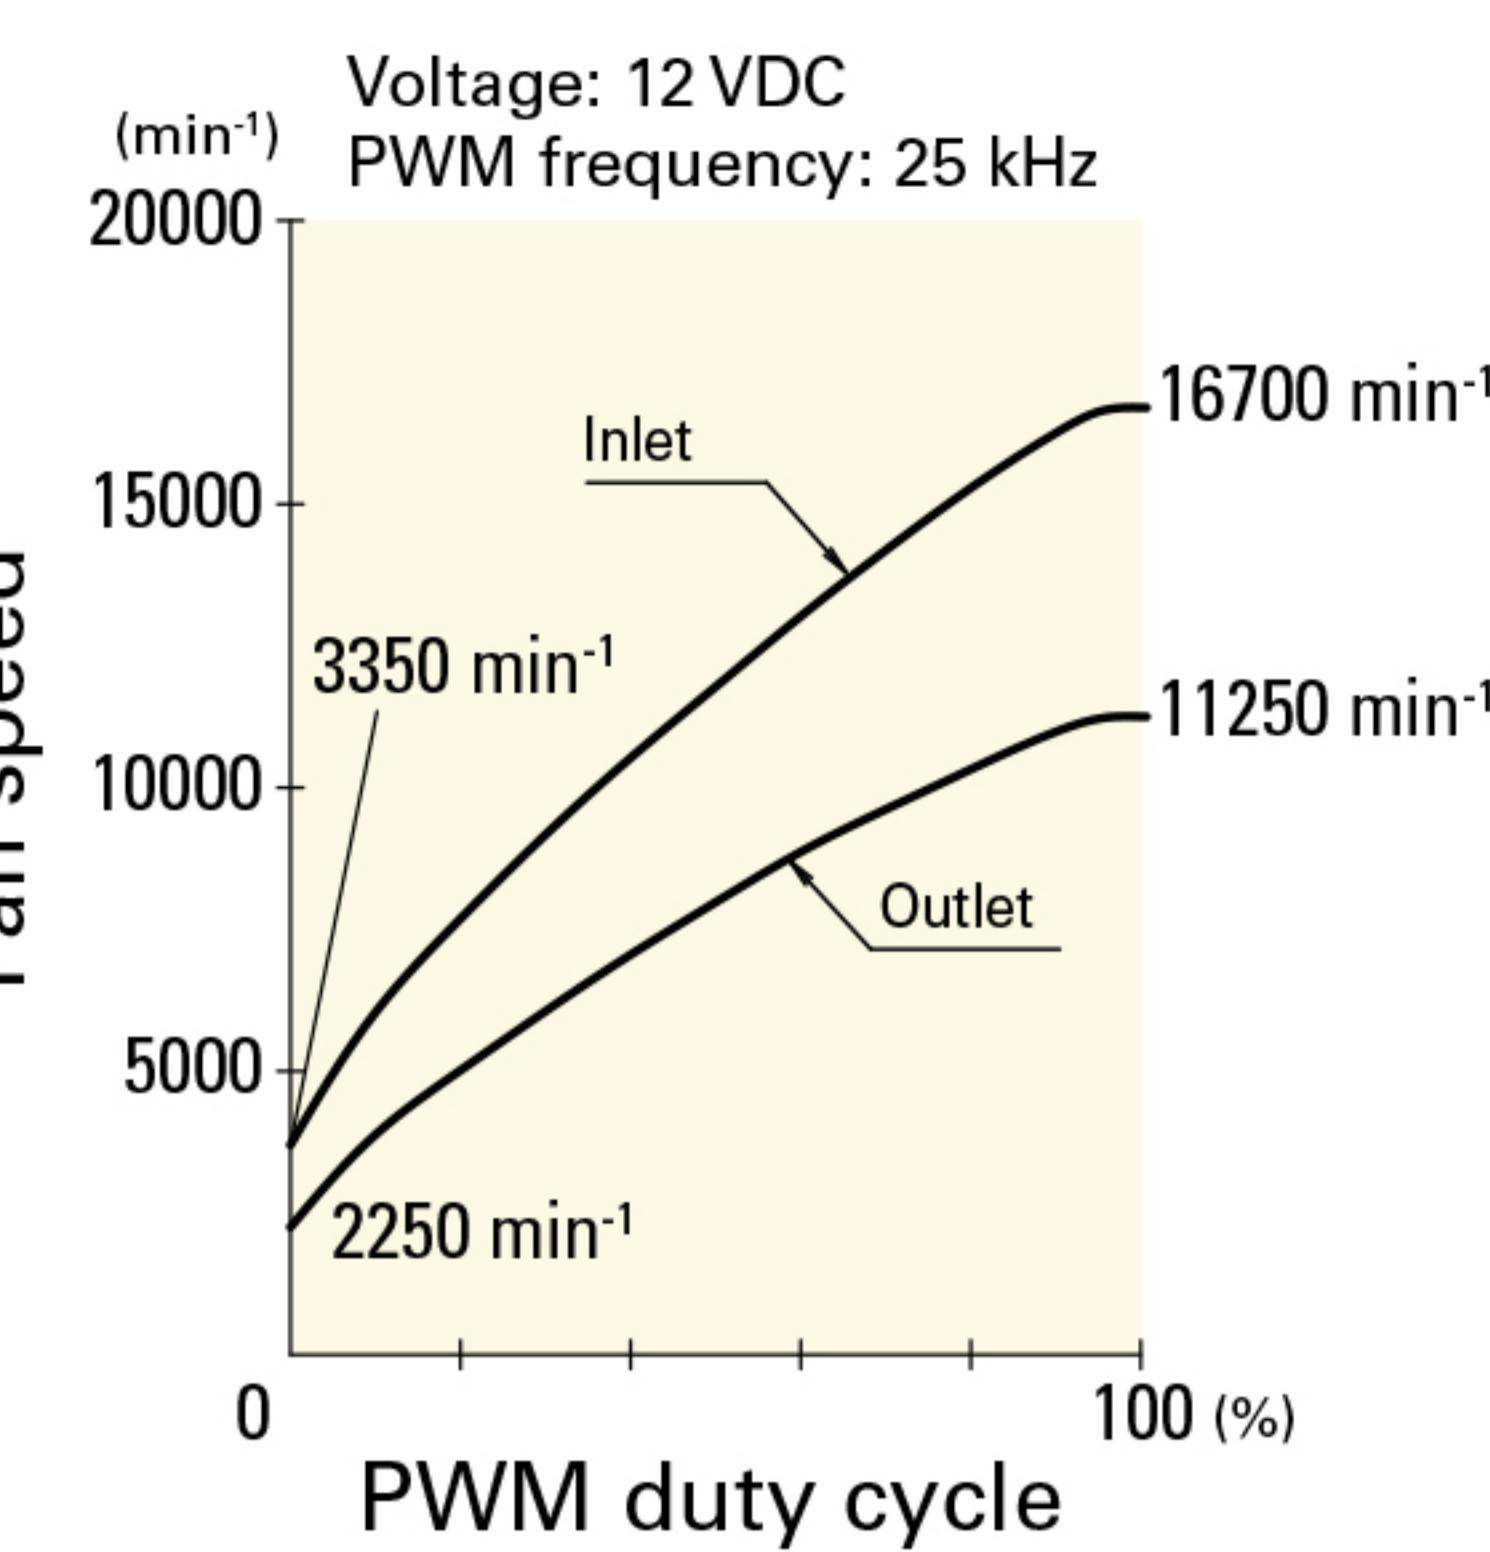


9CRD0412P5H03 With pulse sensor with PWM control function


PWM duty cycle

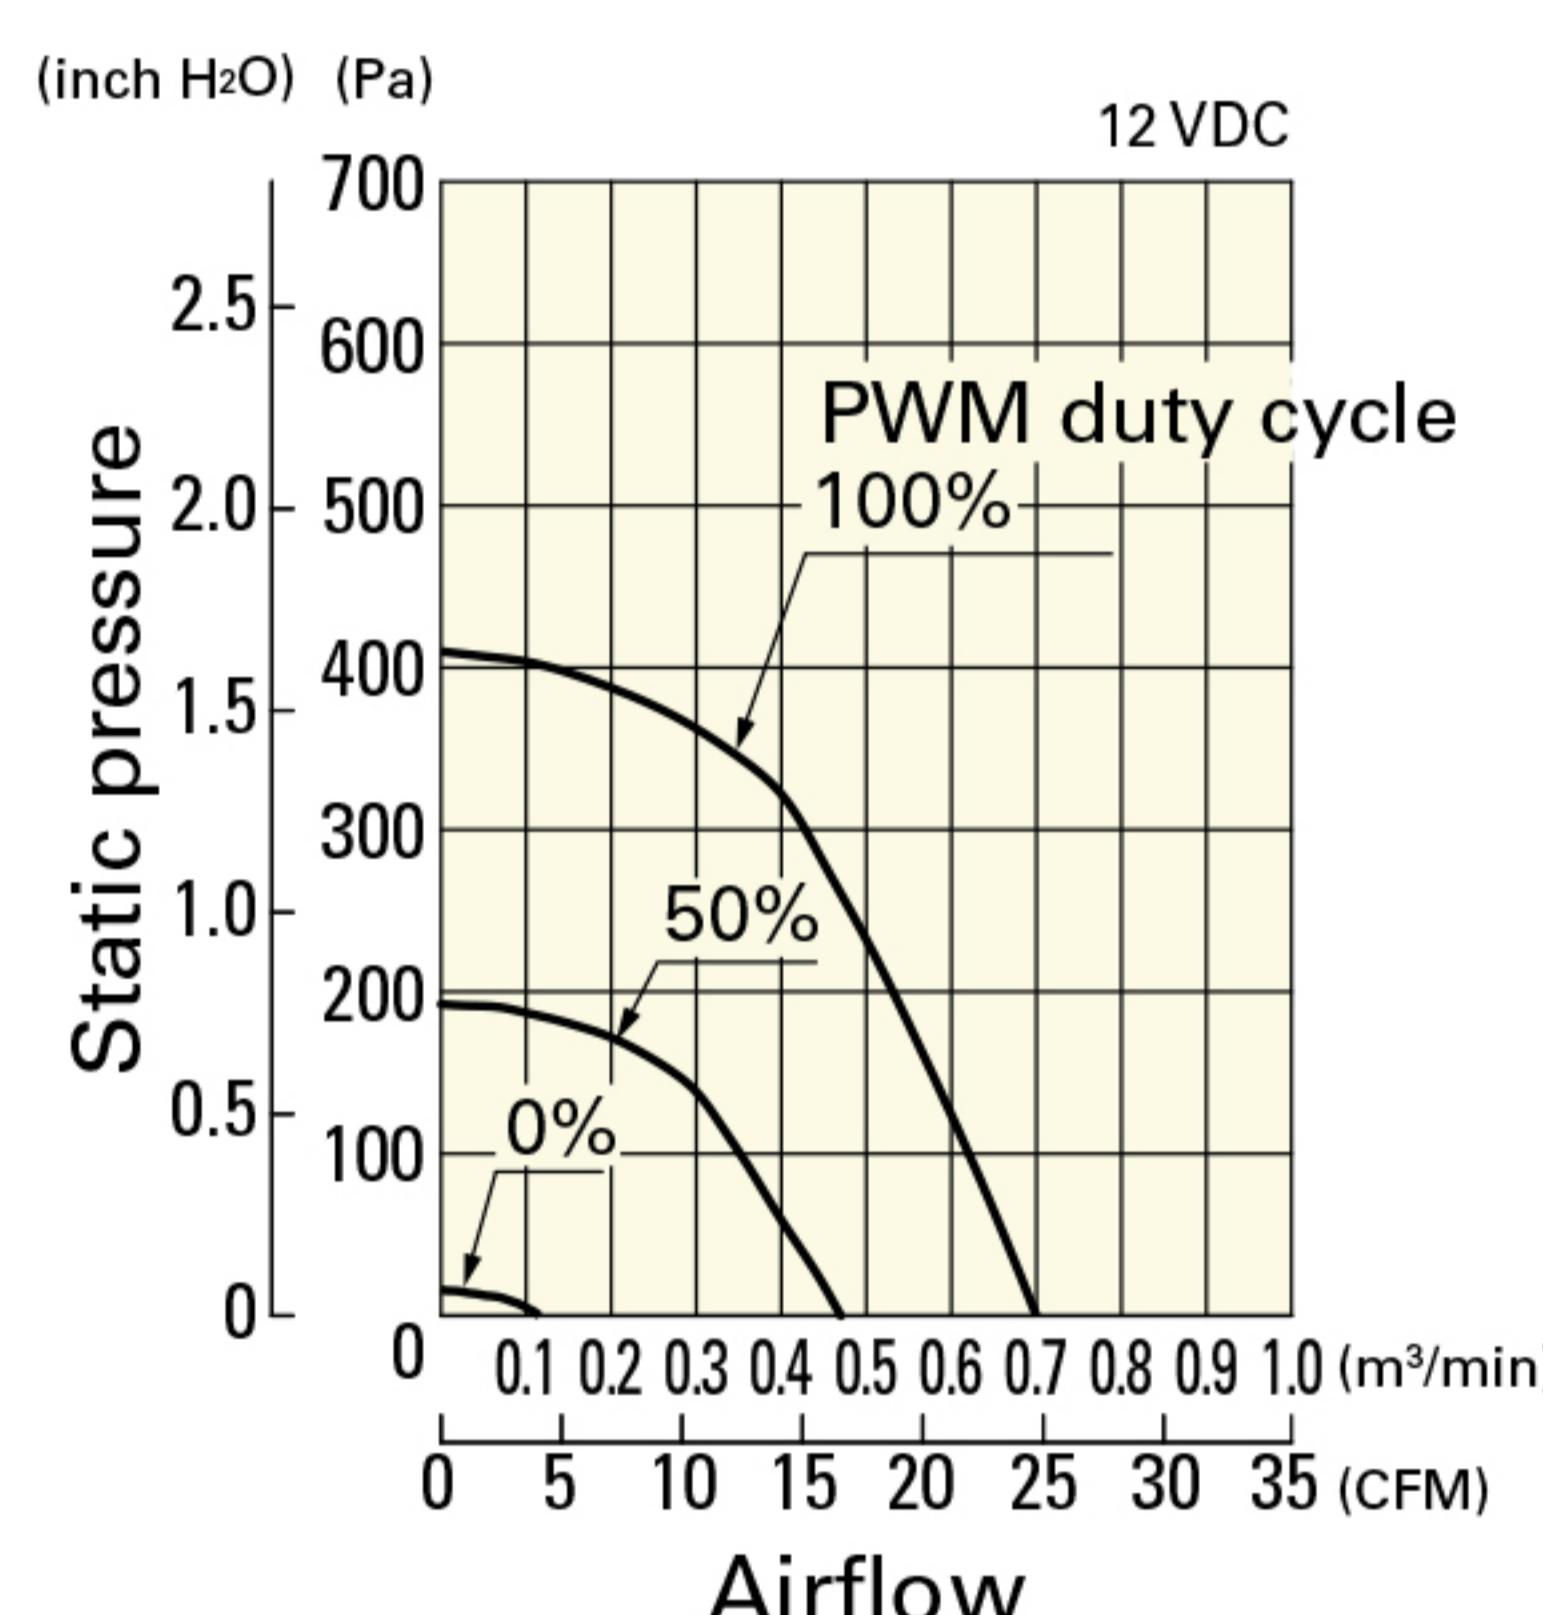

Operating voltage range

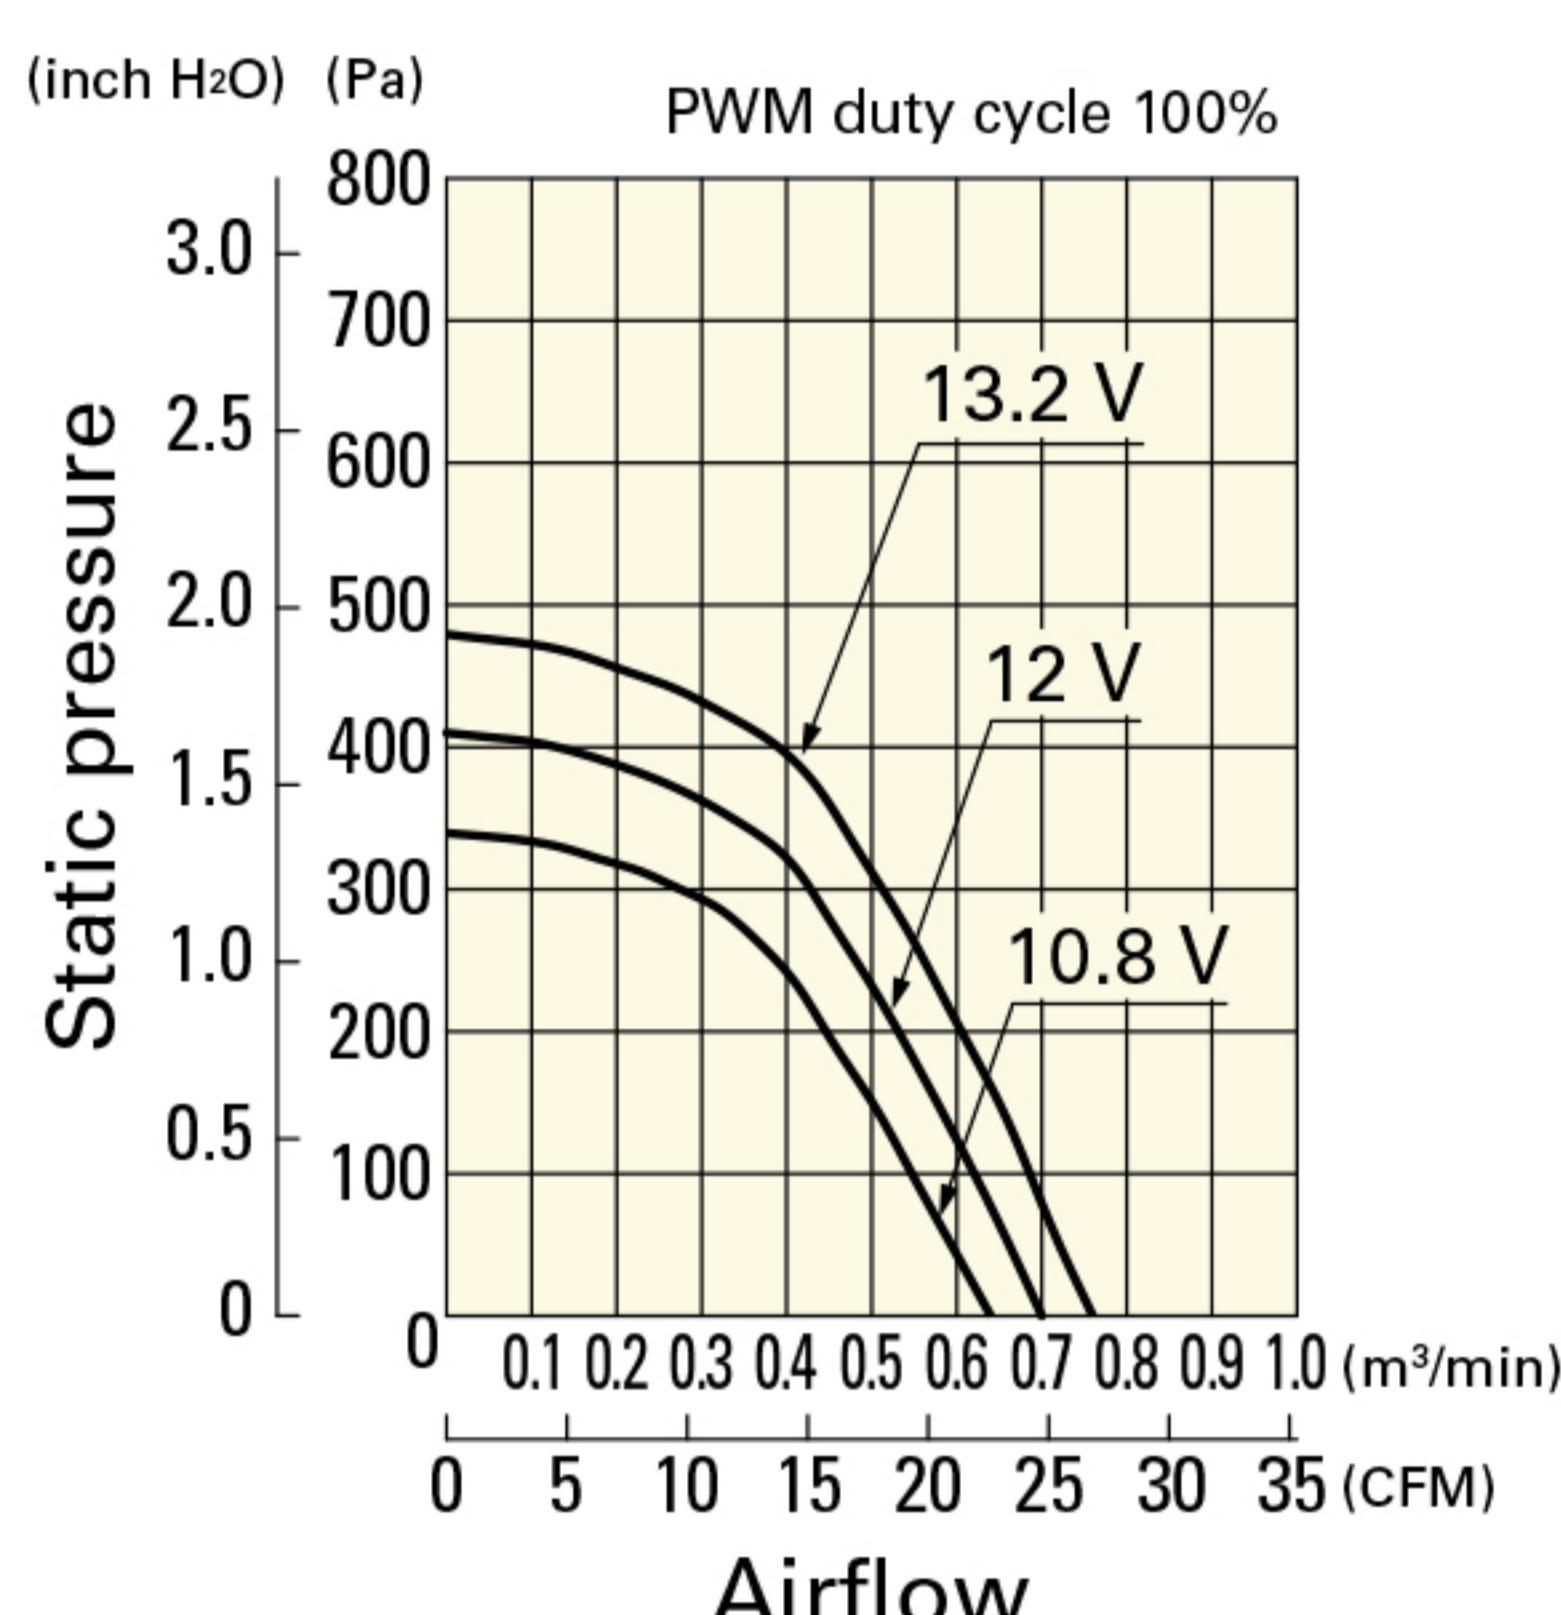


PWM duty - Speed characteristics example

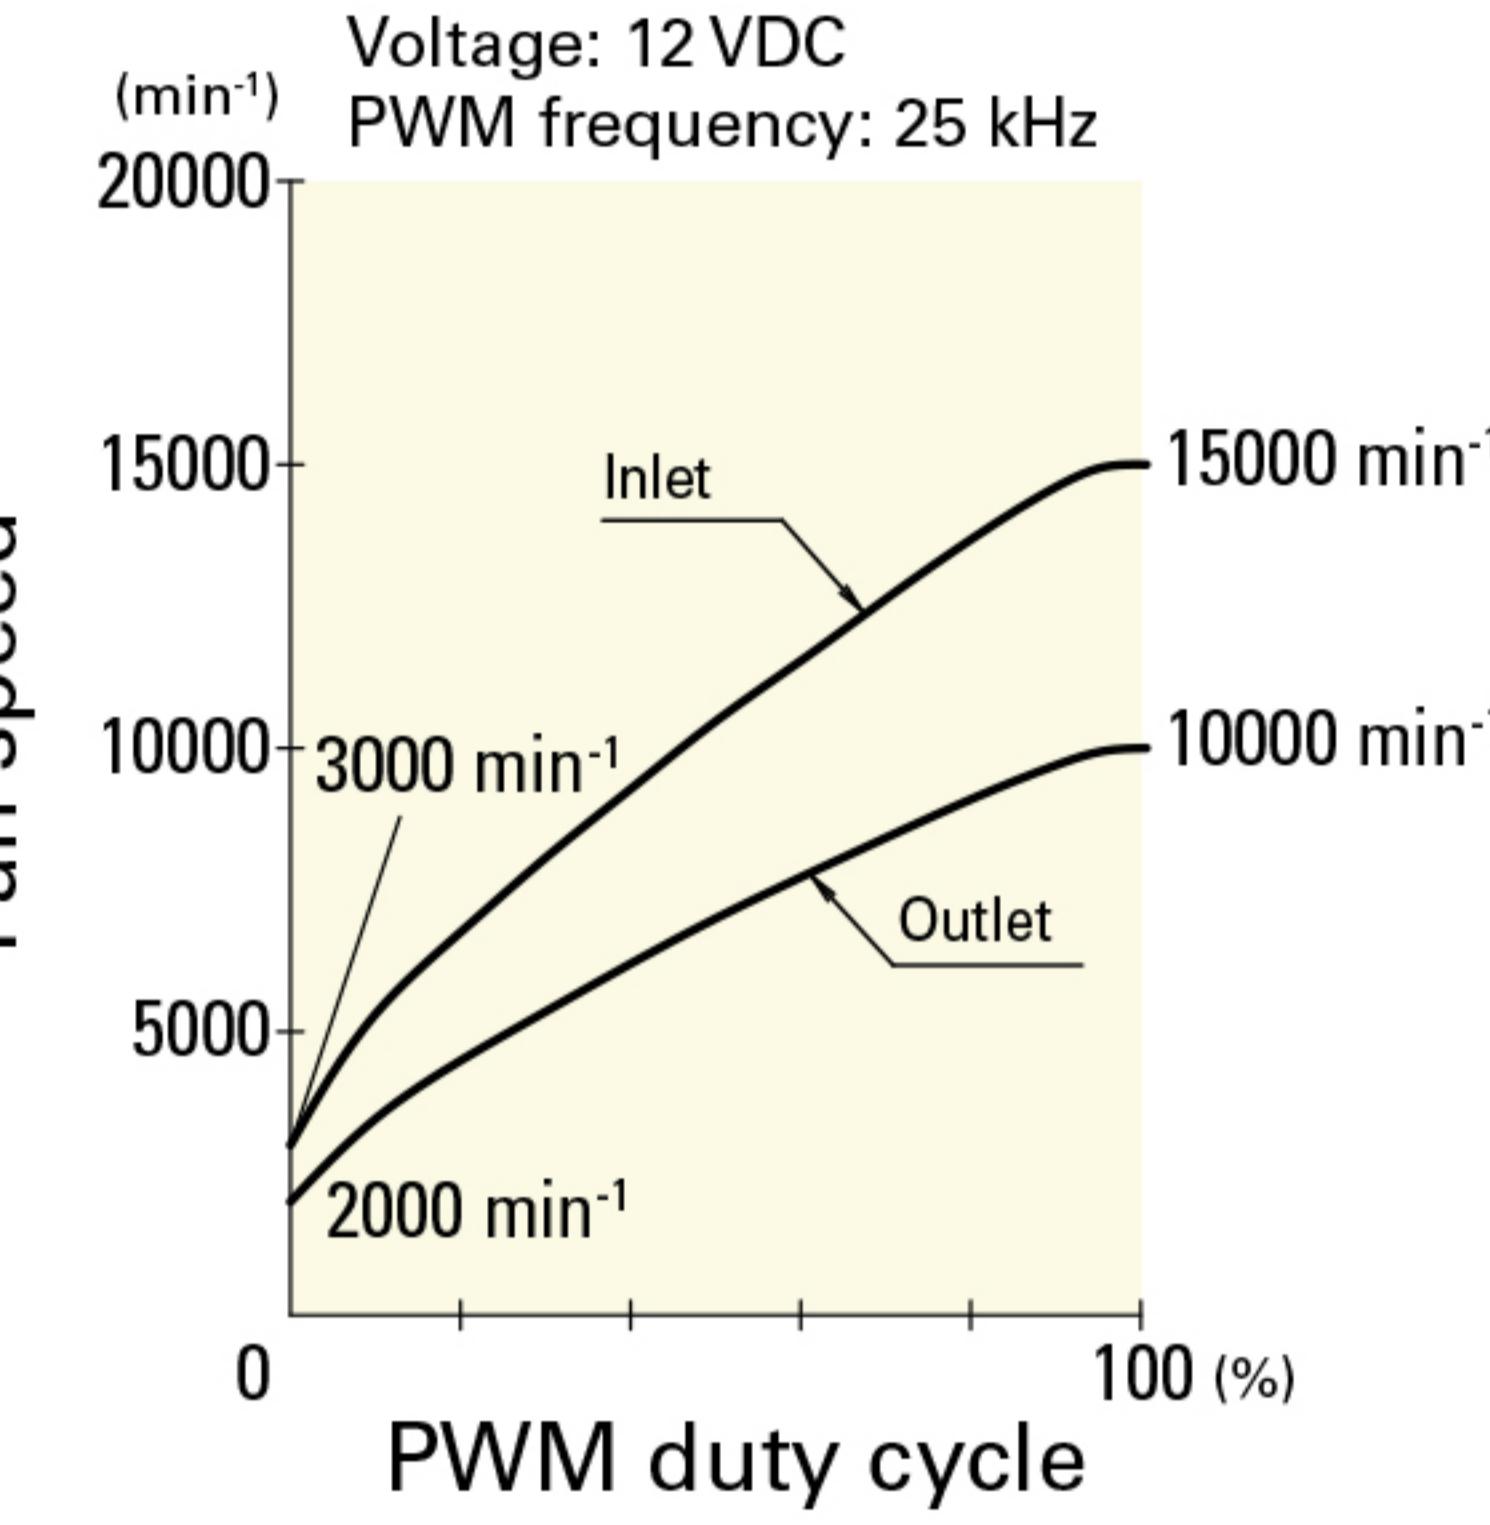


9CRD0412P5M03 With pulse sensor with PWM control function


PWM duty cycle

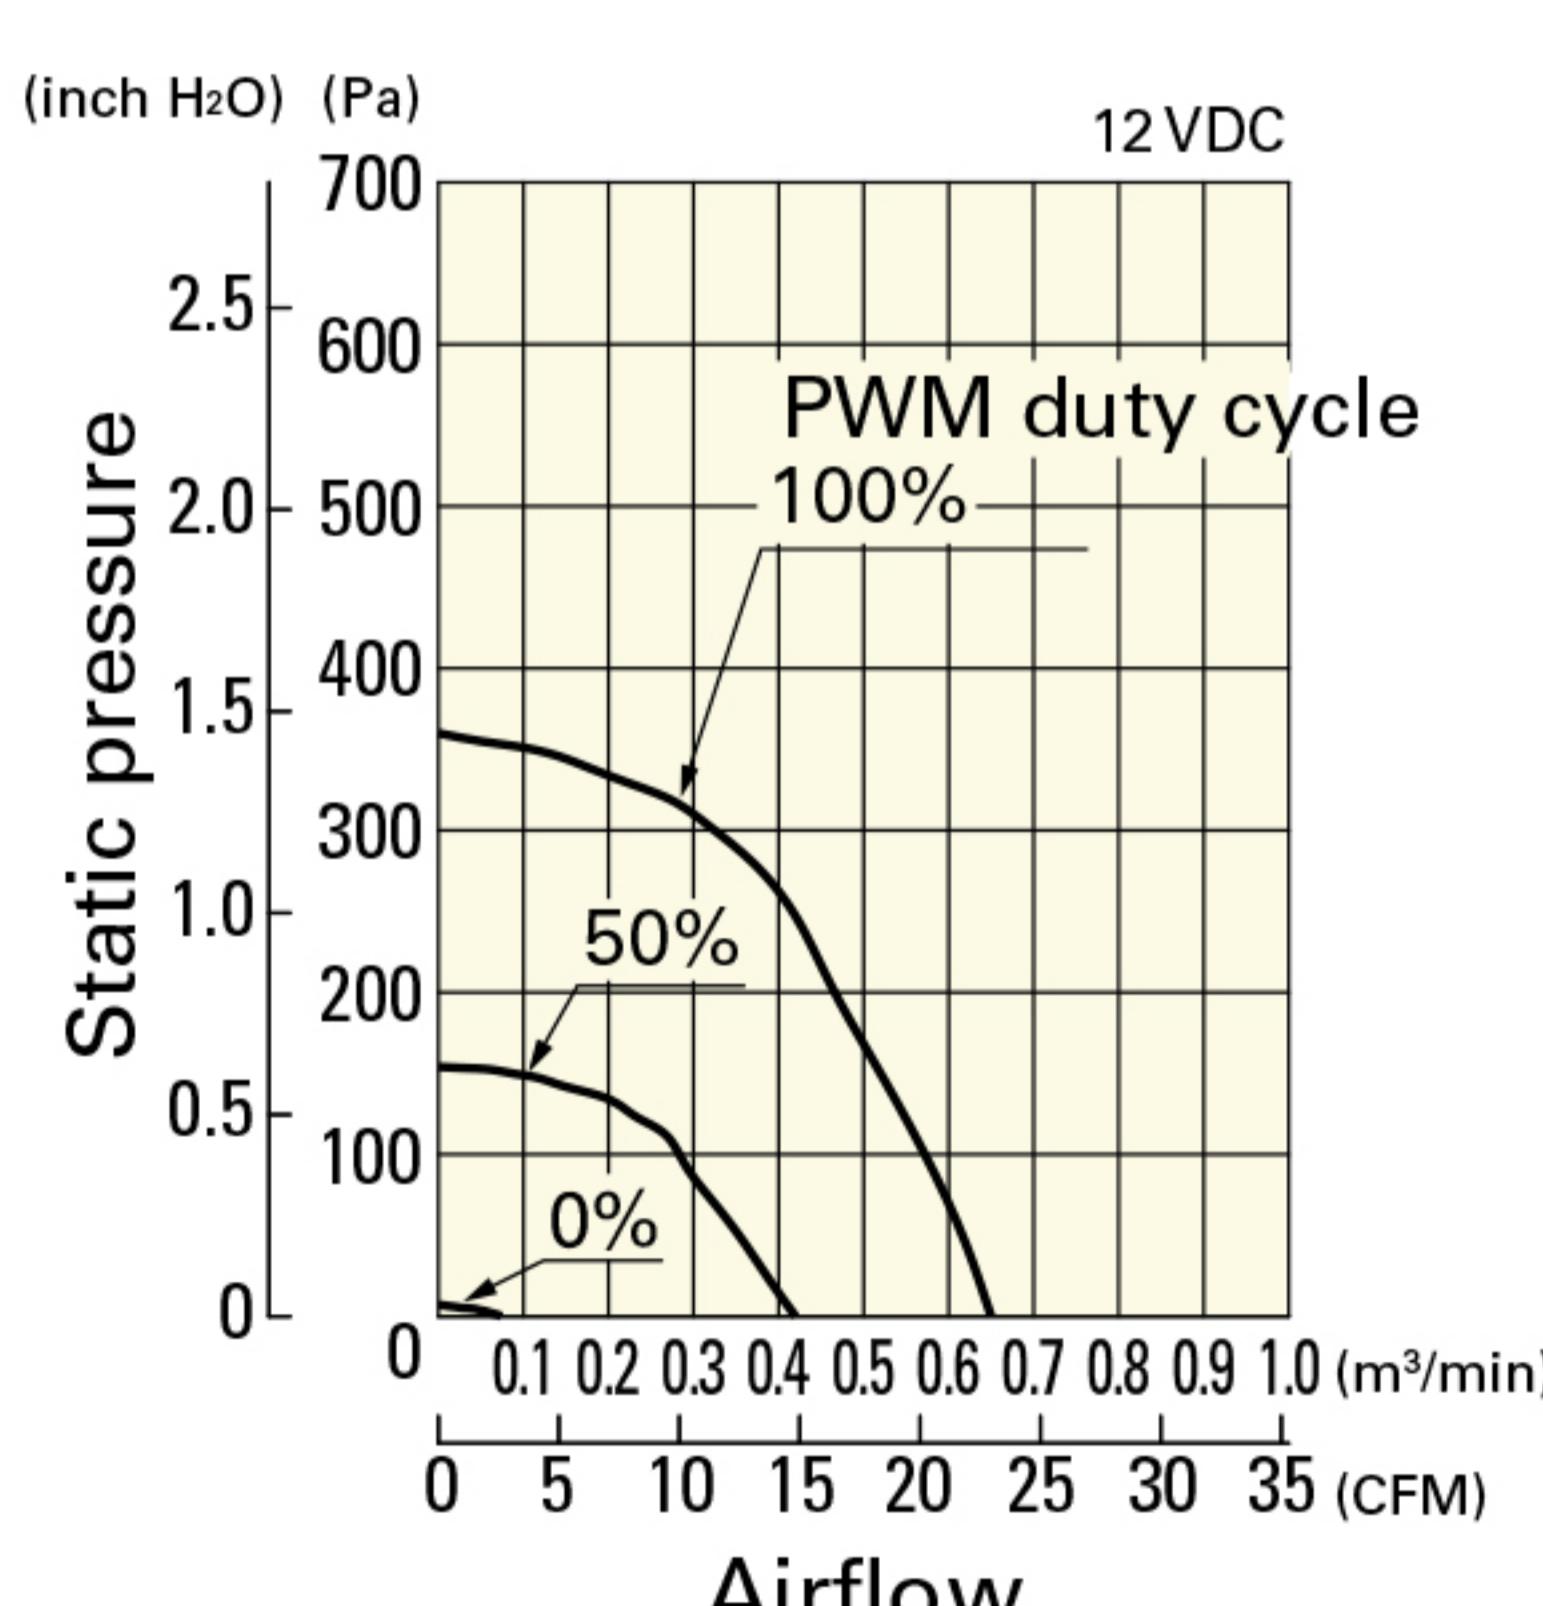

Operating voltage range

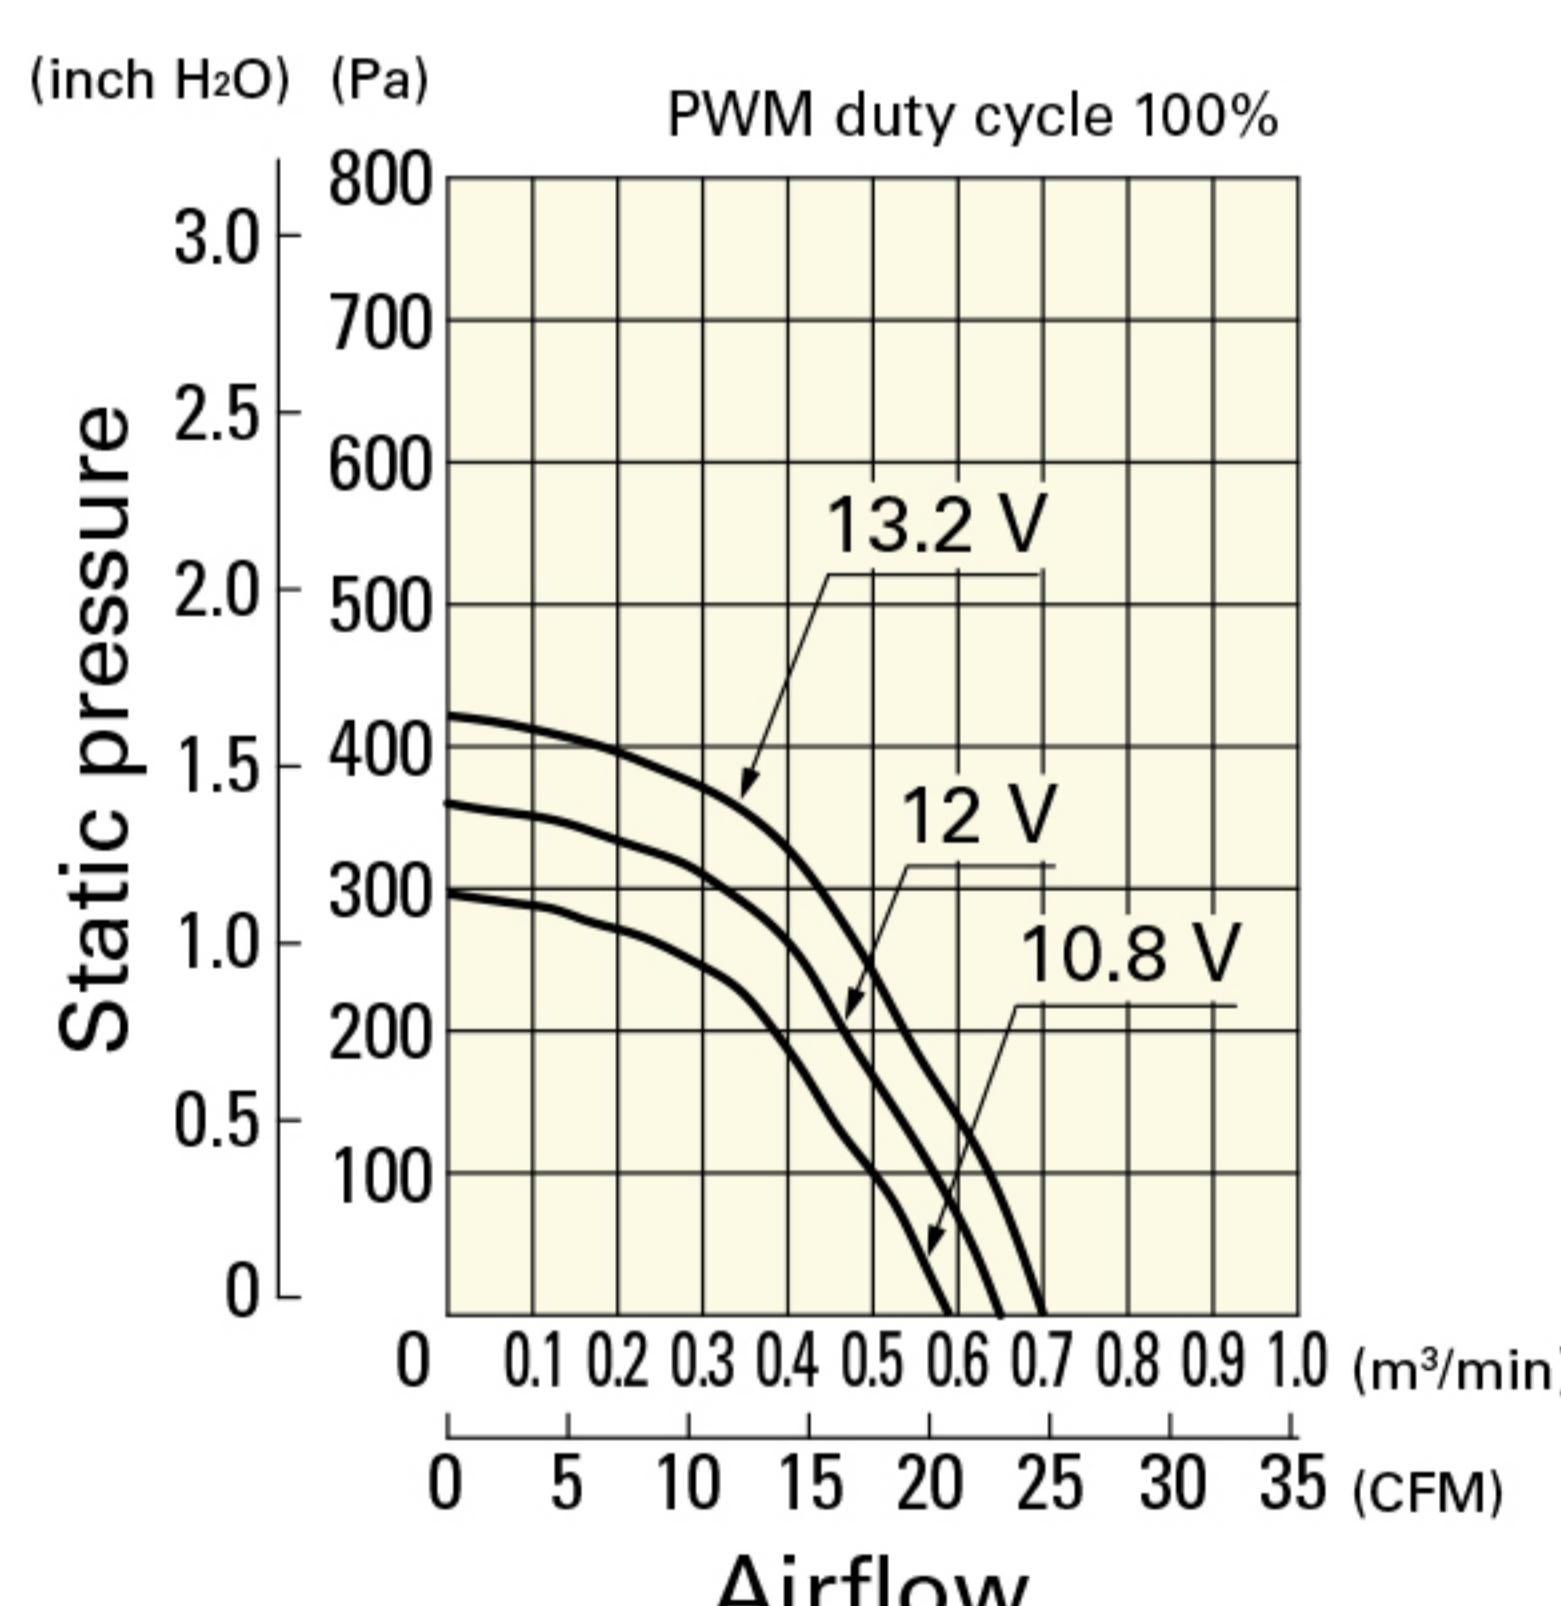


PWM duty - Speed characteristics example

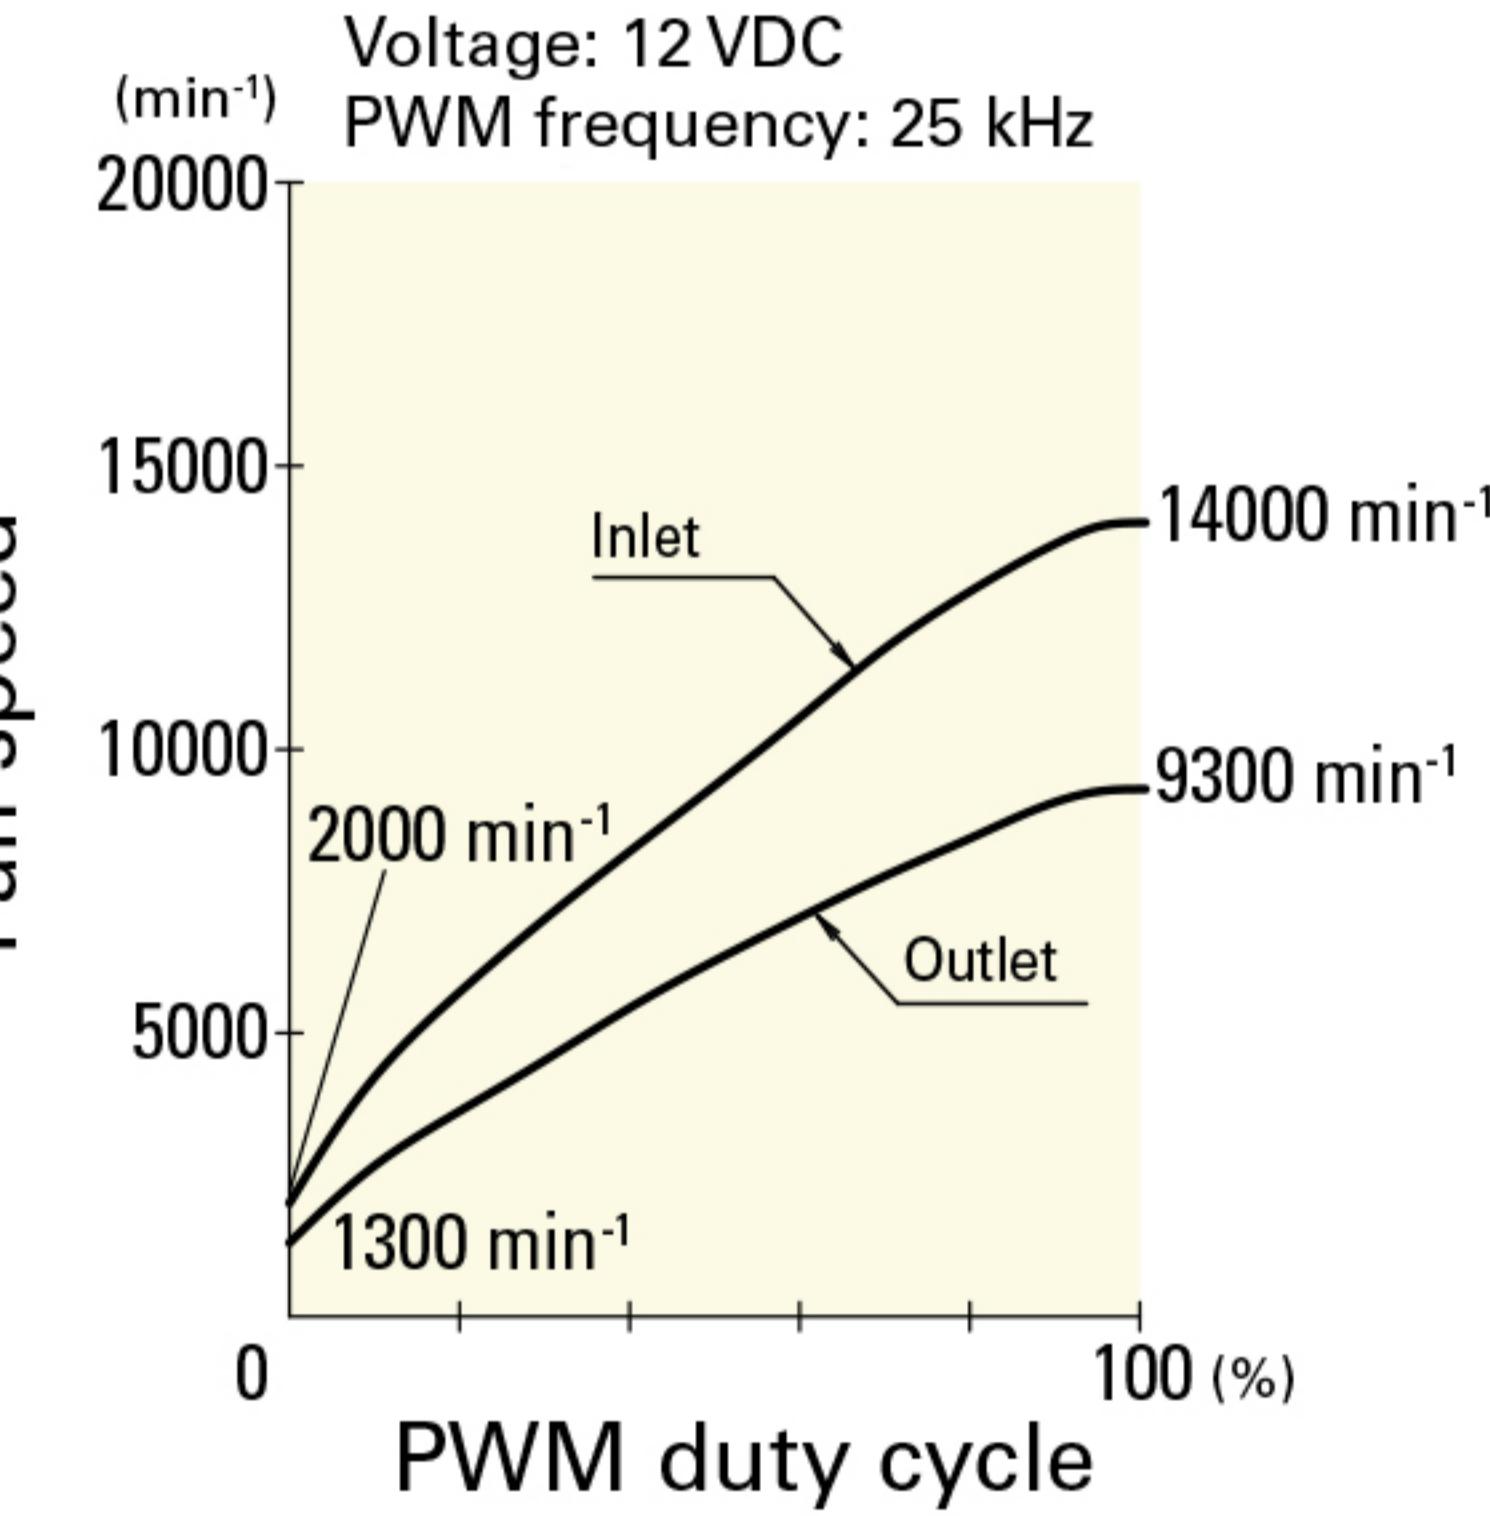

Dimensions (unit: mm)

Inlet side

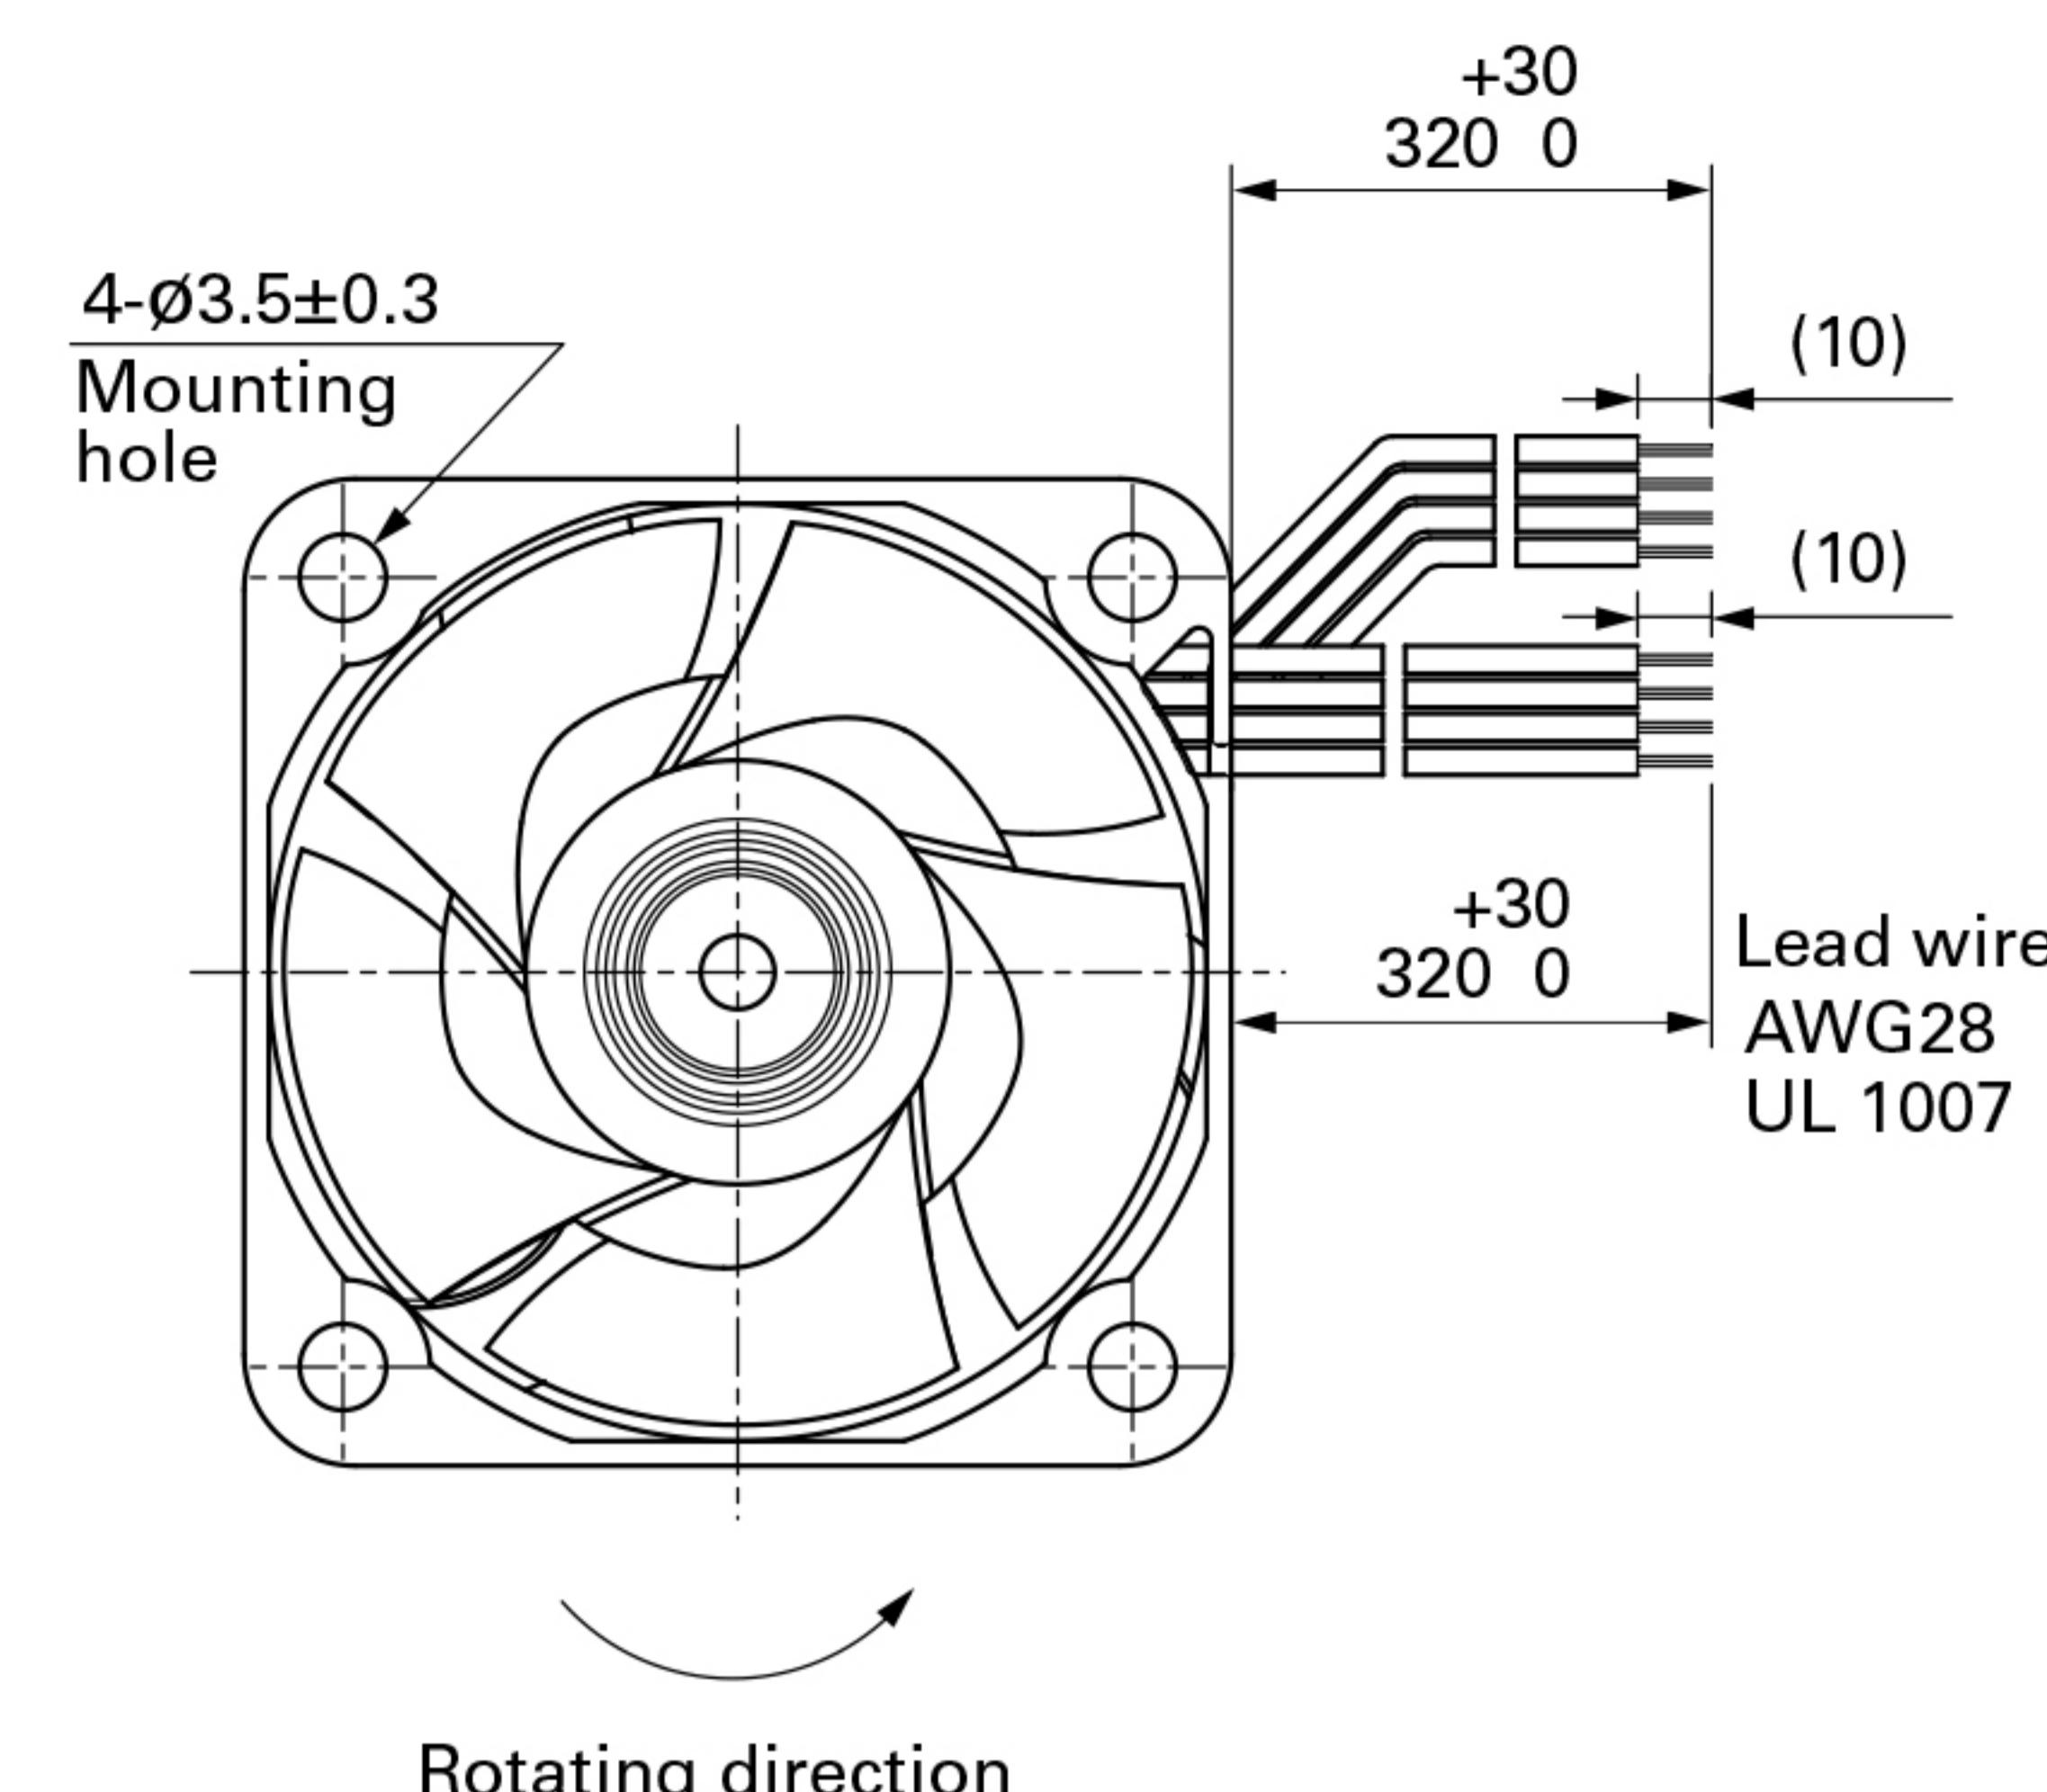


56±0.5

(5)

(5)


Lead wire
AWG28
UL 1007

Outlet side

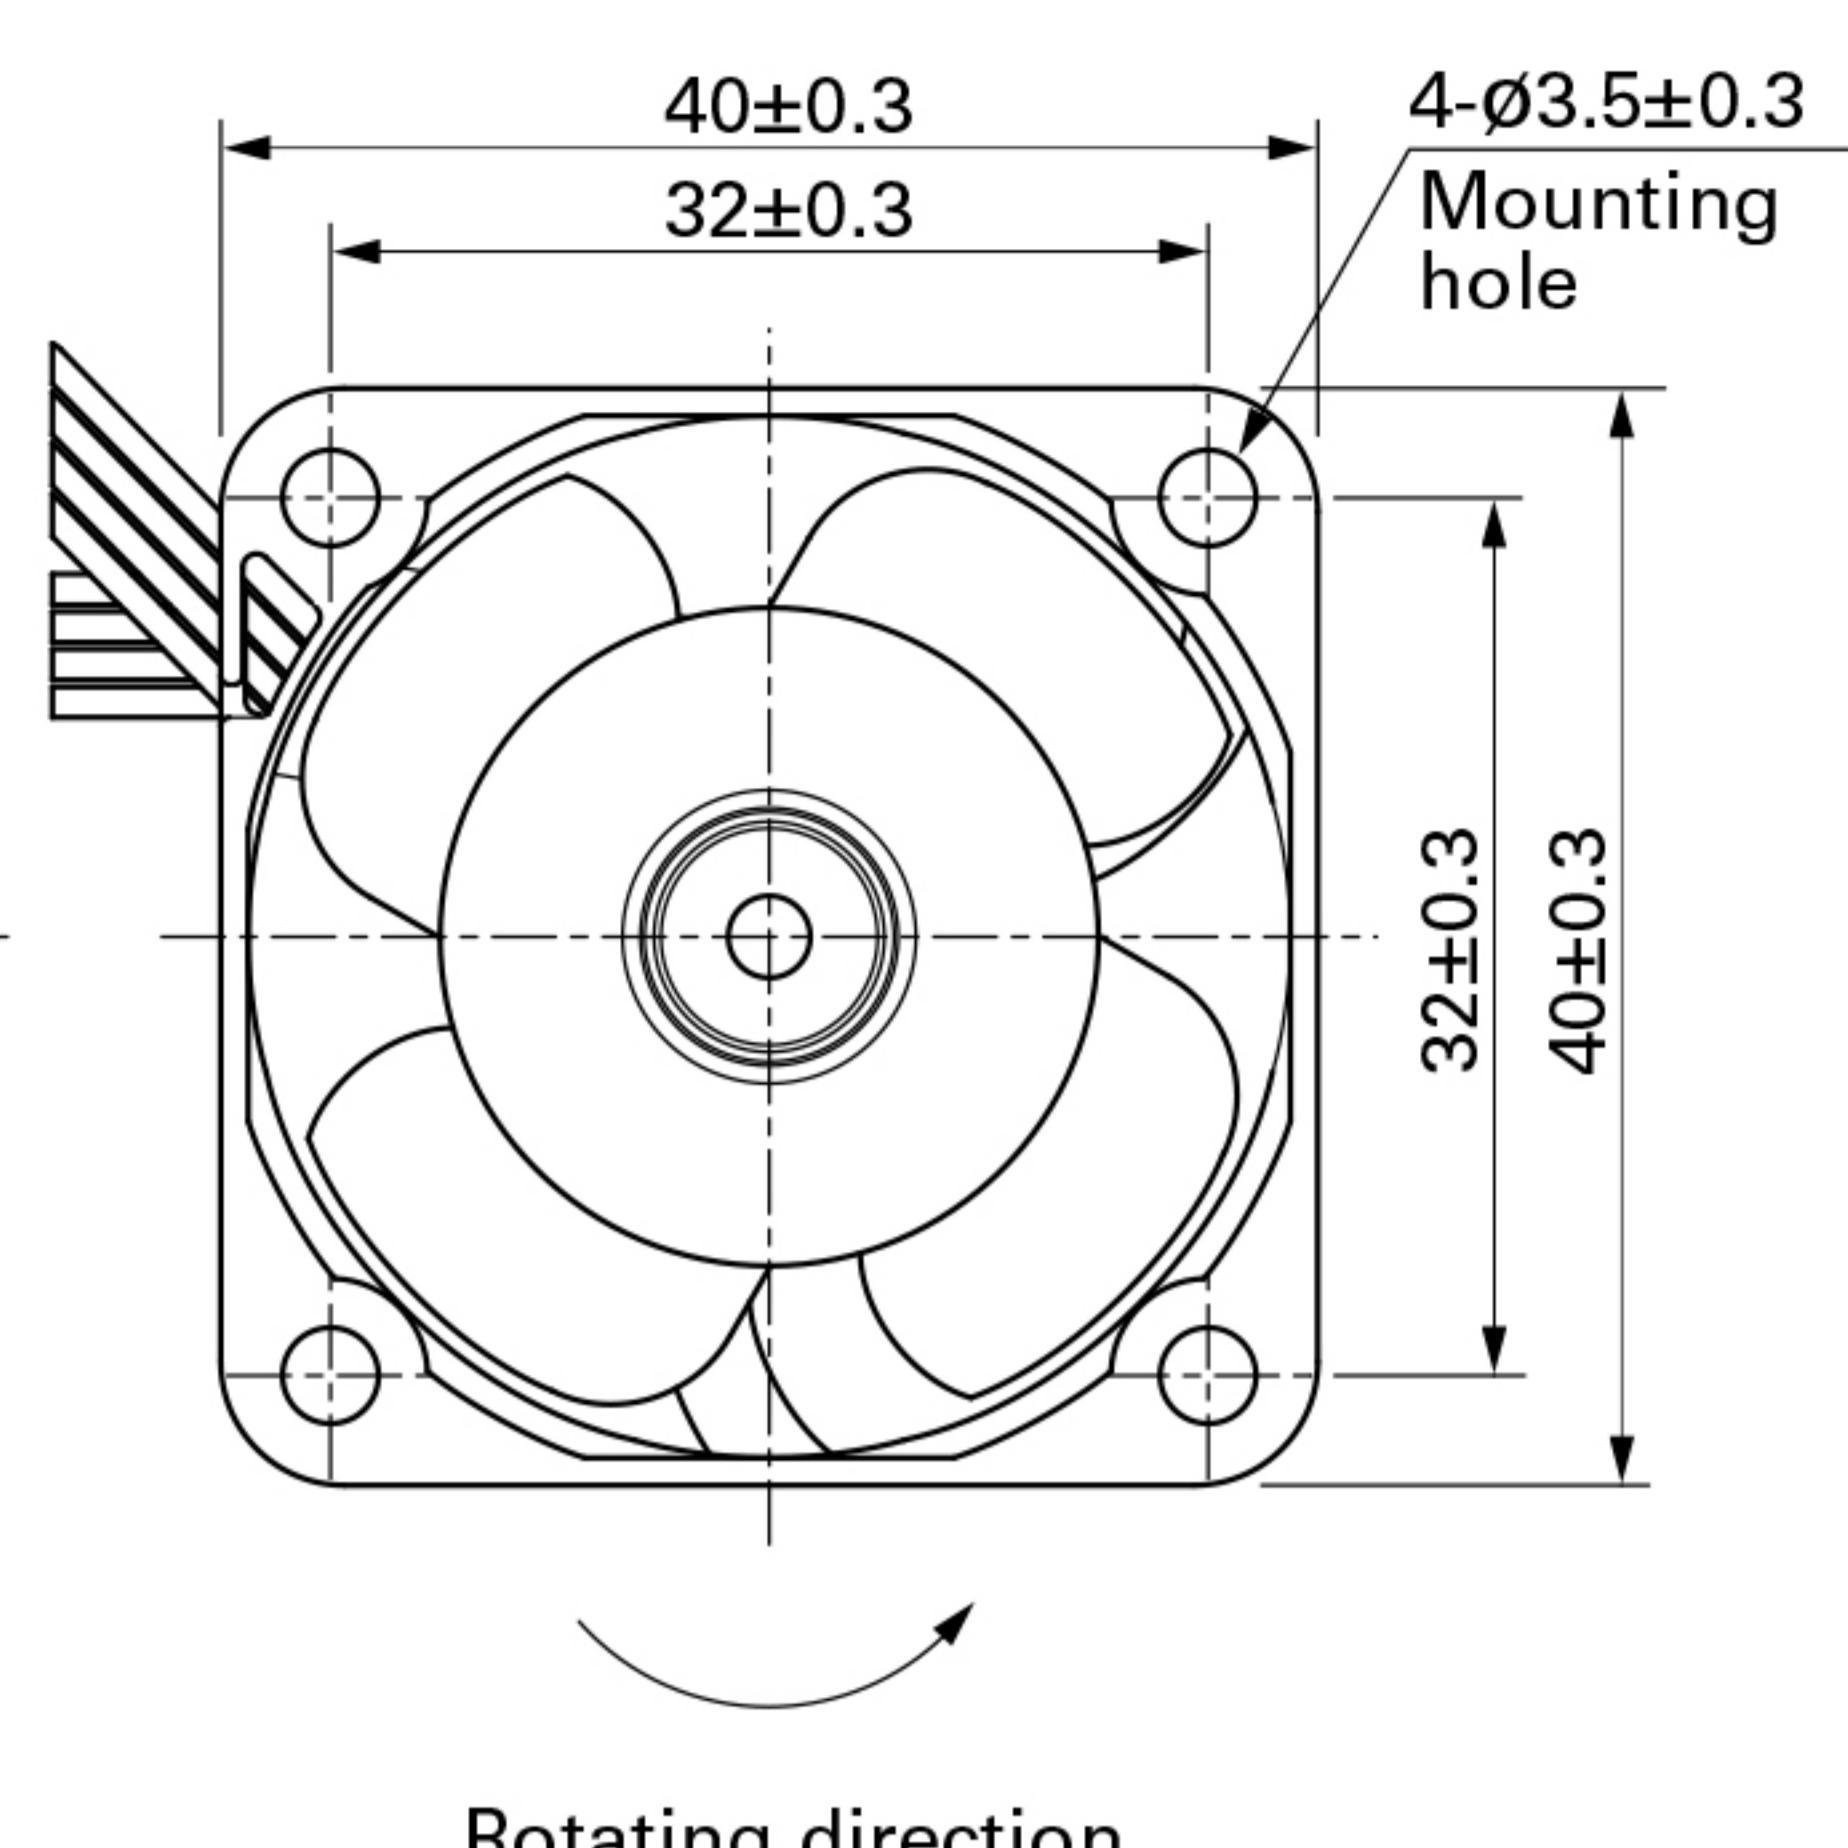

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

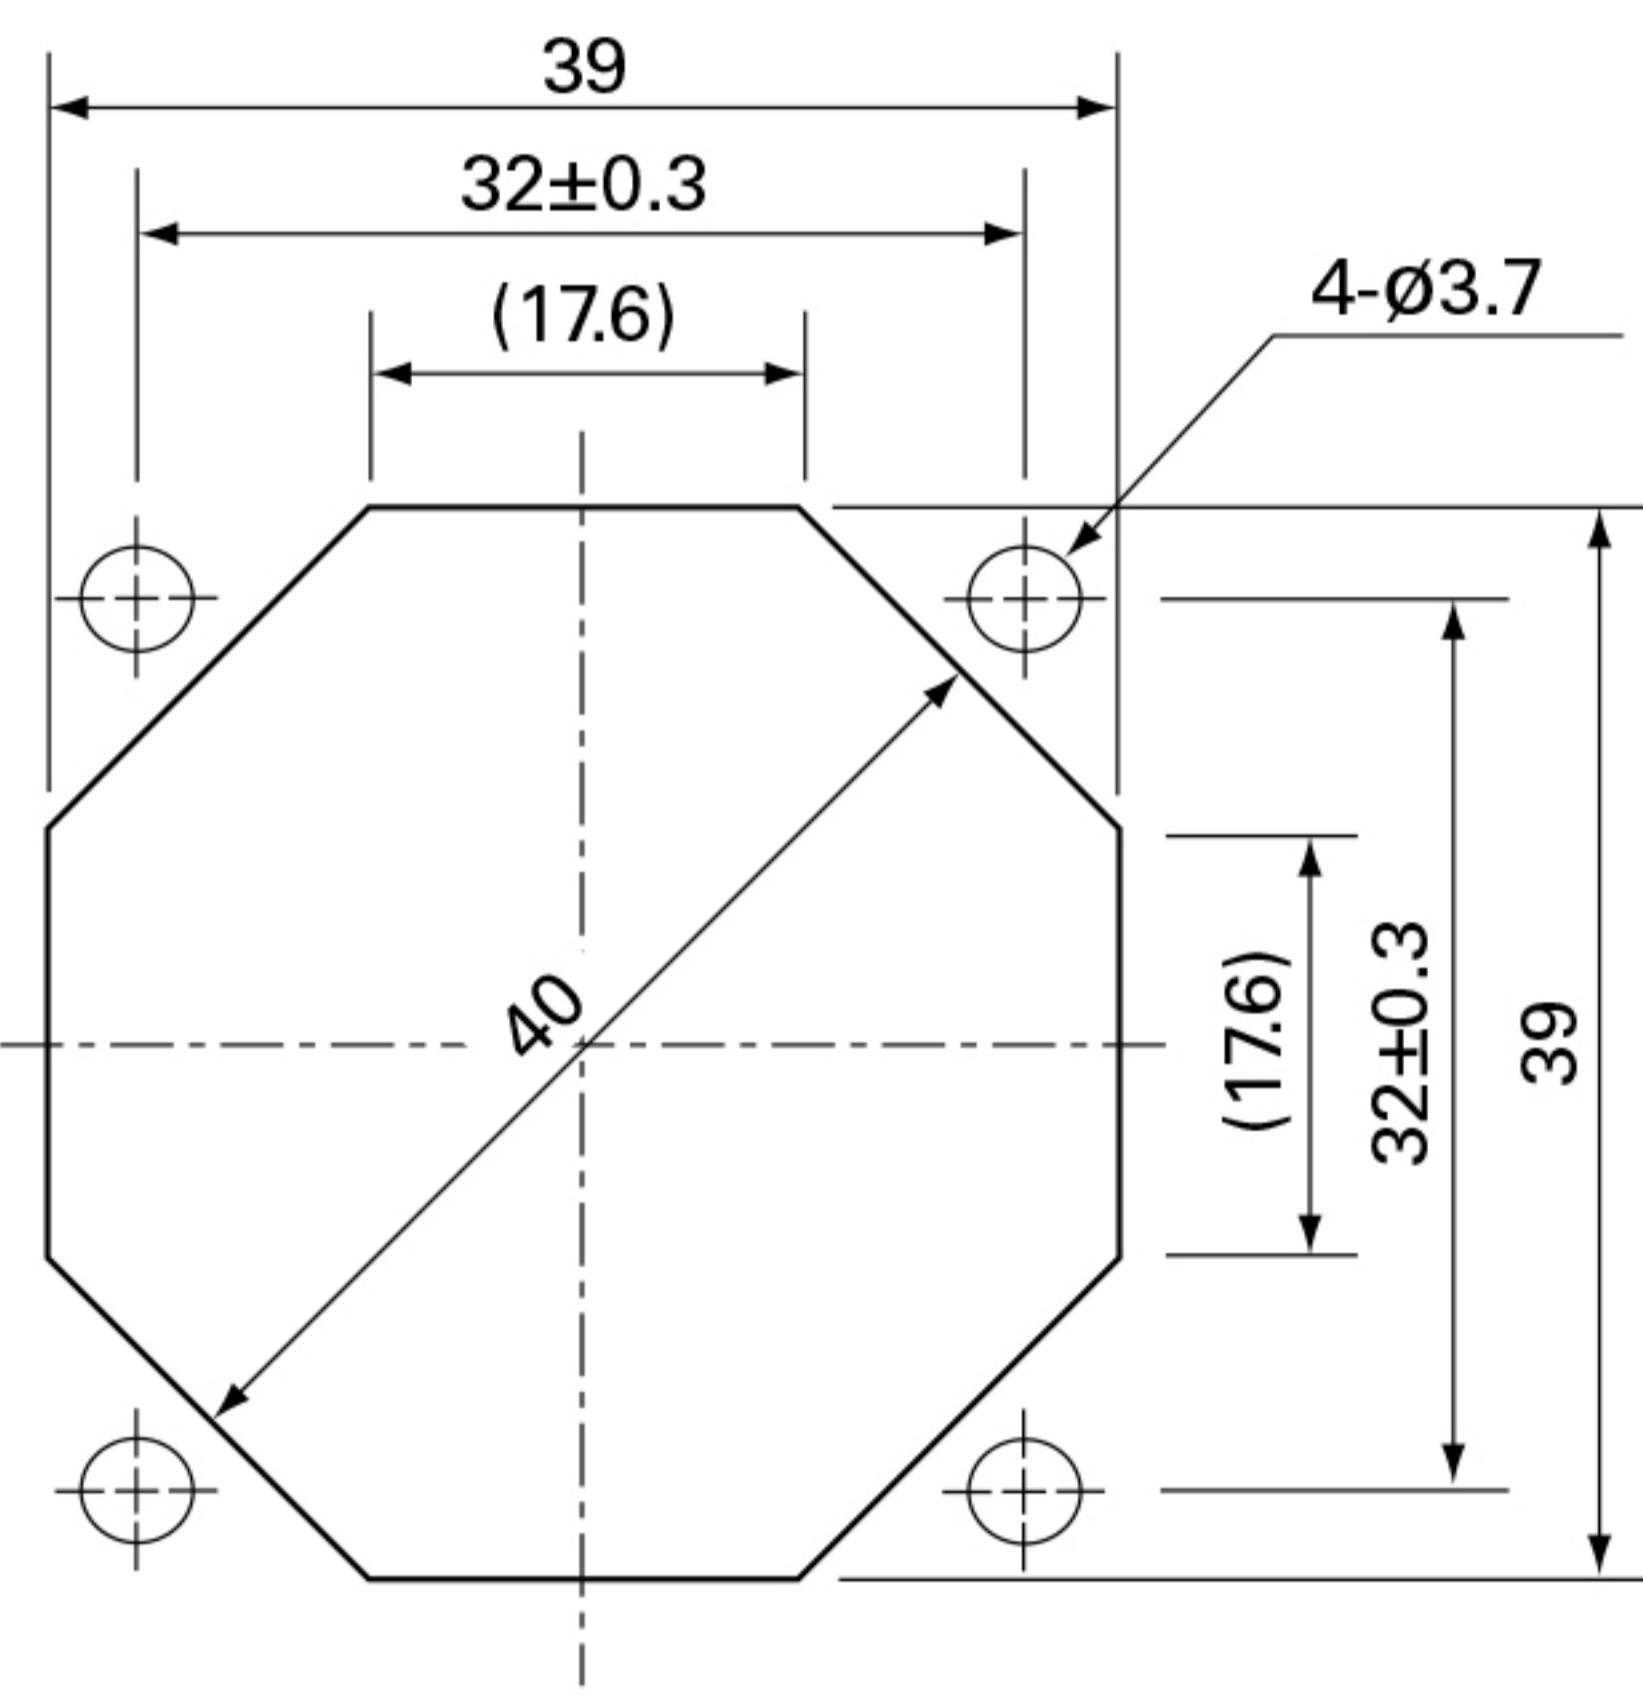

Options

Finger guards

page: p. 532

Model no.: 109-059, 109-059H