

Data sheet | Item number: 762-3000

Web Panel; 10.9 cm (4.3"); 480 x 272 pixels; 2 x USB, 2 x ETHERNET

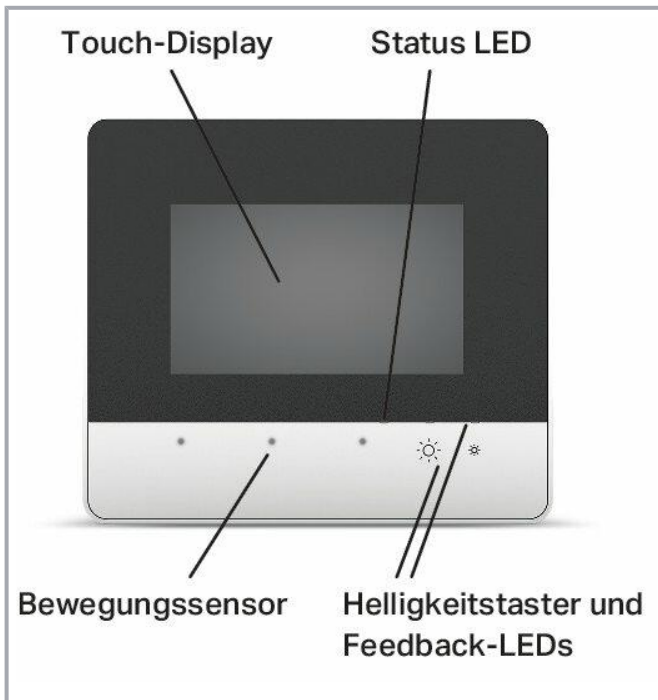
www.wago.com/762-3000



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Successor model**

Item no.762-4101

Touch Panel 600; 10.9 cm (4.3"); 480 x 272 pixels; 2 x USB, 2 x ETHERNET; Web Panel

www.wago.com/762-4101**Item description**

Specifically configured as a Web browser, the Web Panel directly connects to controllers with their own Webservers.

The *e!COCKPIT* (CODESYS 3) or CODESYS 2.3 Web visualization has been specifically optimized for the Web Panel.

Data**Technical data**

Display diagonal	10.9 cm (4.3 inches)
Display	Resistive touchscreen
Display colors	16 million colors
Graphics resolution	(480 x 272) px
Contrast ratio	600:1
Viewing angle (horizontal/vertical)	80° / 80°
Brightness	500 cd/m ²
HBT (Half Brightness Time)	50,000 h
Visualization	Web-Visu Web Visu

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

ETHERNET protocols	DHCP DNS FTP FTPS HTTP HTTPS SSH
Communication	Web browser (CODESYS2) Web browser (CODESYS2)
Operating system	Linux [®]
Processor	ARM [®] Cortex™ A8 600 MHz
Main memory (RAM)	512 MB
Internal memory (flash)	1024 MB
Type of memory card	microSD (max. 2 GB); microSDHC (max. 32 GB)
Baud rate	ETHERNET: 10/100 Mbit/s
Indicators	Three-color LED (red, green, blue)
Controls	Resistive touch panel; 2 capacitive keys; proximity sensor
Supply voltage	24 VSELV DC (18 ... 31.2 V); with reverse voltage protection
Input current (max.) (24 V)	170 mA
Operating power	4.0 W (max.)

Connection data

Connection technology: communication/fieldbus	Modbus TCP: 2 x RJ-45; USB: 2 x USB 2.0 host (type A)
---	---

Physical data

Width	155 mm / 6.102 inches
Height	135 mm / 5.315 inches
Depth	58 mm / 2.283 inches
Panel cutout (W x H)	(140 x 120) mm

Mechanical data

Weight	728 g
Front panel	Plastic, polyester film
Housing material	Anodized aluminum
Conformity marking	CE

Subject to changes. Please also observe the further product documentation!

Environmental requirements



Ambient temperature (operation)	0 ... +55 °C
Surrounding air temperature (storage)	-20 ... +80 °C
Protection type	IP65
Note on protection type	IP65 (front side); IP20 (rear side), per EN 60529
Relative humidity (without condensation)	90 %
Mounting type	Clamping elements (included) or VESA mount (4 x M4x8)
Fire load	0.003 MJ

Commercial data



eCl@ss 10.0	19-20-01-03
eCl@ss 9.0	19-20-01-03
ETIM 8.0	EC001414
ETIM 7.0	EC001414
PU (SPU)	1 Stück
Packaging type	box
Country of origin VKOrg Germany	DE
GTIN	4055143356510
Customs tariff number VKOrg Germany	84714100000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087 /19
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP- REM-W43- WBP762

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNVGL-CG-339,Nov.2016	TAA00001FS
	PRS	-	TE/2190


Subject to changes. Please also observe the further product documentation!



Polski Rejestr Statków

/880590/18

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Compatible products

Mounting

Mounting accessories

Item no.: 762-9001 e!DISPLAY7300T ; Clamping elements (4 pieces)	www.wago.com/762-9001
---	--

Memory card

Memory card

Item no.: 758-879/000-3102 Memory Card SD Micro; 2 GByte	www.wago.com/758-879/000-3102
Item no.: 758-879/000-3108 Memory Card SD Micro; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C	www.wago.com/758-879/000-3108

Downloads

Documentation

Manual

e!DISPLAY 7300T, Web Panel WP 4.3 480x272 PIO 1	V 1.1.0	pdf 2.2 MB	Download
--	---------	---------------	----------

Bid Text

762-3000 X81 - Datei	2019 年2月19日	xml 5.2 kB	Download
762-3000 doc - Datei	2016 年1月8日	doc 29.2 kB	Download

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

System Description

Overview on WAGO-I/O-SYSTEM 750 approvals		pdf 789.0 kB	Download
---	--	-----------------	----------

Touch Panel 600, system description		pdf 151.9 kB	Download
-------------------------------------	--	-----------------	----------

Runtime Software

Firmware

0762-300x, e!DISPLAY 7300T	V 04	zip	Download
WAGO_FW0762-300x_V010204_IX04_I	2021 年10月19日	99.5 MB	

CAD/CAE-Data

CAD data

2D/3D Models 762-3000		URL	Download
-----------------------	--	-----	----------

CAE data

EPLAN Data Portal 762-3000		URL	Download
----------------------------	--	-----	----------

WSCAD Universe 762-3000		URL	Download
-------------------------	--	-----	----------

ZUKEN Portal 762-3000		URL	Download
-----------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 762-3000		URL	Download
Web Panel; 10.9 cm (4.3"); 480 x 272 pixels; 2 x USB, 2 x ETHERNET			

Subject to changes. Please also observe the further product documentation!



Installation Notes

Product family

DISPLAY 7300T

Show all products from the family

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.