


Liger

PC/104 Embedded Computer

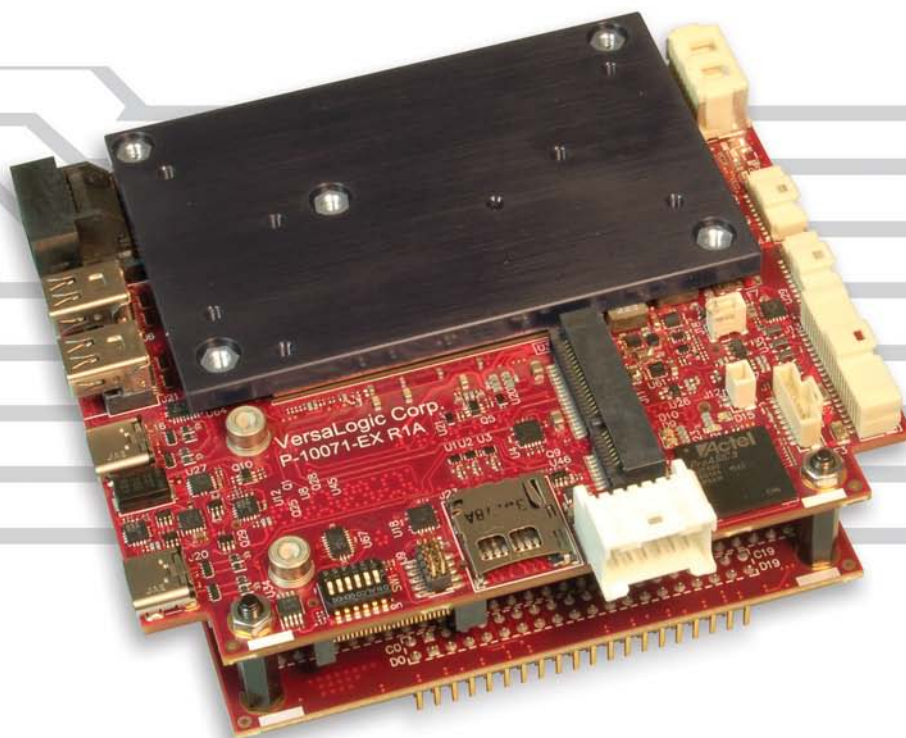

Overview

The Liger is a high-performance computer which combines Intel's 7th Generation Core "Kaby Lake" processor, with a traditional PC/104-*Plus* expansion interface. This combination makes it easy to upgrade existing systems to a powerful 7th generation Kaby Lake Core processor, while preserving plug-in expansion to existing specialty I/O boards. In addition, the Liger also contains a full complement of on-board I/O interfaces, including USB 3.0, USB 2.0, mini PCIe expansion socket, TPM chip, multiple serial interfaces, and 8-bits of digital I/O.

The Liger is available with an embedded i7, i5, or i3 Kaby Lake processor, providing standard clock rates up to 2.8 GHz and Turbo Boost rates to 3.9 GHz. The Kaby Lake processors feature dual-core CPUs and Hyper-Threading logic allowing up to 4 simultaneous threads to be executed.

As with all VersaLogic products, the Liger is designed to support OEM applications where high reliability and long-term availability are required. Liger is backed by a five-year warranty, 5+ year off-the-shelf availability guarantee, and expert US-based technical support. From application design-in support, to its 10+ year extended life programs, the Liger provides a durable embedded computer solution with an excellent cost of ownership.


Highlights

- 7th Generation Intel® Core™ processor ("Kaby Lake") Dual-core
- PC/104-*Plus* expansion site (ISA + PCI)
- TPM (Trusted Platform Module) security chip
- Intel Active Management Technology
- -40° to +85°C Operating Temperature models
- Shock and vibration per MIL-STD-202G
- Up to 16 GB RAM
- Dual Gigabit Ethernet
- DisplayPort video outputs
- Mini PCIe Socket, with mSATA support
- USB 3.0 and 2.0 ports
- Serial I/O (RS-232/422/485)
- Digital I/O
- VersaAPI software support
- x86 operating systems (Windows, Linux, etc.)

Features

- 1 Intel “Kaby Lake” Processor**
Up to 2.8 GHz clock rate, dual-core.
- 2 Trusted Platform Module**
(not shown; on back side)
On-board TPM security chip can lock out unauthorized hardware and software access.
- 3 High-performance Video**
Integrated Intel HD Graphics 620 core supports DirectX 12, OpenGL 4.4, and H.264, MPEG-2 encoding/decoding. Dual Mini DisplayPort outputs (DP++). DisplayPort supports HD audio output.
- 4 Network**
Dual Gigabit Ethernet (GbE) with remote boot support.
- 5 SATA**
6 Gb/s SATA port. Supports rotating or solid state SATA drives.
- 6 Mini PCIe Card Socket**
Supports Wi-Fi modems, GPS receivers, flash data storage with auto-detect mSATA flash storage support, and other mini PCIe modules.
- 7 MicroSD Socket**
Supports removable microSD card solid-state drives.
- 8 Industrial I/O**
(8a) Two USB 3.0 and four USB 2.0 ports support keyboard, mouse, and other devices.
(8b) Dual RS-232/422/485 and Dual RS-232 ports, three 8254 timer/counters, and I2C support.
- 9 Digital I/O**
Eight 3.3V digital I/O lines.
- 10 SPI Interface**
Supports SPI and SPX devices, including low cost analog and digital modules.
- 11 Power Input**
5V Input
- 12 PC/104-Plus Expansion** *(on back side)*
Legacy PCI and ISA connectors, stack-down

- Fanless Operation**
No moving parts required for CPU cooling in most configurations.
- Memory** *(on back side)*
Up to 16 GB DDR3L memory.
- Industrial Temperature Operation**
-40° to +85°C versions available for harsh environments.
- MIL-STD-202G**
Qualified for high shock and vibration environments.
- Software Support**
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, Linux, and VxWorks..

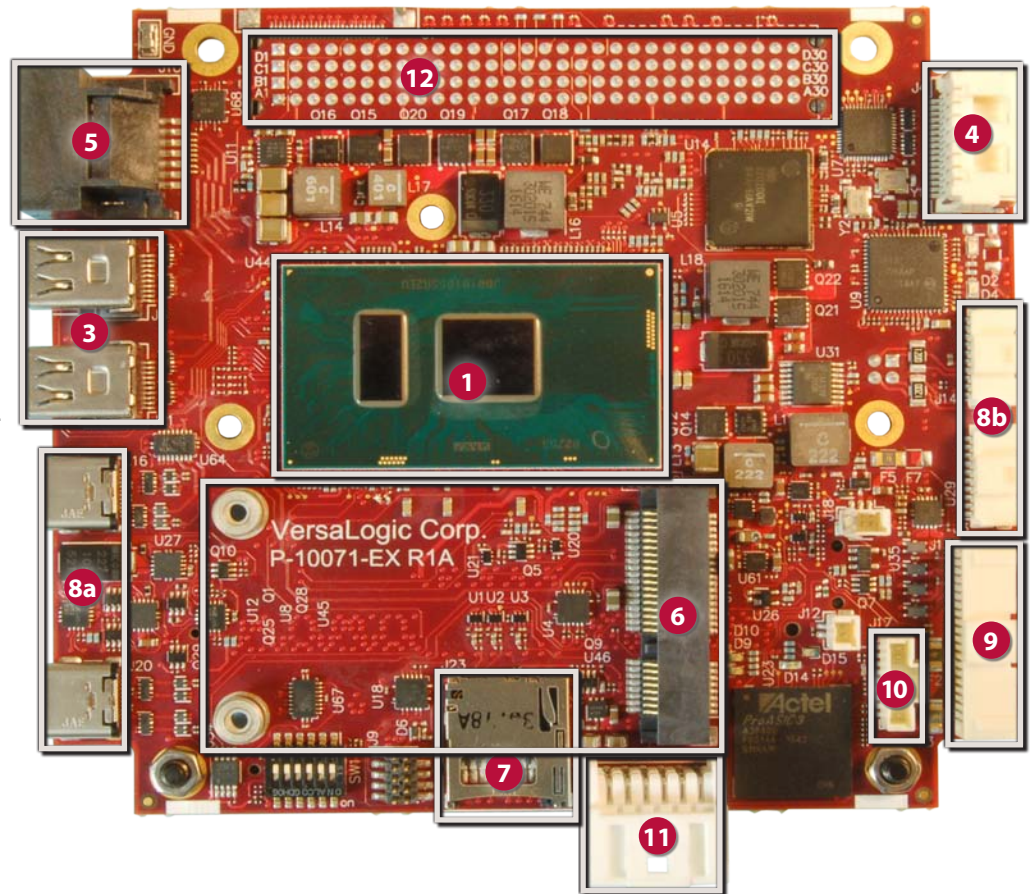

Modify Liger to Your Exact Requirements

COT's modifications are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Labeling
- Custom Screening
- Custom Cabling
- BGA Underfill
- Application-Specific Testing
- Connector & I/O Changes
- BIOS Modifications
- And more –
- Custom Testing
- Software and Drivers
- Revision Locks

Specifications

| General | | | | |
|---|--|----------------------------|----------------|-------------|
| Board Size | PC/104 Compliant: 108 x 96 x 42.5 mm (4.23 x 3.77 x 1.67") | | | |
| Weight | 226 grams (8.0 oz) | | | |
| Processor | Intel 7th Generation Core i3-7100U, i5-7300U, or i7-7600U. Dual core. L2 cache. Supports enhanced Intel SpeedStep, Intel 64-bit instructions, Hyper-Threading, AES Instructions, Execute Disable Bit, and Virtualization Technology. | | | |
| Input Voltage | 5.15V +/- 2% | | | |
| RTC Battery | Connector for external 3.0V RTC backup battery. | | | |
| Power Requirements § | <i>Model</i> | <i>Idle</i> | <i>Typical</i> | <i>Max.</i> |
| | VL-EPM-43xAP-00 | 3.6W | 12.0W | 20.4W |
| | VL-EPM-43xAP-04 | 3.6W | 12.0W | 20.4W |
| | VL-EPM-43xBP-00 | 4.0W | 12.5W | 20.9W |
| | VL-EPM-43xBP-04 | 4.0W | 12.5W | 20.9W |
| | VL-EPM-43xCP-00 | 4.1W | 12.5W | 21.9W |
| | VL-EPM-43xCP-04 | 4.1W | 12.5W | 21.9W |
| | VL-EPM-43xCP-08 | 4.1W | 13.3W | 22.4W |
| VL-EPM-43xCP-16 | 4.1W | 13.5W | 22.9W | |
| System Reset & Hardware Monitors | All voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature and fan speed monitoring. Push-button reset and power. | | | |
| Stackable Bus | PC/104-Plus format. Legacy ISA and PCI connectors. | | | |
| Manufacturing Standards | Standard | IPC-A-610 Class 2 modified | | |
| | Special Order | IPC-A-610 Class 3 modified | | |
| Regulatory Compliance | RoHS (EU 2015/863) | | | |

| Environmental | | | | |
|---|---|-------------------------|------------------|------------------------|
| Cooling Options | Bolt-on heat plate standard. Optional Heat sink, Heat sink with fan, heat pipe, and other adaptors available. | | | |
| Operating Temperature ◇ | <i>Model</i> | <i>Heat Plate**</i> | <i>Heat Sink</i> | <i>Heat Sink + Fan</i> |
| | VL-EPM-43E | -40°C to +85°C | -40°C to +85°C | -40°C to +85°C |
| | VL-EPM-43S | 0° to +60°C | 0° to +60°C | 0° to +60°C |
| Ranges shown assume 90% CPU utilization. For detailed thermal information and exceptions, refer to the VL-EPM-43 Reference Manual. **Heat plate must be kept below 90°C | | | | |
| Airflow Requirements | Refer to the VL-EPM-43 Reference Manual for detailed airflow requirements. | | | |
| Storage Temperature | -40° to +85°C | | | |
| Altitude | Operating* | To 4,570m (15,000 ft.) | | |
| | Storage | To 12,000m (40,000 ft.) | | |
| Thermal Shock | 5°C/min. over operating temperature | | | |
| Humidity | Less than 95%, noncondensing | | | |
| Vibration, Sinusoidal Sweep □ | MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis | | | |
| Vibration, Random □ | MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis | | | |
| Mechanical Shock □ | MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis | | | |

§ Represents operation at +25°C and +5V running Windows 7 with on-board, DisplayPort display, SATA, Ethernet, COM, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization.

‡ TVS protected port (enhanced ESD protection)

Power pins are overload protected

◇ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

* For extended altitude information contact VersaLogic Sales

□ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact VersaLogic Sales for further information.

△ RS232 through CPU HSUART ports and Operating System (Windows WINSSD, Linux Minicom compatible). Some applications may require customer developed drivers.

| Security | |
|------------------------------------|--|
| TPM | Trusted Platform Module 2.0 device. |
| Memory | |
| System RAM | Up to 16 GB DDR3L (1.35V) SDRAM. |
| Memory Speed | 1600 MHz |
| Video | |
| General | Integrated high-performance video. HD Graphics 620 core – Gen-9 compute architecture, 24 execution units, and GPU Turbo Boost. Supports 3 independent displays. Supports DirectX 12, OpenGL 4.4, OpenCL 2.0. |
| Hardware Based Acceleration | Decode and Encode of JPEG, MJPEG, MPEG2, AVC, MVC, HEVC 8-bit, VC-1, VP8, VP9. |
| DisplayPort Interface § | Dual Mini DisplayPort outputs supports DP++ and HDMI signaling (Video and Audio outputs). 24-bit. Up to 4096 x 2304 at 60 Hz. Supports Extended Desktop, Clone, and Twin display modes. |

| Mass Storage | |
|---------------------------------------|--|
| Rotating or Solid-State Drives | SATA (Revision 3.0) port. (optional dual SATA available) |
| Flash storage | mSATA modules (SATA signaling, bootable). |
| Flash storage | One microSD socket. Bootable |

| Network Interface | |
|----------------------------|--|
| Ethernet ‡ | Two autodetect 10BaseT/100BaseTX/1000BaseT ports with status LEDs. IEEE 1588 Precision Time Protocol (PTP) compatible. |
| Network Boot Option | Via BIOS extension |
| Remote Management | Intel vPro Active Management Technology (AMT) (i5-7300U and i7-7600U CPUs only). Supports out-of-band management capabilities including Keyboard-Video-Mouse (KVM) Remote Control, alerting, and event logging. Supports remote control, alerting, and event logging. Note: Disabled by default. Enable using BIOS setup option. |

| Device I/O | |
|-------------------------------|--|
| USB # ‡ | Two USB 3.0 host port (Type-C connectors) and four USB 2.0 host ports. |
| COM 1 / 2 Interface ‡ | Two RS-232/422/485 selectable ports. 16C550 compatible. 460 Kbps. |
| COM 3 / 4 Interface ‡△ | Two RS-232 ports. 115 Kbps. |
| Digital I/O | Eight TTL I/O lines (3.3V). Independently configurable. |
| I2C | Single I2C interface |
| Audio | Optional. Use VL-ADR-01 audio interface. |
| Counter/Timers | Three 8254 compatible Programmable Interval Timers (PITs). |

| Other I/O | |
|---------------------------------|---|
| Mini PCIe / mSATA Socket | Full-size Mini PCIe socket with mSATA signaling support. Supports Wi-Fi modems, GPS receivers, solid state mSATA drives, and other plug-in modules. |
| SPI Interface | Supports SPI and SPX devices. Supports up to two SPX modules. |

| Software | |
|--------------------------|--|
| BIOS | Phoenix Technologies UEFI BIOS. Field reprogrammable. Support for USB keyboard/mouse and USB boot. |
| VersaAPI | VersaLogic Application Programming Interface to support on-board I/O devices. |
| Sleep Mode | ACPI 3.0. Support for S3 and S4 suspend states and C1 processor state. |
| Operating Systems | Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX. |

Specifications are subject to change without notification. Intel and Atom are trademarks of Intel Corp. PC/104 and PC/104-Plus are trademarks of the PC/104 Consortium. PCI Express is a registered trademark of PCI-SIG. SATA and mSATA are trademarks of the Serial ATA International Organization. All other trademarks are the property of their respective owners.

Ordering Information

Other configurations are possible. Contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

| Model | Processor | Cores | Memory Size (GB) | Clock Frequency (Normal / Turbo) | Graphics Frequency (Normal / Boost) | vPro Capabilities | Operating Temp. | Cooling |
|-----------------|-----------|-------|------------------|----------------------------------|-------------------------------------|-------------------|-----------------|------------|
| VL-EPM-43EAP-00 | i3-7100U | Dual | 0 | 2.4 GHz / none | 300 MHz / 1.00 GHz | No | -40° to +85°C | Heat plate |
| VL-EPM-43EAP-04 | i3-7100U | Dual | 4 | 2.4 GHz / none | 300 MHz / 1.00 GHz | No | -40° to +85°C | Heat plate |
| VL-EPM-43EBP-00 | i5-7300U | Dual | 0 | 2.6 GHz / 3.5 GHz | 300 MHz / 1.10 GHz | Yes | -40° to +85°C | Heat plate |
| VL-EPM-43EBP-04 | i5-7300U | Dual | 4 | 2.6 GHz / 3.5 GHz | 300 MHz / 1.10 GHz | Yes | -40° to +85°C | Heat plate |
| VL-EPM-43ECP-00 | i7-7600U | Dual | 0 | 2.8 GHz / 3.9 GHz | 300 MHz / 1.15 GHz | Yes | -40° to +85°C | Heat plate |
| VL-EPM-43ECP-04 | i7-7600U | Dual | 4 | 2.8 GHz / 3.9 GHz | 300 MHz / 1.15 GHz | Yes | -40° to +85°C | Heat plate |
| VL-EPM-43ECP-08 | i7-7600U | Dual | 8 | 2.8 GHz / 3.9 GHz | 300 MHz / 1.15 GHz | Yes | -40° to +85°C | Heat plate |
| VL-EPM-43SAP-00 | i3-7100U | Dual | 0 | 2.4 GHz / none | 300 MHz / 1.00 GHz | No | 0° to +60°C | Heat plate |
| VL-EPM-43SAP-04 | i3-7100U | Dual | 4 | 2.4 GHz / none | 300 MHz / 1.00 GHz | No | 0° to +60°C | Heat plate |
| VL-EPM-43SBP-00 | i5-7300U | Dual | 0 | 2.6 GHz / 3.5 GHz | 300 MHz / 1.10 GHz | Yes | 0° to +60°C | Heat plate |
| VL-EPM-43SBP-04 | i5-7300U | Dual | 4 | 2.6 GHz / 3.5 GHz | 300 MHz / 1.10 GHz | Yes | 0° to +60°C | Heat plate |
| VL-EPM-43SCP-00 | i7-7600U | Dual | 0 | 2.8 GHz / 3.9 GHz | 300 MHz / 1.15 GHz | Yes | 0° to +60°C | Heat plate |
| VL-EPM-43SCP-08 | i7-7600U | Dual | 8 | 2.8 GHz / 3.9 GHz | 300 MHz / 1.15 GHz | Yes | 0° to +60°C | Heat plate |

Accessories

| Part Number | Description |
|---|--|
| Cable Kit | |
| VL-CKR-LION | Development Cable kit for EPM-43. Includes: VL-4005, 0702, 1014, 1205, 1604, 2402, 2032, HDW-401, and 105. |
| VL-CBR-4005 | I/O Cable Assembly, Cable & Paddle Board |
| VL-CBR-0702 | SATA cable, 20" |
| VL-CBR-1014 | 1 mm 10-pin Pico-Clasp to two DB-9 Cable, 12" |
| VL-CBR-1205 | 12-pin Micro-clasp to ATX 5V power adapter cable 7" |
| VL-CBR-1604 | Dual Ethernet cable – rugged latching, 12" |
| VL-CBR-2402 | USB 3.0 Type-C to Type-A plug cable |
| VL-CBR-2032 | miniDisplayPort to 15-pin VGA adapter 6" (Commercial Temperature) |
| VL-HDW-105 | Standoff package (metric thread) 0.6" |
| VL-HDW-401 | Thermal compound paste. For attaching heat plates and sinks |
| Thermal Options | |
| VL-HDW-406 | Passive Heat Sink to mount on product heat plate. |
| VL-HDW-413 | Heat Sink + Cooling fan assembly to mount on product heat plate. |
| VL-HDW-408 | Heat Pipe system to mount on product heat plate. |
| Cables | |
| VL-CBR-0203 | 2-pin Latching Battery Module, 6" |
| VL-CBR-0901 | 9-pin Pico-Clasp to Dual SPX cable, 8" |
| VL-CBR-2031 | miniDisplayPort to miniDisplayPort, 0.5 m |
| VL-CBR-2033 | miniDisplayPort to HDMI Active Adapter, 6" (Commercial Temperature) |
| Memory | |
| VL-MM9-xxEBN | DDR3 PC3-12800 SO-DIMM memory module (1.35v) (Industrial Temperature) |
| VL-MM9-xxSBN | DDR3 PC3-12800 SO-DIMM memory module (1.35v) (Commercial Temperature) |
| Audio | |
| VL-ADR-01S | USB to Audio Adapter |
| Solid-State Storage (flash memory) | |
| VL-F41-xxxx | microSD card (SDIO), SLC, (Industrial temperature) |
| Hardware | |
| VL-PS-ATX-300A | Bench-top / development power supply |
| VL-HDW-106 | 0.6" standoffs, English thread (four per kit) |
| VL-HDW-108 | Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm |
| VL-HDW-112 | PC104 (ISA) Spacer |
| VL-HDW-113 | PC104 (PCI) Spacer |
| VL-HDW-115 | PC104 (blank) Spacer |
| Miscellaneous | |
| VL-HDW-111 | Half to Full Size Mini PCIe Adapter kit. Metal adapter and screws (2) |
| VL-HDW-203 | PC/104 extractor tool (metal) |

Expansion Modules

| Part Number | Description | Form Factor |
|---|--|-------------|
| Network | | |
| VL-MPEe-E4E | Gigabit Ethernet over Fiber adapter | Mini PCIe |
| VL-MPEe-E3E | Gigabit Ethernet adapter | Mini PCIe |
| VL-MPEe-FW1E | 1394 Firewire Module, (Industrial Temperature) | Mini PCIe |
| Serial I/O | | |
| VL-MPEu-U2E | Quad serial plus twelve GPIOs | Mini PCIe |
| Analog & Digital I/O | | |
| VL-MPEe-A1E | Analog input (12-bit resolution) | Mini PCIe |
| VL-MPEe-A2E | Analog input (16-bit resolution) | Mini PCIe |
| VL-SPX-1 | Analog Input Module 8-Channels | SPX |
| VL-SPX-2 | Digital I/O Module 16-lines | SPX |
| VL-SPX-4 | Analog Output Module 4-channels 12-bit | SPX |
| VL-SPX-5 | Solid State Switch Module 8-channel | SPX |
| GPS | | |
| VL-MPEu-G2E | GPS receiver | Mini PCIe |
| VL-MPEu-G3E | Advanced GPS receiver | Mini PCIe |
| Video | | |
| VL-EPM-V7E | Video Expansion Module: VGA and LVDS | PC/104-Plus |
| VL-MPEe-V5E | VGA and LVDS Interface | Mini PCIe |
| Solid-State Storage (flash memory) | | |
| VL-MPEs-F1Exx | mSATA module (4/16/32 GB) (SATA) | Mini PCIe |
| Adapters | | |
| VL-EPM-P2E | PC/104 Mini PCIe socket x2 Adapter | PC/104-Plus |
| VL-MPEs-S3E | SATA adapter | Mini PCIe |

Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, providing expert support during development, or on-time delivery of defect-free products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact VersaLogic today to learn more.

