

NHD-7.0-1024600AF-LSXP

IPS TFT Liquid Crystal Display Module

NHD-	Newhaven Display
7.0-	7.0" Diagonal
1024600-	1024xRGBx600 Pixels
AF-	Model
L-	LVDS Interface
S-	High Brightness, White LED Backlight
X-	TFT
P-	IPS, Wide Temperature

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com



nhsales@newhavendisplay.com

Document Revision History

Revision	Date	Description	Changed by
-	4/22/19	Initial Release	PK
1	6/18/19	Backlight Characteristics Updated	SB
2	7/21/20	Updated 2D Mechanical Drawing; Kapton Tape to Golden Fingers	AS
3	7/27/20	Included Horizontal & Vertical Timing Charts	AS
4	4/27/2021	Updated the Electrical Characteristics	JT

Functions and Features

- 1024xRGBx600 Resolution
- IPS Type, Full Viewing Angles
- LED Backlight
- LVDS Interface
 - 4 LVDS Channels
- 16.7M Colors
- Capacitive Touch Panel available

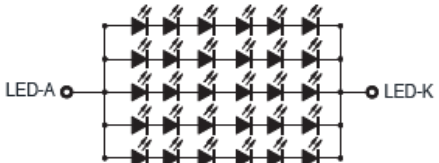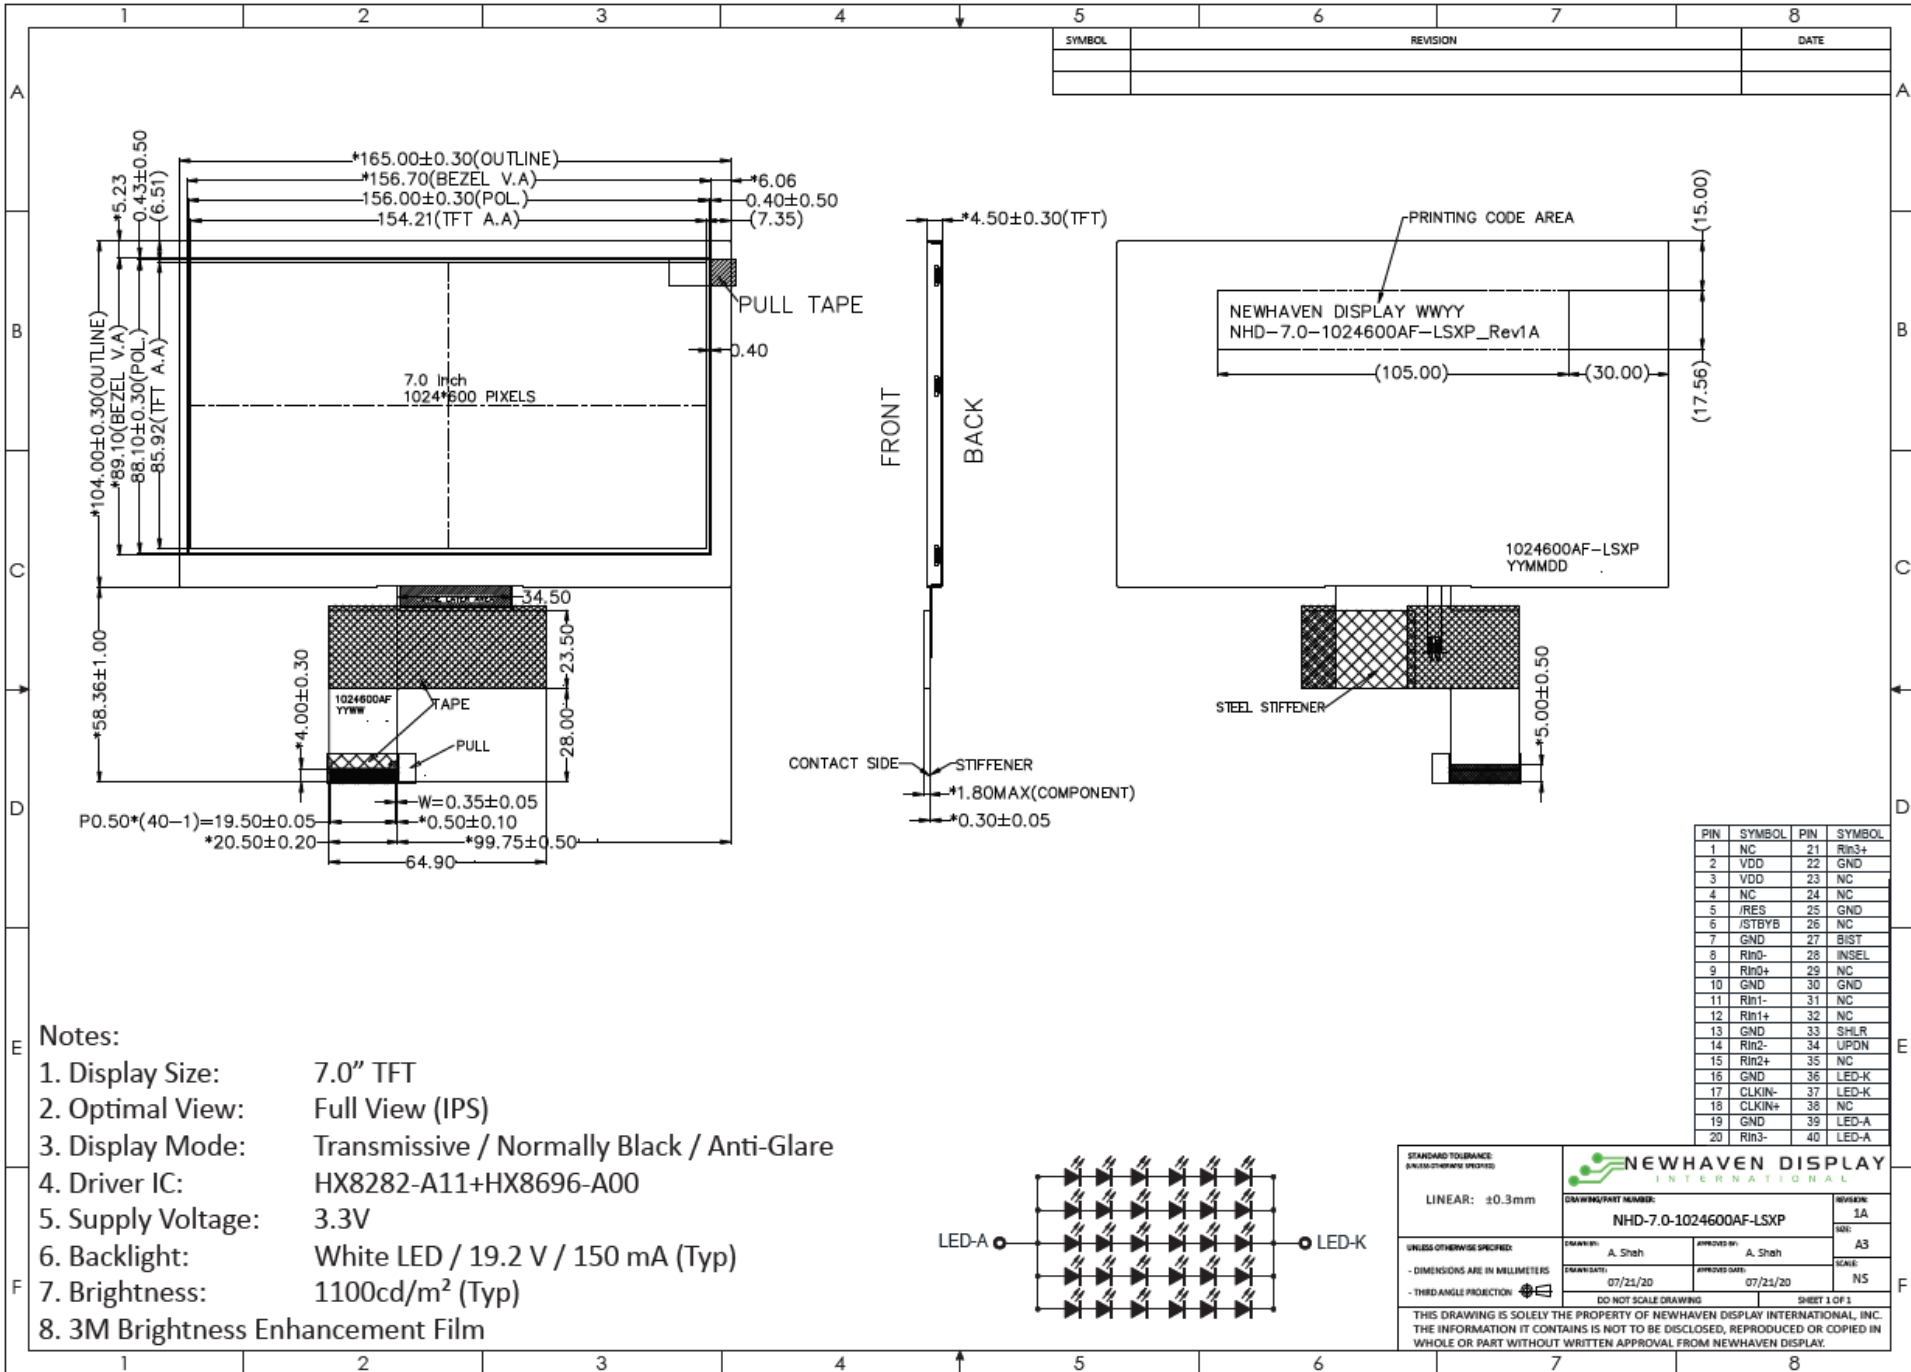

Pin Description

Pin No.	Symbol	Connection	Function Description
1	NC	-	No connection
2-3	V _{DD}	Power Supply	Supply voltage for LCD (+3.3V)
4	NC	-	No connection
5	/RES	MPU	Active LOW Reset signal (normally pull high)
6	/STBYB	MPU	Active LOW Standby signal (normally pull high)
7	GND	Power Supply	Power Ground
8	Rin0-	MPU	-LVDS differential data input CH0
9	Rin0+	MPU	+LVDS differential data input CH0
10	GND	Power Supply	Ground
11	Rin1-	MPU	-LVDS differential data input CH1
12	Rin1+	MPU	+LVDS differential data input CH1
13	GND	Power Supply	Ground
14	Rin2-	MPU	-LVDS differential data input CH2
15	Rin2+	MPU	+LVDS differential data input CH2
16	GND	Power Supply	Ground
17	CLKIN-	MPU	-LVDS differential Clock
18	CLKIN+	MPU	+LVDS differential Clock
19	GND	Power Supply	Ground
20	Rin3-	MPU	-LVDS differential data input CH3
21	Rin3+	MPU	+LVDS differential data input CH3
22	GND	Power Supply	Ground
23 - 24	NC	-	No connection
25	GND	Power Supply	Ground
26	NC	-	No Connection
27	BIST	MPU	Built in Self-Test BIST = H: Self-Test Enabled BIST = L: Normal Operation (Default)
28	INSEL	MPU	Data Input Format: INSEL = L 8-Bit LVDS Input (Default) INSEL = H 6-Bit LVDS Input
29	NC	-	No connection
30	GND	Power Supply	Power Ground
31-32	NC	-	No connection
33	SHLR	MPU	Gate Driver Left/Right Scan Setting: SHLR = H: Normal Scan (Default) SHLR = L: Reverse Scan
34	UPDN	MPU	Gate Driver Up/Down Scan Setting: UPDN = H: Reverse Scan UPDN = L: Normal Scan (Default)
35	NC	-	No Connection
36-37	LED-K	Power Supply	Backlight Cathode (Ground)
38	NC	-	No connection
39-40	LED-A	Power Supply	Backlight Anode (150mA @ 19.2V)

Recommended LCD connector: 40pin 0.5mm pitch FFC. Molex P/N: 54104-4031 (top contact)

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T _{OP}	Absolute Max	-20	-	+70	°C
Storage Temperature Range	T _{ST}	Absolute Max	-30	-	+80	°C
Supply Voltage for LCD	V _{DD}	-	3.0	3.3	3.6	V
Supply Current for LCD	I _{DD}	V _{DD} = 3.3V	60	120	180	mA
LVDS Differential input high Threshold voltage	R _{XVTH}	R _{XVCM} = 1.2V	-	-	+100	mV
LVDS Differential input low Threshold voltage	R _{XVTL}		-100	-	-	mV
LVDS Differential input common mode voltage	R _{XVCM}	-	VID /2	-	2.4- VID /2	V
LVDS Differential voltage	VID	-	200	-	600	mV
Backlight Supply Current	I _{LED}	-	-	150	175	mA
Backlight Supply Voltage	V _{LED}	I _{LED} = 150 mA	18	19.2	20.4	V
Backlight Lifetime*	-	T _{OP} = 25° C	20,000	-	-	Hrs.

*Backlight lifetime is rated as Hours until **half-brightness**, under normal operating conditions. The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated

Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Optimal Viewing Angles	Top	Cr ≥ 10	-	85	-	°	
	Bottom		-	85	-	°	
	Left		-	85	-	°	
	Right		-	85	-	°	
Contrast Ratio	CR	-	500	800	-	-	
Luminance	L _V	I _{LED} = 150mA	800	1100	-	cd/m ²	
Response Time	T _R + T _F	T _{OP} = 25°C	-	25	40	ms	
Chromaticity	Red	X _R	-	0.563	0.603	0.643	-
		Y _R	-	0.308	0.348	0.388	-
	Green	X _G	-	0.273	0.313	0.353	-
		Y _G	-	0.541	0.581	0.621	-
	Blue	X _B	-	0.118	0.158	0.198	-
		Y _B	-	0.066	0.106	0.146	-
	White	X _W	-	0.263	0.303	0.343	-
		Y _W	-	0.270	0.310	0.350	-

Driver Information




Built-in HX8282 Source Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/HX8282-A01.pdf>

Built-in HX8696 Gate Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/HX8696-A.pdf>


Timing Characteristics

Parameter	Symbol	Spec			Unit	Condition
		Min.	Typ.	Max.		
Clock frequency	R_{XFCLK}	20	-	71	MHz	-
Input data skew margin	T_{RSKM}	500	-	-	pS	$ VID = 400mV$ $R_{XVCM} = 1.2V$ $R_{XFCLK} = 71MHz$
Clock high time	T_{LVCH}	-	$4/(7 * R_{XFCLK})$	-	nS	-
Clock low time	T_{LVCL}	-	$3/(7 * R_{XFCLK})$	-	nS	-
PLL wake-up time	T_{emPLL}	-	-	150	μS	-


Parameter	Symbol	Spec			Unit	Condition
		Min.	Typ.	Max.		
Modulation Frequency	$SSCMF$	23	-	93	KHz	-
Modulation Rate	$SSCMR$	-	-	± 3	%	LVDS Clock = 71 MHz

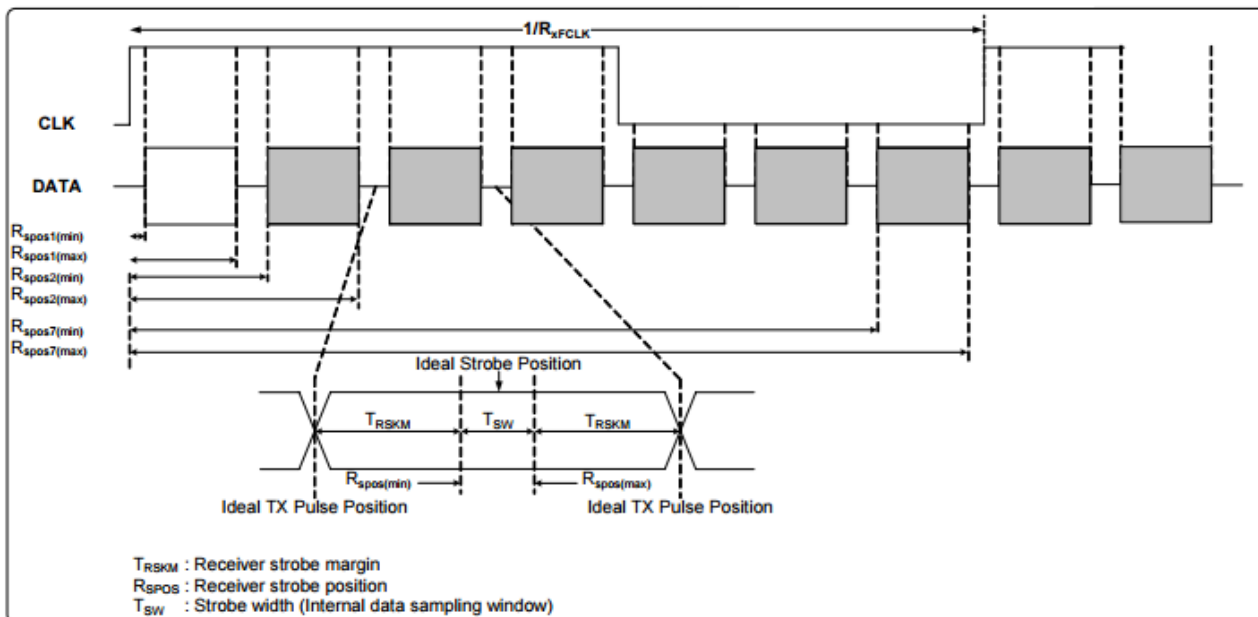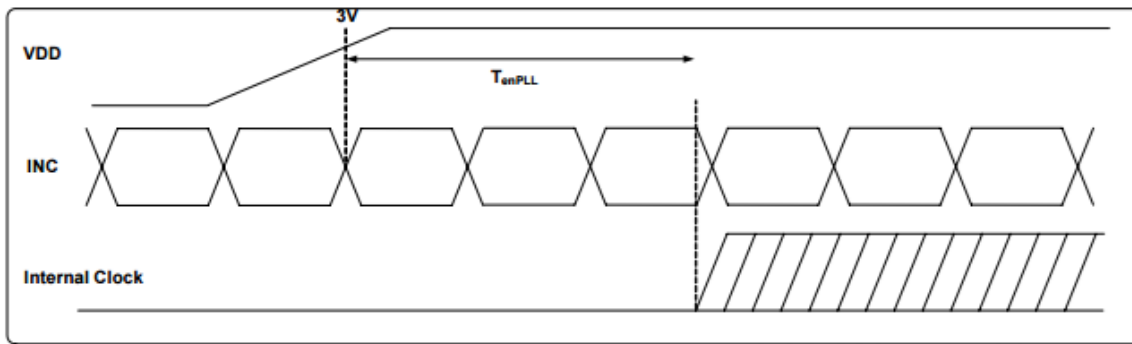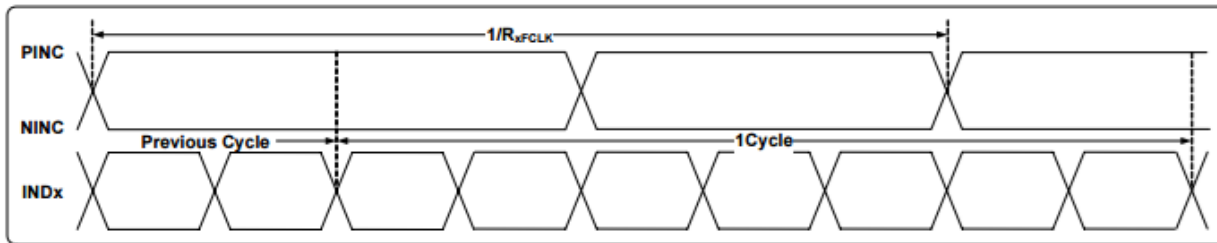

6-bit LVDS data input format:

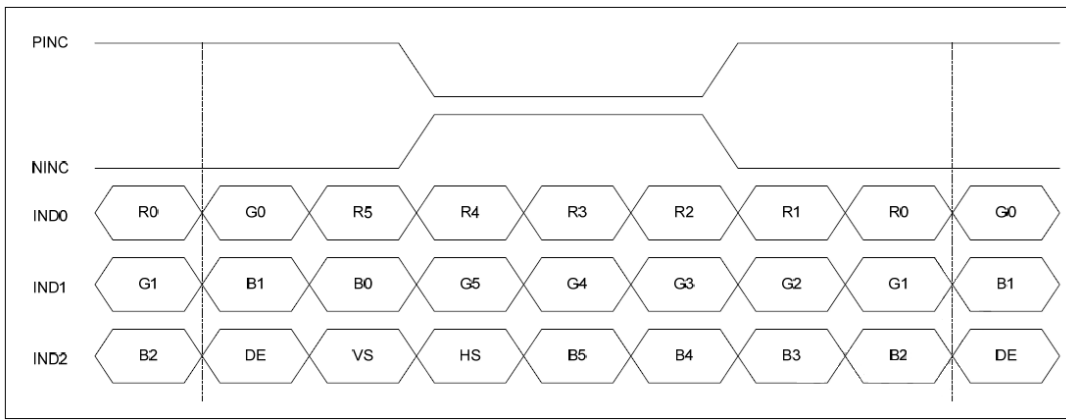

8-Bit LVDS Data Input Format:

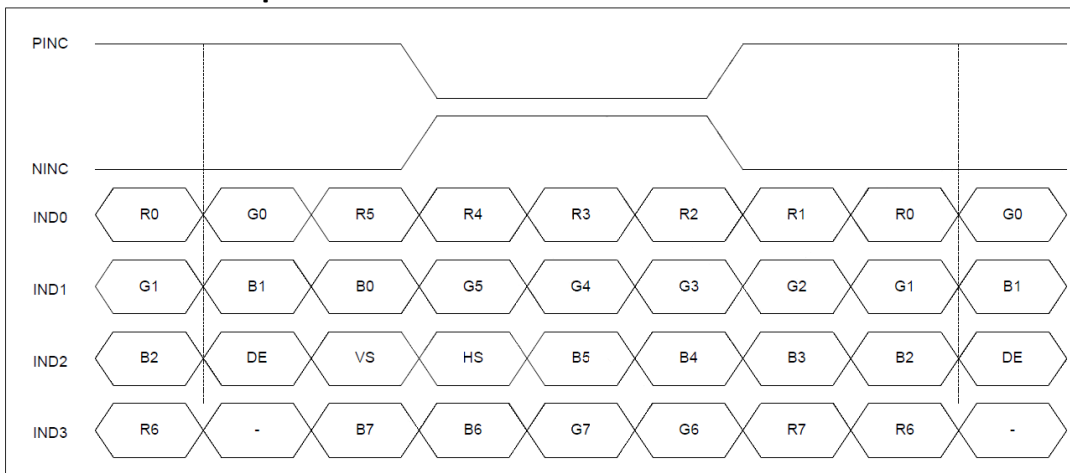

Horizontal & Vertical Timing (1024x600)

Item	Symbol	Spec.			Unit	
		Min.	Typ.	Max.		
DCLK Frequency	F _{CLK}	44.9	51.2	63	MHz	
HSYNC	Horizontal Display Area	T _{HD}	1024			DCLK
	HSD Period	T _H	1200	1344	1400	DCLK
	HSD Pulse Width	T _{HPW}	1	-	140	DCLK
	HSD Back Porch	T _{HBP}	160			DCLK
	HSD Front Porch	T _{HFP}	16	160	216	DCLK
VSYNC	Vertical Display Area	T _{VD}	600			T _H
	VSD Period	T _V	624	635	750	T _H
	VSD Pulse Width	T _{VPW}	1	-	20	T _H
	VSD Back Porch	T _{VBP}	23			T _H
	VSD Front Porch	T _{VFP}	1	12	127	T _H

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80°C, 240 hrs.	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C, 240 hrs.	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C, 120 hrs.	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C, 120 hrs.	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+50°C, 90% RH, 120 hrs.	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-30°C, 30min->25°C, 10min -> 80°C, 30min 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	Frequency: 250 r/min Amplitude: 1 inch Time: 45min	3
Static electricity test	Endurance test applying electric static discharge.	Air: $V_s=\pm 8KV$, Contact: $V_s=\pm 4KV$ 10 Times	

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms