1.8" Front Light Panel

12616-xx | Product Data Sheet | 2020



Overview

The **FLEx Front Light Panel** optical film is designed to laminate to the front surface of **Sharp reflective display (LS018B7DH02)** to provide high quality on-demand display lighting. This thin plastic panel incorporates only a single LED which enables product designers to develop ultra-thin devices and minimize battery use.

- One low-power LED (included in Front Light)
- Over 80x less power compared to traditional backlighting
- 0.05 mm thick FLEx film is over 5x thinner than alternative lightguides
- Simple I/F and Connectivity to System Board

For more information:


WEB flexlighting.com


CONTACT flexlighting.com/contact

PHONE 773-295-0305




Mechanical

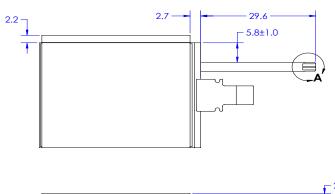






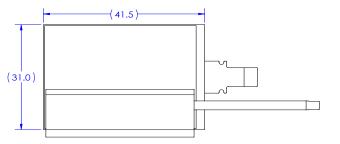

PRELIMINARY

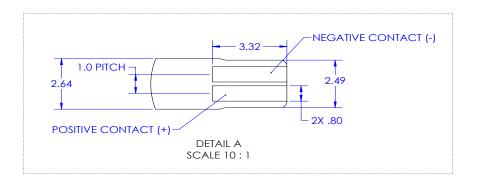

All dimensions in mm


1.8" Front Light Panel


12616-xx | Product Data Sheet | 2020



Electrical

Item	Symbol	Typical	Absolute Max	Unit
Forward Current	I _F	5	25	mA
Pulse Forward Current	l _{EP}		80	mA
Reverse Voltage	V _D		5	V

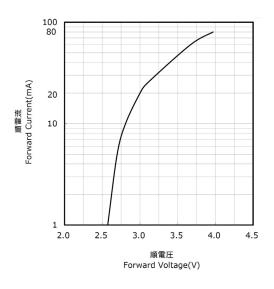

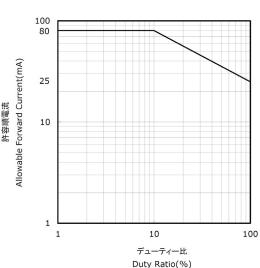


For more information: WEB flexlighting.com CONTACT flexlighting.com/contact PHONE 773-295-0305

Example ZIF Connectors:

- Molex 503480-0400
- Molex 52745-0497
- Molex 54550-0471
- Molex 54548-0471 (bottom)
- Molex 505110-0492


Optical

1.8" Sharp + Front Light (12616-xx)								
Item		Symbol	TYP.	Unit	Remark			
Viewing Angle CR >2	V	Θ 11 Θ 12	60 30	° (Degree)	[Remark1]			
	Н	Θ 21 Θ 22	65 65	° (Degree)				
Contrast Ratio	Front light ON	CR	14		[Remark 2]			

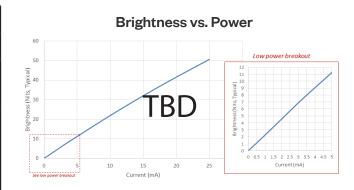

012 011

Remark 1: Viewing Angle



Remark 2: Definition of Contrast Ratio

Contrast Ratio (CR) = $\frac{\text{Reflection intensity in white display}}{\text{Reflection intensity in black display}}$

Measurements taken with a Minolta Chroma Meter CS-100 at a 17" view distance