


Relay, 1 changeover contact, 24 V DC, can be used with 24 V DC complete unit

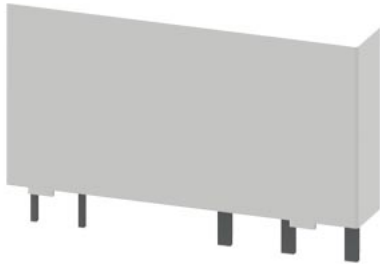

Substance Prohibitance (Date)	01.07.2006 00:00:00
operational current of auxiliary contacts at DC-13 at 230 V	0.1 A
ambient temperature during operation	-25 ... +55 °C

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TX7014-7BM00>

#### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7014-7BM00>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7014-7BM00>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TX7014-7BM00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7014-7BM00&lang=en)

#### Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7014-7BM00/manual>

last modified:

12/23/2020 