

## SDN-P DIN Rail Series

The SDN DIN Rail power supplies provide industry leading performance. Sag Immunity, transient suppression and noise tolerant, the SDN series ensures compatibility in demanding applications. Power factor correction to meet European directives, hazardous location approvals and optional redundant accessories allow the SDN series to be used in a wide variety of applications. Wide operation temperature range, high tolerance to shock and vibration and reliable design make the SDN series the preferred choice of users everywhere.

### Features

- Power Factor Correction (per EN61000-3-2)
- Auto Select 115/230 Vac, 50/60 Hz Input
- Single Phase models meet SEMI F47 Sag Immunity
- Class 1, Zone 2 Hazardous Locations
  - ATEX approval on 2.5 through 10A, 24 Vdc Single Phase Models
  - ATEX approval pending on 12 Vdc and 48 Vdc single phase models
- Improved metal mounting clip
- DC OK Signal
- Adjustable Voltage
- SDN10-24-100P New Compact width (3.26")
- Parallel Capability standard on all units
- Industrial grade design
  - -10°C to 60°C operation without derating. Indefinite short circuit, overvoltage and overtemperature protection.
  - Powers high inrush loads without shutdown or foldback
  - Rugged metal case and DIN connector
- SDN2.5-24-100P and SDN4-24-100LP meet NEC Class 2
- Narrow width on rail for space critical applications
- User-friendly front panel
  - Large, rugged, accessible, multiple connection screw terminations
  - Easy installation
- Broad range of product to fit almost any application – 2.5 A through 40 A, 24 Vdc
- Single and three phase inputs available
- 12 Vdc and 48 Vdc single phase models available
- Highly efficient >90% switching technology
- High MTBF and reliability
- RoHS compliant



### Related Products

- SDP™ Series
- SFL Series
- SCP Series
- SCL Series
- SDU UPS

### Applications

- Industrial/Machine Control
- Process Control
- Conveying Equipment
- Material Handling
- Vending Machines
- Packaging Equipment
- DeviceNet™
- Amusement Park Equipment
- Semiconductor Fabrication Equipment

### Accessories

- Chassis Mount Bracket (SDN-PMBRK2)



| Description                                    | Catalog Number  |                                     |                             |
|--|---|-------------------------------------|-----------------------------|
|  | SDN 9–12–100P   | SDN 5–48–100P                       | SDN 16–12–100P              |
| <b>Input</b>                                   |   |                                     |                             |
| Nominal Voltage                                | 115/230 Vac auto select   |                                     |                             |
| –AC Range                                      | 85-132/176-264 Vac  |                                     |                             |
| –DC Range <sup>1</sup>                         | 210-375 Vdc   |                                     |                             |
| –Frequency                                     | 47-63 Hz, 400 Hz  |                                     |                             |
| Nominal Current <sup>2</sup>                   | 2.0 A / 1.5 A   | 4 A / 2.3 A                         | 3.3 A / 1.7 A               |
| –Inrush current max.                           | Typ. < 20 A   | typ. < 40 A                         |                             |
| Efficiency <sup>2</sup> (Losses <sup>3</sup> ) | > 84% typ. (17.28 W)  | > 88% typ. (28.8 W)                 | > 84% typ. (30.72 W)        |
| Power Factor Correction                        | Units fulfill EN61000-3-2   |                                     |                             |
| <b>Output</b>                                  |   |                                     |                             |
| Nominal Voltage                                | 12 V (11.8-15.2 Vdc Adj.)   | 48 V (35.8 - 52 Vdc Adj.)           | 12 V (11.6-14.0 Vdc Adj.)   |
| Tolerance                                      | < ±2 % overall (combination Line, load, time and temperature related changes)   |                                     |                             |
| –Line Regulation                               | < 0.5%  |                                     |                             |
| –Load Regulation                               | < 0.5%  |                                     |                             |
| –Time & Temp. Drift                            | < 1%  |                                     |                             |
| Ripple <sup>3</sup>                            | < 50 mVpp   |                                     |                             |
| Overvoltage Protection                         | < 16 Vdc with auto-recovery   | < 60 Vdc with auto-recovery         | < 16 Vdc with auto-recovery |
| Nominal Current                                | 9 A (108 W)   | 5 A (240 W)                         | 16 A (192 W)                |
| –Current Limit <sup>4</sup>                    | 110% of nominal - Fold Forward (Current rises, voltage drops to maintain constant power during overload up to max peak current)   |                                     |                             |
| Holdup Time <sup>5</sup>                       | >20 ms (Full load, 100 Vac Input @ T <sub>amb</sub> =+25°C) to 95% output Voltage   |                                     |                             |
| Parallel Operation                             | Supplies will not be damaged with parallel operation  |                                     |                             |
| Power Back Immunity                            | 16 Vdc  | 60 Vdc                              | 16 Vdc                      |
| <b>General</b>                                 |   |                                     |                             |
| EMC:<br>–Emissions                             | EN61000-6-3, EN61204-3, EN55022 Class B, EN61000-3-2, EN61000-3-3   |                                     |                             |
| –Immunity                                      | EN61000-6-2, EN61204-3, EN55024, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8, IEC61000-4-11  |                                     |                             |
| Approvals                                      | UL508 Listed, cULus; UL 60950-1, cURus; CE (LVD 73/23 & 93/68/EEC), (EMC 89/336 & 93/68/EEC). EN61000-3-2; UL 60079-15 pending (Class 1, Zone 2 hazardous location, Groups IIA, IIB, IIC w/ T3 temp. class up to 60°C Ambient.); EN60079-15 (ATEX); SEMI F47 Sag Immunity, RoHS |                                     |                             |
| Temperature                                    | Storage: -25 to +85°C, Operation -10 to +60°C full power; with linear derating to half power from 60 to 70°C (Convection cooling, no forced air required). Operation up to 50% load permissible with sideways or front side up mounting orientation.                            |                                     |                             |
| Humidity                                       | < 90% RH, non-condensing; IEC 68-2-2, 68-2-3  |                                     |                             |
| MTBF:  | >500,000 hrs  |                                     |                             |
| – Standard                                     | Telcordia/Bellcore, Issue Case 3 @25°C  |                                     |                             |
| Warranty                                       | 5 years   |                                     |                             |
| General Protection/Safety                      | Protected against Continuous short -circuit, Continuous overload, Continuous open circuit. Protection Class 1 (IEC536), Degree of Protection IP20 (IEC 529) Safe low voltage: SELV (acc. EN60950)   |                                     |                             |
| Status Indicators (Visual)                     | Green LED on when V <sub>out</sub> > 75% (with ± 5% tolerance) of nominal output voltage  |                                     |                             |
| Status Indicators (Relay)                      | Normally Open solid state relay - signal active when V <sub>out</sub> >70% of nominal output voltage (rated up to 200 mA, 60 Vdc)   |                                     |                             |
| <b>Installation</b>                            |   |                                     |                             |
| Fusing<br>–Input                               | Internally fused  |                                     |                             |
| –Output  | Outputs are capable of providing high currents for short periods of time for inductive load startup or switching. Fusing may be required if Nominal O/P current rating cannot be tolerated. Continuous current overload allows for reliable fuse tripping.                      |                                     |                             |
| Mounting                                       | Simple snap-on to DIN TS35/7.5 or TS35/15 rail system. Unit should handle normal shock and vibration of industrial use and transportation without falling off the rail.   |                                     |                             |
| Connections                                    | <b>Input:</b> Screw terminals, connector size range: 16-10 AWG (1.5-6mm <sup>2</sup> ) for solid conductors.<br><b>Output:</b> Two terminals per output, connector size range: 16-10 AWG (1.5-6mm <sup>2</sup> ) for solid conductors.  |                                     |                             |
| Case   | Fully enclosed metal housing with fine ventilation grid to keep out small parts.  |                                     |                             |
| –Free Space                                    | 70 mm above and below, 25 mm left and right, 15mm in front  |                                     |                             |
| H x W x D (inches/mm)                          | 4.88 x 2.56 x 4.55 (124 x 65 x 116)   | 4.88 x 3.26 x 4.55 (124 x 83 x 116) |                             |
| Weight (lbs/kg)                                | 2.4 (1.05)  | 3.3 (1.48)                          | 3.3 (1.48)                  |


1. Input current ratings are specified with low input, line conditions and worst case efficiency values. Input current at nominal input settings will be typically half these values.

2. Losses are heat dissipation in watts at full load, nominal line.


3. Ripple/ noise is stated as typical values when measured with a 20 MHz bandwidth scope and 50 Ohm resistor.

4. Unit shall not shutdown or 'hiccup' during overload or short circuit. Maximum current value shown shall be maintained indefinitely without damage to the supply. Voltage shall drop according to amount of overload to protect supply from damage.

### SDN™ Series Dimensions

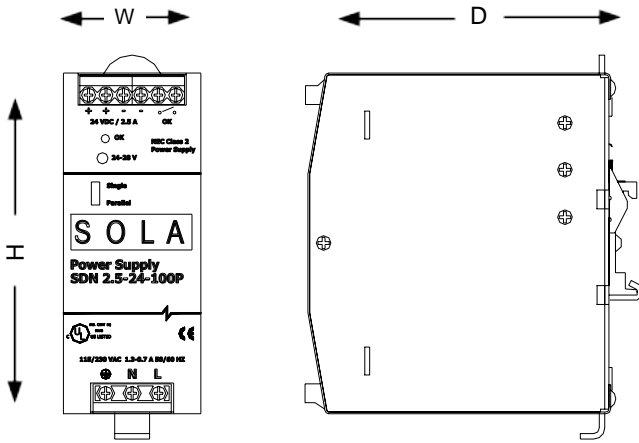

| Catalog Number  | Dimensions – inches (mm) |            |            |
|-----------------|--------------------------|------------|------------|
|                 | H                        | W          | D          |
| <b>12 Vdc</b>   |                          |            |            |
| SDN 9–12–100P   | 4.88 (124)               | 2.56 (65)  | 4.55 (116) |
| SDN 16–12–100P  | 4.88 (124)               | 3.26 (83)  | 4.55 (116) |
| <b>24 Vdc</b>   |                          |            |            |
| SDN 2.5–24–100P | 4.88 (124)               | 1.97 (50)  | 4.55 (116) |
| SDN 4–24–100LP  | 4.88 (124)               | 2.56 (65)  | 4.55 (116) |
| SDN 5–24–100P   | 4.88 (124)               | 2.56 (65)  | 4.55 (116) |
| SDN 5–24–480    | 4.88 (124)               | 2.91 (73)  | 4.55 (116) |
| SDN 10–24–100P  | 4.88 (124)               | 3.26 (83)  | 4.55 (116) |
| SDN 20–24–100P  | 4.88 (124)               | 6.88 (175) | 4.55 (116) |
| <b>48 Vdc</b>   |                          |            |            |
| SDN 5–48–100P   | 4.88 (124)               | 3.26 (83)  | 4.55 (116) |

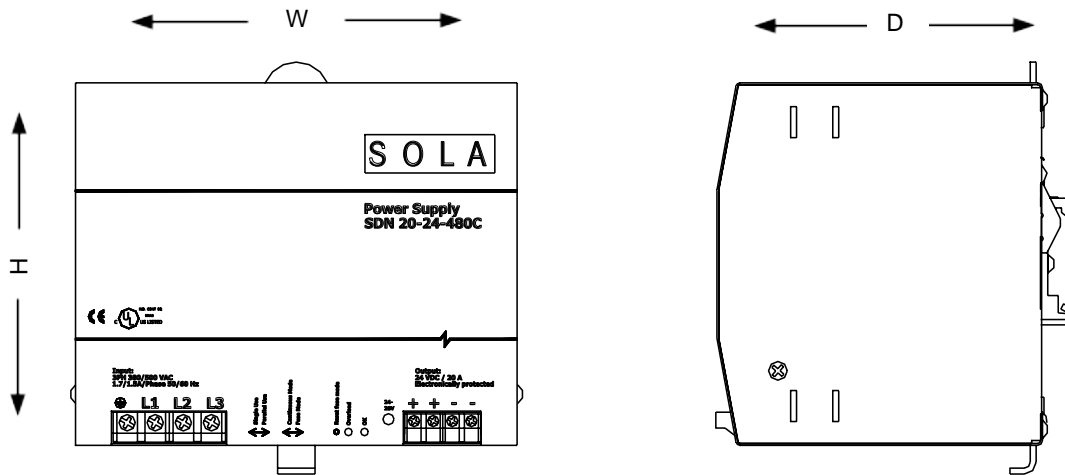

| Catalog Number | Dimensions – inches (mm) |             |            |
|----------------|--------------------------|-------------|------------|
|                | H                        | W           | D          |
| SDN 10–24–480  | 4.88 (124)               | 5.90 (150)  | 4.55 (116) |
| SDN 30–24–480  | 4.88 (124)               | 9.72 (247)  | 4.55 (116) |
| SDN 40–24–480  | 4.88 (124)               | 11.10 (282) | 4.55 (116) |