

Measuring instrument - EEM-EM357 - 2908588

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Three-phase power meter for active power measurement with direct measurement in networks of up to 500 V / 80 A, with S0 output, with digital input and RS-485 interface, certified in accordance with the MID directive



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626338262

Technical data

Dimensions

Width	72 mm
Height	90 mm
Depth	67 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 75 °C
Max. permissible relative humidity (operation)	80 %
Degree of protection	IP51 (Front) IP20 (Connections)

Input data

Designation	Measuring input
Input voltage range	3x 184 V ... 288 V (320 V ... 500 V)
Power consumption	3.5 VA (1 W)
Frequency range	45 Hz ... 65 Hz
Energy (EN 50470-3)	Class B
Real energy (IEC 62053-21)	Class 1

Measuring instrument - EEM-EM357 - 2908588

Technical data

Input data

Reactive power (IEC 62053-23)	Class 2
Designation	Digital input
Description of the input	Active opto-isolated
Input voltage range	80 V AC/DC ... 276 V AC/DC

Output data

Designation	S0 output
Output description	Passive opto-isolated
Maximum switching voltage	27 V DC
Max. switching current	27 mA

Communication interface

Communication protocol	Modbus
Communication standard	RS-485
Transmission speed range	300 bps ... 57600 bps

General

Degree of protection	IP51 (Front)
	IP20 (Connections)
Protection class	II (EN 50470-1)
Electric strength	6 kV
	4 kV (EN 50470-3, 7.2)

Connection data

Connection name	Measurement connection
Connection method	Screw connection
Conductor cross section solid	1.5 mm ² ... 35 mm ²
Tightening torque	2 Nm

Connection data 2

Connection name	Other connections
Connection method	Screw connection
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Tightening torque	0.5 Nm

Standards and Regulations

Standards/specifications	EN 50470-1 EN 50470-3
Conformance	CE-compliant
MID	MID-compliant


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Measuring instrument - EEM-EM357 - 2908588

Connection diagram

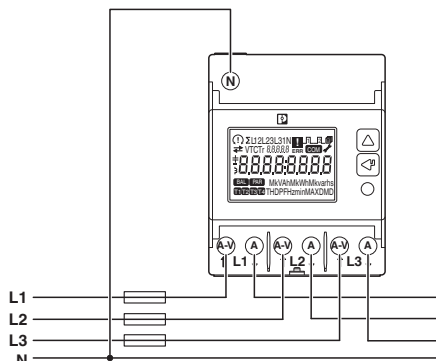

Classifications

eCl@ss

eCl@ss 10.0.1	27142330
eCl@ss 11.0	27142330
eCl@ss 5.0	27200307
eCl@ss 5.1	27200307
eCl@ss 6.0	27142300
eCl@ss 7.0	27142330
eCl@ss 9.0	27142330

ETIM

ETIM 4.0	EC002308
ETIM 6.0	EC002301
ETIM 7.0	EC002301

Approvals

Approvals

Approvals

EAC / MID

Ex Approvals

Approval details

EAC		RU *- DE.A*30.B.01628
-----	--	--------------------------

Measuring instrument - EEM-EM357 - 2908588

Approvals

MID	No. 308/MID
-----	-------------

Phoenix Contact 2022 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>