




8130-8162

Precision Diagonal Cutters with Oval Head and ESD Safe Handle



PRODUCT DETAILS

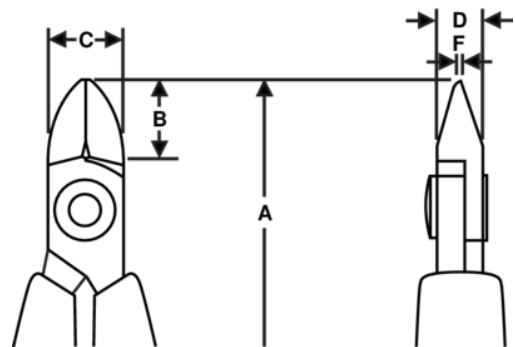


- 80 Series precision diagonal cutters
- ESD safe mono-material handles with return spring
- Micro-bevel, flush and ultra-flush cut
- The cutting capacity given is for copper wire
- Suitable for cutting Cu
- High performance alloyed steel
- Phosphate finish
- Numerically controlled machine grinding guarantees edge angle accuracy and contact, increases the tools reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint that minimizes friction and maximizes alignment of cutting edges
- Ideal for wire harness work and standard printed circuit board assembly
- CO standard handle shape in conductive material



Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D	F			
8130	108.0 mm	8 mm	8 mm	5 mm	0.8 mm	0.2-1.0 mm	Micro	43 g
8131	108.0 mm	8 mm	8 mm	5 mm	0.8 mm	0.1-1.0 mm	Flush	43 g
8131 CO	108.0 mm	8 mm	8 mm	5 mm	0.8 mm	0.1-1.0 mm	Flush	43 g
8132	108.0 mm	8 mm	8 mm	5 mm	0.8 mm	0.1-0.8 mm	Ultra	44 g
8140	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.2-1.25 mm	Micro	46 g
8140 CO	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.2-1.25 mm	Micro	46 g
8141	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.1-1.25 mm	Flush	45 g
8141 CO	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.1-1.25 mm	Flush	45 g
8142	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.1-1.0 mm	Ultra	46 g
8142 CO	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.1-1.0 mm	Ultra	46 g
8150	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.3-1.6 mm	Micro	50 g
8150 CO	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.3-1.6 mm	Micro	50 g
8150 J	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	Max 0.5 mm	Micro	50 g
8151	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.6 mm	Flush	49 g
8151 CO	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.6 mm	Flush	49 g
8152	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.1-1.25 mm	Ultra	49 g
8160	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.4-2.0 mm	Micro	88 g
8160 CO	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.4-2.0 mm	Micro	88 g
8160 J	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	Max 0.5 mm	Micro	87 g
8161	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-2.0 mm	Flush	88 g
8161 CO	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-2.0 mm	Flush	88 g
8162	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-1.6 mm	Ultra	88 g

