




8143-8165

Precision Diagonal Cutters with Tapered Head and ESD Safe Handle



PRODUCT DETAILS

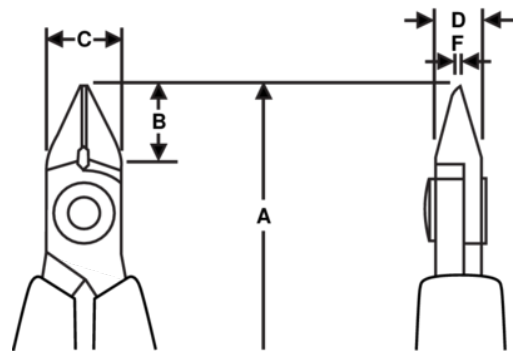


- 80 Series precision diagonal cutters with tapered head
- ESD safe mono-material handles with return spring
- Micro-bevel, flush and ultra-flush cut
- The cutting capacity given is for copper wire
- Suitable for cutting Cu
- High performance alloyed steel
- Phosphate finish
- Numerically controlled machine grinding guarantees edge angle accuracy and contact, increases the tools reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint that minimizes friction and maximizes alignment of cutting edges
- Ideal for assembly work where accessibility is a consideration
- CO standard handle shape in conductive material



Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D	F			
8143	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.2-1.25 mm	Micro	46 g
8144	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.2-1.25 mm	Flush	46 g
8144 CO	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.2-1.25 mm	Flush	46 g
8145	110.0 mm	10 mm	10 mm	6 mm	0.8 mm	0.1-1.0 mm	Ultra	46 g
8153	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.3-1.6 mm	Micro	49 g
8154	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.6 mm	Flush	49 g
8154 CO	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.6 mm	Flush	49 g
8155	112.5 mm	12.5 mm	12.5 mm	6 mm	1.2 mm	0.2-1.25 mm	Ultra	49 g
8163	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.4-2.0 mm	Micro	88 g
8163 CO	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.4-2.0 mm	Micro	88 g
8164	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-2.0 mm	Flush	88 g
8165	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-1.6 mm	Ultra	88 g
8165 CO	125.0 mm	16 mm	16 mm	8 mm	1.6 mm	0.3-1.6 mm	Ultra	88 g

