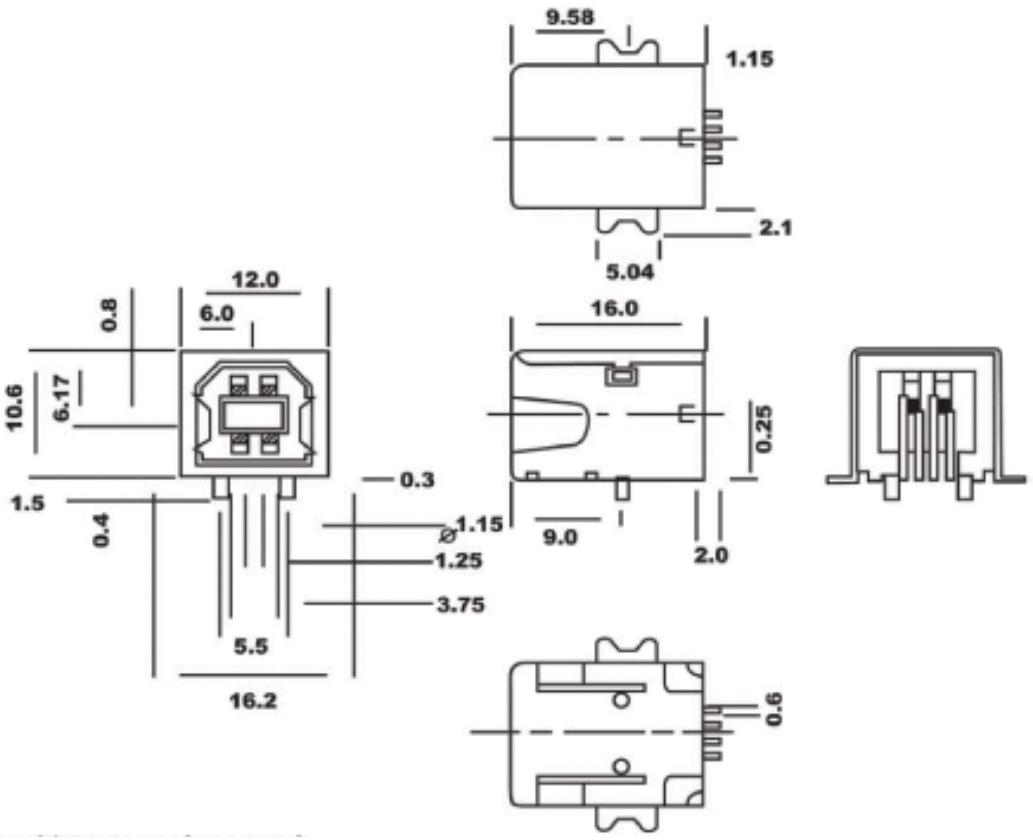

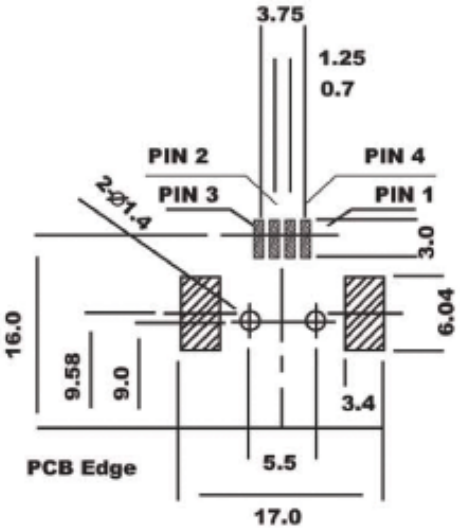

(Component Side)
PCB Layout

NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(PBT+GF)
COLOR:BLACK/WHITE/BROWN/BEIGE----
CONTACT: BRASS
SHELL:BRASS
PLATING:
CONTACT: COLD PLATING 1u",3u",5u"....
SHELL: NICKEL PLATING
SPECIFICATION:
VOLTAGE RATING: 30V
CURRENT RATING: 1A
CONTACT RESISTANCE TERMINAL:30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:750V AC
INSULATION RESISTANCE:1000MΩ MIN

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. **A-USB-B/SMT-R**
(Type B, Version 1.1 5µ" Gold)
A-USB/2-B/SMT-R
(Type B, Version 2.0, 30µ" Gold)

Title USB, Type B, Angled, SMD, White Insulator

Drawing No.

rev00

Replace

Sheet