

## WT21 Bluetooth® Module Description



WT21 is intended for *Bluetooth* applications where a host processor is capable of running the *Bluetooth* software stack. WT21 only implements the low level *Bluetooth* Host Controller Interface (HCI) but still offers advantages of a module - easy implementation and certifications. As based on CSR's BlueCore-6 chip, WT21 offers the lowest current consumption and the highest integration level in its class. WT21 is also fully ready to support the latest *Bluetooth* 2.1 standard.

WT21 also has CSR's AuriStream technology built in, which significantly improves the quality of voice in audio applications.

WT21 supports any *Bluetooth* software stack that implements the standard *Bluetooth* HCI interface. The software stack can interface to the module either via UART, SDIO or SPI interface.

WT21 offers *Bluetooth* in integrated form factor that is easy to understand, manage and source. It is an ideal product for an OEM who does not want to spend significant amount of time and money to RF regulatory approvals and designing a complex 2,4 GHz radio product.


By utilizing Bluegiga's world-class integration services and technical support, OEMs can be assured that their products reach the market quickly and cost efficiently.

## Key Features

- ▶ Highly integrated and cost efficient *Bluetooth* HCI module
- ▶ *Bluetooth* Class 1 radio based on CSR's BlueCore-6
- ▶ Embedded antenna
- ▶ *Bluetooth* 2.1 + EDR compliant
- ▶ *Bluetooth* Controller subsystem CE, FCC and IC qualified
- ▶ Extended temperature range from -40 °C to +85 °C
- ▶ 801.11 co-existence interface
- ▶ AuriStream baseband codec, which provides better audio quality
- ▶ Supports any *Bluetooth* stack with HCI interface



## TECHNICAL DATA

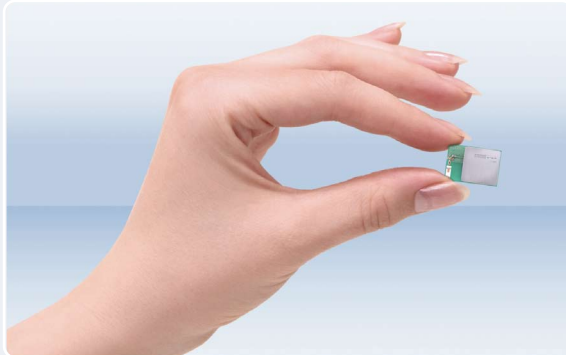

## Firmware & Software

- Supports any standard *Bluetooth* stack with HCI interface
- 128-bit *Bluetooth* encryption available

## Hardware

- *Bluetooth* Class 1 radio (100-150 meters)
  - Nominal output power 6 dBm
  - Nominal sensitivity -87 dBm
  - Uses 2.4 GHz ISM band
  - Based on CSR's BC06 chip
- Host processor interface via UART, SDIO or SPI
- 7xGPIO
- PCM interface for audio applications
- Supply voltage: regulated 3.3 VDC
- PCB form factor: 17,1 x 11,6 x 2 mm
- Operating temperature: -40 °C to +85 °C

## Product Codes

- Chip antenna WT21-A-HCI
- No antenna WT21-N-HCI

## Development and Evaluation

- WT21 Evaluation Kit EKWT21

## Other Products

- WT12 *Bluetooth* Module
- WT11 *Bluetooth* Module
- WT32 *Bluetooth* Audio Module
- Access Servers and Access Points

## Certifications

- *Bluetooth* 2.1 + EDR (Controller subsystem)
- CE, FCC and IC

## Applications

- PCs and laptops
- PDAs
- Embedded systems

For more information about Bluegiga Technologies, please contact:

Bluegiga Technologies Oy  
 Sinikalliontie 5 A  
 02630 Espoo, Finland  
 Phone: +358 9 435 50 60  
 Fax: +358 9 435 50 660  
 www.bluegiga.com  
 sales@bluegiga.com

© Bluegiga Technologies 2000-2010.

Bluegiga Technologies takes no responsibility for any mistakes that might appear in this document. It reserves the right to change devices, software or specifications detailed here at any time without notice, and does not make any commitment to update the information contained here. Bluegiga products are not authorised for any use as critical components in life support devices or systems. Bluegiga Access Server, Access Point, iWRAP and WRAP THOR are trademarks of Bluegiga Technologies. The *Bluetooth* trademark and logo are registered trademarks and are owned by the Bluetooth SIG, Inc.