

samos[®] PRO



samos[®] PRO COMPACT – The safety control of the next generation

With the highest power in the smallest space, the safety control **samos[®] PRO COMPACT** sets new standards in the area of machine automation.

Overview of benefits

- 24 safe in- and outputs on 45 mm construction width for space and cost savings
- USB and Ethernet interfaces for remote maintenance always on board
- Industrial Ethernet protocols integrated
- 512 kbyte program memory offers space for each project
- 4 A switching power at each output
- Ambient temperature -25 °C to $+65\text{ °C}$
- Modular extendability to up to 172 secure in-/outputs
- Optical display of all in- and outputs in system
- Pluggable connection technology with either screw or push-in terminal blocks



samos® PRO COMPACT — Universal application

samos® PRO COMPACT is suitable for monitoring non-contact safety sensors, Emergency Off buttons, protective door switches and door closures, two-hand controls as well as testable safety light barriers, light curtains and laser scanners.



samos® PRO



Applications in many branches

samos® PRO COMPACT is not only suitable for use in machinery and plant engineering but also, for example, for safety-related control tasks in elevator installations, industrial combustion plants and process technology systems.



samos®PLAN 5+ – The programming tool for **samos®**PRO COMPACT

With the new software **samos®**PLAN 5+ for the system **samos®**PRO COMPACT, programming is now even easier. With its many practical functions, **samos®**PLAN 5+ supports the project developer in generating and validating safety applications, and documenting them in full compliance with the current Machinery Directive.

Overview of benefits

- Comprehensive library of reliable, certified functions
- Configurable project documentation at the press of a button
- Integrated simulation and logic analysis of the safety functions
- Convenient support for fieldbus and industrial Ethernet integration
- Online diagnosis and remote maintenance for more transparency



Function blocks

Funktionsblöcke

- ▶ Logik
- ▼ Applikation
 - Reset
 - Restart
 - Ausschaltverzögerung
 - Einstellbare Ausschaltverzögerung
 - Einschaltverzögerung
 - Einstellbare Einschaltverzögerung
 - Schützkontrolle
 - Ventilüberwachung
 - Betriebsartenwahlschalter
 - Nachläuferkennung
- ▶ Zweikanalige Auswertung
- ▶ Muting

Sensors

Ansicht filtern

Module ▼

Sensoren ▲

▼ Befehlsgeräte



Not-Halt, SNH
Einkanalig



Not-Halt, SNH
Zweikanalig




Zustimmschal...
2 Pos. Schalter




Zustimmschal...
3 Pos. Schalter

- ▶ Sicherheitsschalter
- ▶ Schalter mit Zuhaltung
- ▶ Potenzialfreie Kontakte und Wiederanlauf
- ▶ Zweihandbedienung
- ▶ Sicherheitsmatten und Schalleisten
- ▶ Betriebsartenwahlschalter
- ▶ BWS
- ▶ Muting-Sensoren
- Aktoren** ▼
- Favoriten** ▼
- Benutzerdefinierte Elemente** ▼

Hardware

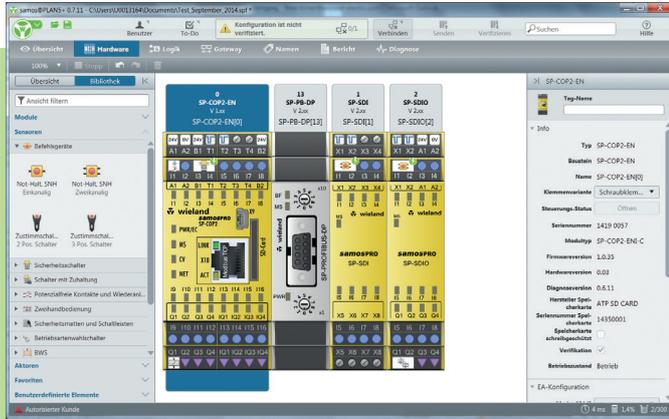


Logic

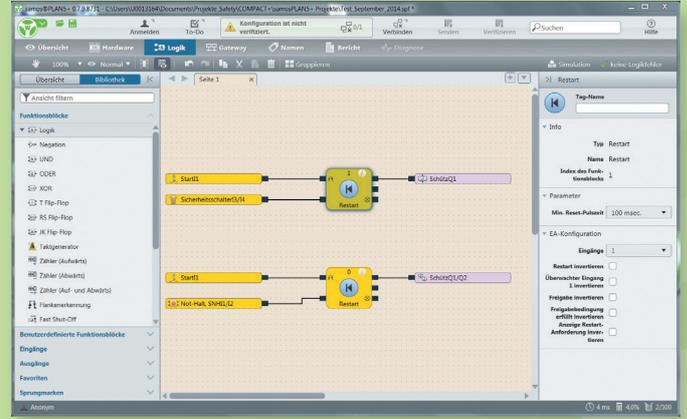


samos[®] PRO


Simulation

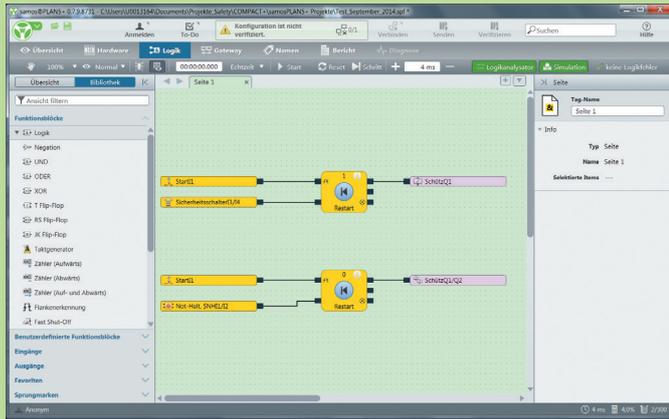


Logic analysis

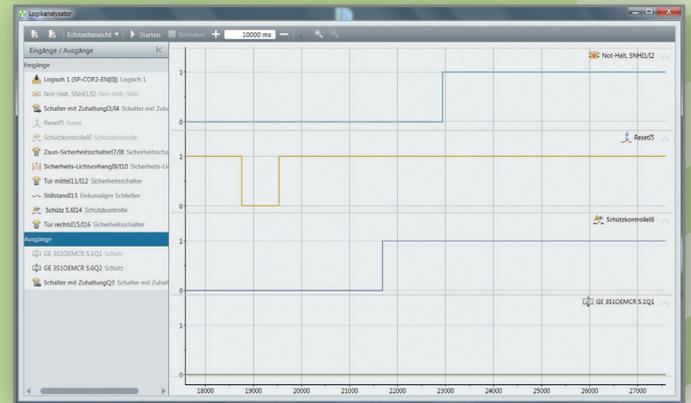

Report

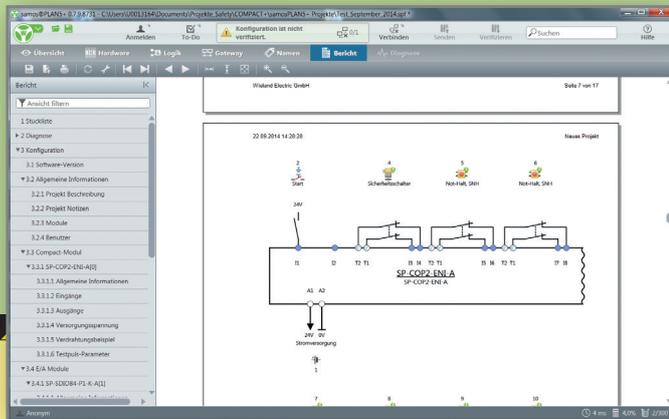

Diagnosis

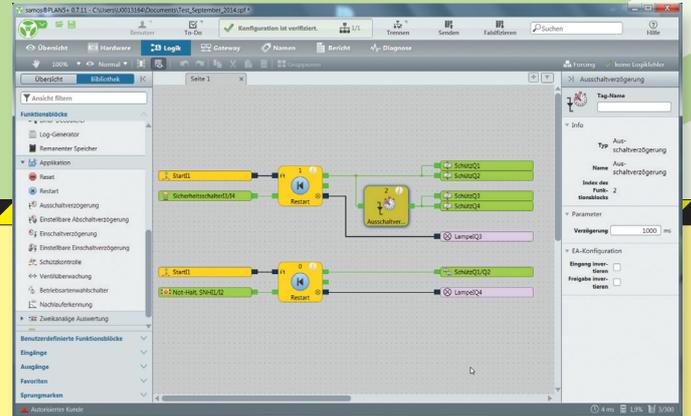

SP-COP1 – COMPACT module



Applications

- Machine building industry
- Combustion plants
- Elevator systems
- SIL_{CL} 3 (EN 62061-1)
- PL e/Category 4 (EN ISO 13849-1)

Features

- 20 safe inputs, 4 safe outputs
- USB interface
- SD slot for program memory (memory card SP-COP-CARD ordered separately)



Overview of devices | part numbers

Type	Rated voltage	Terminals	Remarks	Part no.	Std. Pack
SP-COP1-A	24 V DC	Screw terminals, pluggable	USB-interface	R1.190.1110.0	1
SP-COP1-C	24 V DC	Cage clamp, pluggable	USB-interface	R1.190.1120.0	1

Technical data

Function		Safety control
Function display		24 LED green (in-/outputs) 3 LED green/red/yellow (module status)
Supply circuit		
Operating voltage range		16.8 V DC to 30 V DC
Rated power		3.5 W
Electrical isolation supply circuit - control circuit		No
Secure input circuit I_n		
Quantity/type		20 / digital
Primary voltage range		15 V DC to 30 V DC
Nominal current		2 mA
Secure input circuit Q_n		
Quantity/type		4 / digital
Nominal output voltage		24 V DC
Output current per output		4 A
Short-circuit protective device		Yes
Interfaces		
USB Mini interface		Yes
Ethernet interface		No
Industrial Ethernet protocol		No
Program memory		External
General data		
Protection class as per DIN EN 60529 (housing/terminals)		IP20
Air and creepage distances		EN 60664-1
Ambient temperature / storage temperature		-25 °C – +65 °C / -25 °C – +75 °C
Norms		EN 61508, EN 61511, EN 62061, EN ISO 13849-1, EN 50156-1, EN 81-1
Approvals		TÜV, UL (applied for)

SP-COP2 – COMPACT module with ethernet



Applications

- Machine building industry
- Combustion plants
- Elevator systems
- SIL_{CL} 3 (EN 62061-1)
- PL e/Category 4 (EN ISO 13849-1)

Features

- 16 inputs, 4 outputs, 4 configurable I/O
- USB interface
- Ethernet interface
- Industrial Ethernet protocol
- SD slot for program memory (memory card SP-COP-CARD ordered separately)

samos® PRO

Overview of devices | part numbers

Type	Rated voltage	Terminals	Remarks	Part no.	Std. Pack
SP-COP2-EN-A	24 V DC	Screw terminals, pluggable	USB- / ETH-interface	R1.190.1210.0	1
SP-COP2-EN-C	24 V DC	Cage clamp, pluggable	USB- / ETH-interface	R1.190.1220.0	1
SP-COP2-ENI-A	24 V DC	Screw terminals, pluggable	USB- / ETH-interface	R1.190.1310.0	1
SP-COP2-ENI-C	24 V DC	Cage clamp, pluggable	USB- / ETH-interface	R1.190.1320.0	1

Technical data

Function		Safety control	
Function display		24 LED green (in-/outputs)	
		4 LED green/red/yellow (module status)	
Supply circuit			
Operating voltage range		16.8 V DC to 30 V DC	
Rated power		3.5 W	
Electrical isolation supply circuit - control circuit		No	
Secure input circuit I _n		SP-COP3-EN	SP-COP3-ENI
Quantity/type		20 (16) / digital	20 (16) / digital
Primary voltage range		15 V DC to 30 V DC	15 V DC to 30 V DC
Nominal current		2 mA	2 mA
Secure input circuit Q _n			
Quantity/type		4 (8) / digital	4 (8) / digital
Nominal output voltage		24 V DC	24 V DC
Output current per output		4 A	4 A
Short-circuit protective device		Yes	Yes
Interfaces			
USB Mini interface		Yes	Yes
Ethernet interface		Yes	Yes
Industrial Ethernet protocol		No	Modbus TCP
Program memory		External	External
General data			
Protection class as per DIN EN 60529 (housing/terminals)		IP20	
Air and creepage distances		EN 60664-1	
Ambient temperature / storage temperature		-25 °C – +65 °C / -25 °C – +75 °C	
Norms		EN 61508, EN 61511, EN 62061, EN ISO 13849-1, EN 50156-1, EN 81-1	
Approvals		TÜV, UL (applied for)	

SP-SDIO – Input-/ output module



Applications

- Machine building industry
- Combustion plants
- Elevator systems
- SIL_{CL} 3 (EN 62061-1)
- PL e/Category 4 (EN ISO 13849-1)

Features

- 8 safe inputs
- 4 safe outputs (with/without output test-pulses)
- 2 outputs (e.g., test signals)

Overview of devices | part numbers

Type	Rated voltage	Terminals	Remarks	Part no.	Std. Pack
SP-SDIO84-P1-K-A	24 V DC	Screw terminals, pluggable	with/without output test-pulses	R1.190.0030.0	1
SP-SDIO84-P1-K-C	24 V DC	Cage clamp, pluggable	with/without output test-pulses	R1.190.0040.0	1

Technical data

Function display	13 LEDs, green/red
Power supply circuit	
Operating voltage range	16.8 V DC to 30 V DC
Rated consumption	1.8 W
Electrical isolation power supply circuit - control circuit	no
Safe input circuit I1 – I8	
Quantity / type	8 / digital
Input voltage range	15 V DC to 30 V DC
Rated current	3 mA
Safe output circuits Q1 – Q4	
Quantity / type	4 / digital
Output voltage	24 V DC
Output current I _n per exit	4 A
Output circuits X1, X2	
Quantity / type	2 / digital
Output voltage	24 V DC
Output current I _n per exit	0.5 A
General data	
Protection degree according to DIN 60529 (housing / terminals)	IP40 / IP20
Creepage distances and clearances	EN 60664-1
Ambient temperature / storage temperature	-25°C – +65°C / -25°C – +75°C
Standards	EN 61508, EN 61511, EN 62061, EN ISO 13849-1, EN 50156-1, EN 81-1
Approvals	TÜV, cULus

SP-SDI – Input module



Applications

- Machine building industry
- Combustion plants
- Elevator systems
- SIL_{CL} 3 (EN 62061-1)
- PL e/Category 4 (EN ISO 13849-1)

Features

- 8 safe inputs
- 8 outputs (e.g., test signals)

Overview of devices | part numbers

Type	Rated voltage	Terminals	Part no.	Std. pack
SP-SDI8-P1-K-A	24 V DC	Screw terminals, pluggable	R1.190.0050.0	1
SP-SDI8-P1-K-C	24 V DC	Cage clamp, pluggable	R1.190.0060.0	1

Technical data

Function display	13 LEDs, green/red
Power supply circuit	
Operating voltage range	16.8 V DC to 30 V DC
Rated consumption	1.8 W
Electrical isolation power supply circuit - control circuit	no
Safe input circuit I1 – I8	
Quantity / type	8 / digital
Input voltage range	15 V DC to 30 V DC
Rated current	3 mA
Output circuits X1, X2	
Quantity / type	2 / digital
Output voltage	24 V DC
Output current I _n per exit	0.5 A
General data	
Protection degree according to DIN 60529 (housing / terminals)	IP40 / IP20
Creepage distances and clearances	EN 60664-1
Ambient temperature / storage temperature	-25°C – +65°C / -25°C – +75°C
Standards	EN 61508, EN 61511, EN 62061, EN ISO 13849-1, EN 50156-1, EN 81-1
Approvals	TÜV, cULus

Note:

Safe relay contacts are expanded using the series SNE contact expansion relay (from Page 64). Types **SNE 4024K** and **SNE 4012K** in particular are ideal for contact expansion.

Gateway

With the **samos®** PRO gateways, system information can be transferred between the **samos®** PRO safe control and an industrial control, a visualization system or a PC.

Application examples:

- Direct HMI connection
- Remote diagnosis and programming
- Read and write 50 byte
- Input and output states
- Configuration data
- Process data from the PLC
- Fault data (e.g. fault data of the connected sensor technology)



SP-CANopen

Features

- Fieldbus protocol CANopen
- Bidirectional communication with PLC
- Transfer rate up to 1 MBit/s
- Transfer of at least 50 bytes of data
- Simple configuration with **samos®** PLAN



SP-PROFIBUS-DP

Features

- Fieldbus protocol PROFIBUS-DP
- Bidirectional communication with PLC
- Transfer rate 12 MBaud
- Transfer of at least 50 bytes of data
- Simple configuration with **samos®** PLAN



Overview of devices | part numbers

Type	Rated voltage	Remark	Part no.	Std. pack
SP-CANopen	24 V DC	CANopen	R1.190.0210.0	1
SP-PROFIBUS-DP	24 V DC	PROFIBUS-DP	R1.190.0190.0	1

Starter set & accessories



samos[®]PRO COMPACT starter set

- A safe way to get started
- Contains all required components
- With programming tool **samos[®]PLAN 5+**
- With USB-RS232 converter

You can get the free programming tool **samos[®]PLAN 5+** at www.wieland-electric.com Service / Software

samos[®]PRO




SP-COP-CARD1



SP-CABLE-USB1



SP-CABLE-ETH1



WKFN 2,5 E/35 GO-URL

samos[®]PRO accessories

- SP-COP-CARD1: Memory-card for SP-COP
- SP-CABLE-USB1: USB cable for SP-COP, 1.8 m
- SP-CABLE-ETH1: Ethernet cable for SP-COP, 2 m
- SP-COP-STARTER-SET:
Set including SP-COP2-EN-A, SP-COP-CARD1, SP-PLAN5+, SP-CABLE-USB1, SP-CABLE-ETH1
- SP-PLAN5+: CD with programming software **samos[®]PLAN 5+**
- WKFN 2,5 E/35 GO-URL **fasis**-multi-tier block with diodes
- SP-FILTER1 output filter, 24 V DC, 680 nF
- SP-FILTER2 output filter, 24 V DC, 2,2 μF

Overview of devices | part numbers

Type	Description	Part no.	Std. pack
SP-COP-CARD1	Memory-card for SP-COP	R1.190.1000.0	1
SP-CABLE-USB1	USB cable for SP-COP, 1.8 m	R1.190.1010.0	1
SP-CABLE-ETH1	Ethernet cable for SP-COP, 2 m	R1.190.1020.0	1
SP-COP-STARTER-SET	Content: SP-COP2-EN-A, SP-COP-CARD1, SP-PLAN5+, SP-CABLE-USB1, SP-CABLE-ETH1	R1.190.1100.0	1
SP-PLAN5+	CD with programming software samos[®]PLAN 5+	R1.190.1030.0	1
WKFN 2,5 E/35 GO-URL	fasis - Multi-tier block with diodes	56.703.8755.9	100
APFN 2,5 E/35	End plate	07.312.7355.0	10