

Pin busbar touch-safe, 10 mm² 3-phase, 214 mm long can be cut, with end caps



Figure similar

Model	
Product brand name	SENTRON
Product designation	Pin busbar
Design of the product	10 mm ² , 3PH L214 mm
General technical data	
Phase number	3
Cross-section	10 mm ²
Current	
Continuous current / rated value	63 A
Product details	
Product feature / insulated	Yes
Connections	
Type of electrical connection	Pin
Mechanical Design	
Width	18 mm

Length	214 mm
Net weight	87.63 g

Certificates

Declaration of Conformity

other

[Miscellaneous](#)



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3738>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3738>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3738

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

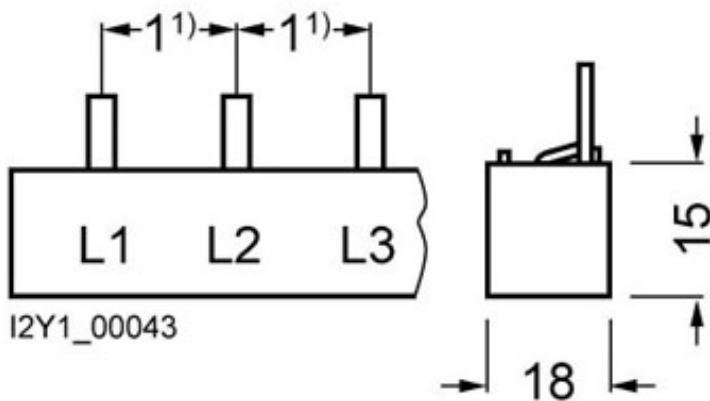

¹⁾ Pin spacings in MW (Modular widths, 1 MW = 18 mm).

