


**SAK Series
KDKS 1/35**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

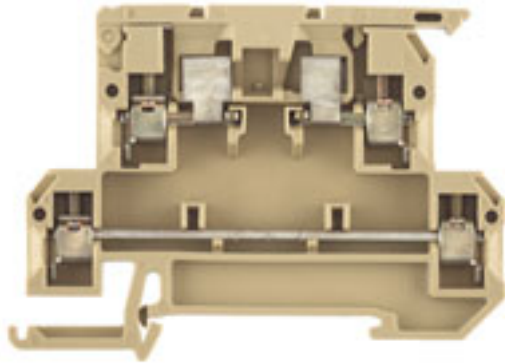

The fuse terminals of the Weidmüller SAK series are available in two different forms:

- Fuse terminal with pivoting retaining lever
- Fuse terminals with screw cap

General ordering data

Type	KDKS 1/35
Order No.	9503310000
GTIN (EAN)	4008190182304
Qty.	50 pc(s).

SAK Series
KDKS 1/35

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	8 mm	Height	73.5 mm
Height of lowest version	55.6 mm	Depth	55.6 mm
Net weight	20.073 g		

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C
----------------------------------	--------	----------------------------------	--------

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on	Version	Screw connection, Fuse isolator, One end without connector

CSA ratings data

Certificate No. (CSA)	12400-281	Voltage size C (CSA)	300 V
Current size C (CSA)	25 A	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	4 mm ²
---	---------------------	---	-------------------

Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	9 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	4	Clamping range, rated connection, min.	0.33 mm ²
Clamping range, rated connection, max.	4 mm ²	Clamping screw	M 3
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm
Torque level with DMS electric screwdriver	2	Gauge to IEC 60947-1	A3
Wire connection cross section, solid core, min. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	4 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm ²
Wire connection cross section AWG, max.	AWG 12		

Rated data

Rated cross-section	4 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	6.3 A
Current at maximum wires	6.3 A	Standards	IEC 60947-7-3
Pollution severity	3		

Creation date August 12, 2014 1:05:26 PM CEST

Data sheet

**SAK Series
KDKS 1/35**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	300 V
Current size C (UR)	10 A	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG

Material data

Insulating material	PA 66	Material	PA 66
Colour	Beige	UL 94 flammability rating	V-2

System specifications

Product family	SAK Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	2
Number of connections	4	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes	PE connection	No

Display element

Operating voltage for display, max.	500 V	Type of voltage for indicator	AC
-------------------------------------	-------	-------------------------------	----

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Display	Without LED
Fuse holder (cartridge holder)	Pivoting	Operating voltage, max.	500 V
Type of voltage for indicator	AC		

Classifications

ETIM 3.0	EC000899	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-16	eClass 6.2	27-14-11-16
eClass 7.1	27-14-11-16		

Product information

Descriptive text ordering data	Max. power loss (1.6 W) at the cartridge fuse limits the rated current.
Descriptive text technical data	Note: max. conductor connection = 2.5 mm ² when using the cross-connector.

Approvals

Approvals



ROHS	Conform
------	---------