

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-SUB miniature pin strip, for mounting on NS 35 rails, no. of pos.: 62, width: 180 mm


The illustration shows a 44-position version

Why buy this product

- ☒ Screw connection
- ☒ 1:1 connection



Key commercial data

Packing unit	1 pc
GTIN	 4 046356 451697
Weight per Piece (excluding packing)	309.1 g
Custom tariff number	85369010
Country of origin	United States
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width	113.5 mm
Height	69 mm
Depth	62 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. permissible operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Technical data

General

Number of positions	62
Status display	No
Mounting position	any
Standards/regulations	EN 50178

Connection data for connection 1

Connection name	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Number of positions	62
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Connection data for connection 2

Connection name	D-SUB connection
Number of connections	1
Connection method	High density D-SUB pin strip
Number of positions	62

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Classifications

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals


Approvals


cUL Recognized / UL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

cUL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

UL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

EAC

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Approvals

cULus Recognized  US

Accessories

Accessories

System cable

Cable - CABLE-D62SUBH/B/B/ 40/K4G/GK2 - 2319090



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 0.4 m

Cable - CABLE-D62SUBH/B/B/ 60/K4G/GK2 - 2319087



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 0.6 m

Cable - CABLE-D62SUBH/B/B/ 200/K4G/GK2 - 2312000



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 2 m

Cable - CABLE-D62SUBH/B/B/ 300/K4G/GK2 - 2311991



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 3 m

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Accessories

Cable - CABLE-D62SUBH/B/B/ 400/K4G/GK2 - 2311988



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 4 m

Cable - CABLE-D62SUBH/B/B/ 500/K4G/GK2 - 2311975



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 5 m

Cable - CABLE-D62SUBH/B/B/ 750/K4G/GK2 - 2311962



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 7.5 m

Cable - CABLE-D62SUBH/B/B/1000/K4G/GK2 - 2311959



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 10 m

Cable - CABLE-D62SUBH/B/B/1250/K4G/GK2 - 2311946



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 12.5 m

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Accessories

Cable - CABLE-D62SUBH/B/B/1500/K4G/GK2 - 2311933



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 15 m

Cable - CABLE-D62SUBH/B/B/1750/K4G/GK2 - 2311920



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 17.5 m

Cable - CABLE-D62SUBH/B/B/2000/K4G/GK2 - 2311917



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 20 m



Cable - CABLE-D62SUBH/B/B/3000/K4G/GK2 - 2901375



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 30 m

Drawings

Interface module - VIP-3/SC/HD62SUB/M - 2322391

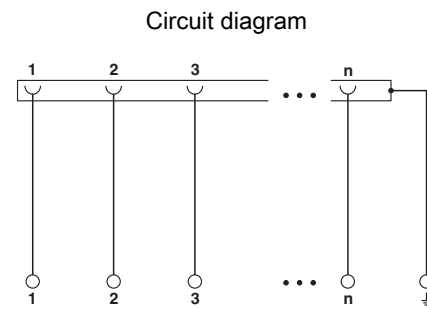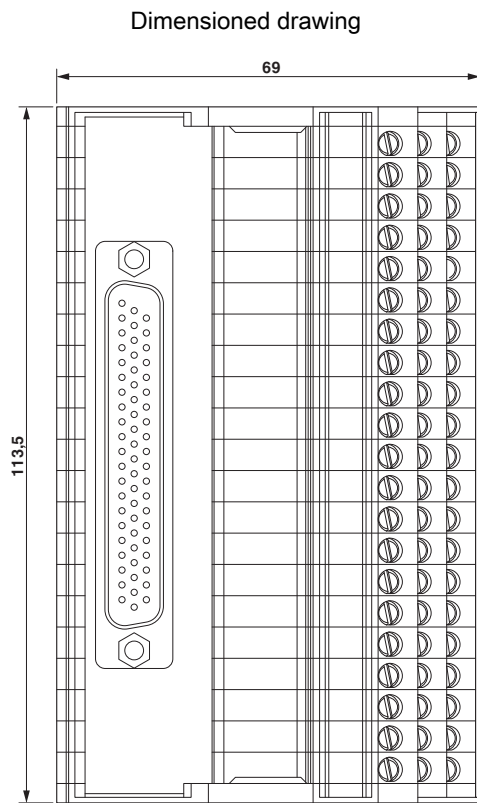

Universal circuit diagram