

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

VARIOFACE Front Connect, 1:1 D-SUB termination board with Push-in front connections and D-SUB pin strip, number of positions: 15, overall width: 19 mm



Your advantages

- Fast, clear, and error-free wiring, thanks to Push-in terminal blocks with front connection technology
- Up to 60 % less space required in the control cabinet compared to conventional solutions due to the innovative design with an installation width of 19 mm
- Plug and Play connection to the remote IO and field level with the comprehensive system cabling range from Phoenix Contact
- Optimum support for your distributed I/O devices, thanks to high flexibility and the slim design
- Optically and haptically compatible with modern remote IO systems

Commercial Data

Item number	1278800
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2224
Product Key	CK2224
GTIN	4063151475758
Weight per Piece (including packing)	94.233 g
Weight per Piece (excluding packing)	91 g
Customs tariff number	85366990
Country of origin	DE

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Technical Data

Product properties

Product type	Interface module
--------------	------------------

Insulation characteristics

Overvoltage category	II
Pollution degree	2
Insulation	Functional insulation

Electrical properties

Max. permissible operating voltage	30 V AC
	60 V DC
Max. permissible current	2 A (per branch)
Rated insulation voltage	63 V
Rated surge voltage	0.8 kV (1.2/50 µs)

Connection data

Controller level

Connection in acc. with standard	IEC 60807-2
	DIN 41652
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	15

Field level

Connection method	Push-in connection
Stripping length	10 mm
Number of positions	16
Conductor cross section solid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
	0.25 mm ² ... 1.5 mm ² (Ferrules without plastic sleeve)
	0.25 mm ² ... 1.5 mm ² (Ferrule with plastic sleeve)
Conductor cross section AWG	24 ... 16

Dimensions

Width	18.9 mm
Height	127 mm
Depth	40.25 mm

Material specifications

Flammability rating according to UL 94	V0
--	----

Environmental and real-life conditions

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Ambient conditions

Degree of protection	IP20
Degree of protection Installation location	IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C (≤2000 m) -40 °C ... 63 °C (2001 m - 3000 m)
Altitude	≤ 3000 m

Approval data

UL, USA / Canada

Identification	UL 61010-2-201
----------------	----------------

CSA, USA/Canada

Identification	CSA C22.2 NO. 61010-2-201
----------------	---------------------------

Standards and regulations

Air clearances and creepage distances

Standards/regulations	DIN EN 60664-1
-----------------------	----------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Interface module - VFC-PT/D15SUB/M


1278800

<https://www.phoenixcontact.com/gb/products/1278800>



Drawings

Circuit diagram

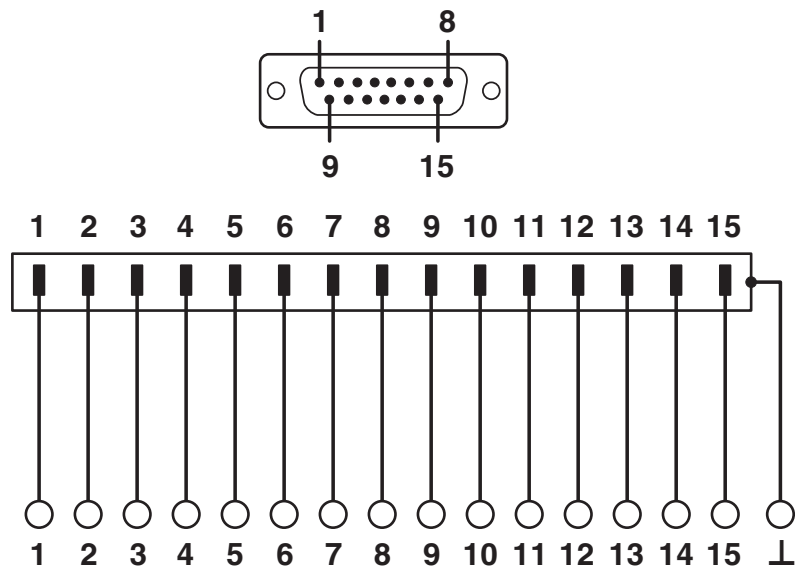

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Approvals



UL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705

cULus Listed

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Classifications

ECLASS

ECLASS-9.0	27141152
ECLASS-10.0.1	27141152
ECLASS-11.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Accessories

Cable

Cable - CABLE D-SUB-S/.../.../... - 2302340

<https://www.phoenixcontact.com/gb/products/2302340>



Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length

Cable

Cable - CABLE D-SUB-B-B-S/.../.../... - 2302421

<https://www.phoenixcontact.com/gb/products/2302421>



Shielded round cable, assembled with two D-SUB female connectors, variable cable length

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Marker strip

Marker strip - SK 2,8 WH:REEL - 0805205

<https://www.phoenixcontact.com/gb/products/0805205>



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, for terminal block width: 90000 mm, lettering field size: continuous x 2.8 mm, Number of individual labels: 480000

Cable

Cable - CABLE-D15SUB/B/S/ 50/KONFEK/S - 2302052

<https://www.phoenixcontact.com/gb/products/2302052>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 0.5 m

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/S/100/KONFEK/S - 2302065

<https://www.phoenixcontact.com/gb/products/2302065>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1 m

Cable

Cable - CABLE-D15SUB/B/S/150/KONFEK/S - 2302078

<https://www.phoenixcontact.com/gb/products/2302078>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1.5 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/S/200/KONFEK/S - 2302081

<https://www.phoenixcontact.com/gb/products/2302081>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 2 m

Cable

Cable - CABLE-D15SUB/B/S/300/KONFEK/S - 2302094

<https://www.phoenixcontact.com/gb/products/2302094>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 3 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/S/400/KONFEK/S - 2302104

<https://www.phoenixcontact.com/gb/products/2302104>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 4 m

Cable

Cable - CABLE-D15SUB/B/S/600/KONFEK/S - 2302117

<https://www.phoenixcontact.com/gb/products/2302117>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 6 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/S/HF/S/ 1,0M - 1066600

<https://www.phoenixcontact.com/gb/products/1066600>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1 m

Cable

Cable - CABLE-D15SUB/B/S/HF/S/ 2,0M - 1066602

<https://www.phoenixcontact.com/gb/products/1066602>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 2 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/S/HF/S/ 3,0M - 1066603

<https://www.phoenixcontact.com/gb/products/1066603>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 3 m

Cable

Cable - CABLE-D15SUB-B-S-HF-S/... - 1075565

<https://www.phoenixcontact.com/gb/products/1075565>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: variable

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/B/100/KONFEK/S - 2305444

<https://www.phoenixcontact.com/gb/products/2305444>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 1 m

Cable

Cable - CABLE-D15SUB/B/B/200/KONFEK/S - 2305457

<https://www.phoenixcontact.com/gb/products/2305457>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 2 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/B/300/KONFEK/S - 2305460

<https://www.phoenixcontact.com/gb/products/2305460>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 3 m

Cable

Cable - CABLE-D15SUB/B/B/HF/S/ 1,0M - 1066597

<https://www.phoenixcontact.com/gb/products/1066597>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 1 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB/B/B/HF/S/ 2,0M - 1066598

<https://www.phoenixcontact.com/gb/products/1066598>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 2 m

Cable

Cable - CABLE-D15SUB/B/B/HF/S/ 3,0M - 1066599

<https://www.phoenixcontact.com/gb/products/1066599>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: 3 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D15SUB-B-B-HF-S/... - 1075566

<https://www.phoenixcontact.com/gb/products/1075566>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB socket strip (1x 15-position); cable length: variable

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/0,5M - 2926085

<https://www.phoenixcontact.com/gb/products/2926085>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 0.5 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/1,0M - 2926098

<https://www.phoenixcontact.com/gb/products/2926098>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 1 m

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/1,5M - 2926108

<https://www.phoenixcontact.com/gb/products/2926108>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 1.5 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/2,0M - 2926111

<https://www.phoenixcontact.com/gb/products/2926111>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 2 m

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/3,0M - 2926124

<https://www.phoenixcontact.com/gb/products/2926124>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 3 m

Interface module - VFC-PT/D15SUB/M

1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/4,0M - 2926137

<https://www.phoenixcontact.com/gb/products/2926137>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 4 m

Cable

Cable - CABLE-D-15SUB/F/OE/0,25/S/6,0M - 2926140

<https://www.phoenixcontact.com/gb/products/2926140>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: 6 m

Interface module - VFC-PT/D15SUB/M



1278800

<https://www.phoenixcontact.com/gb/products/1278800>

Cable

Cable - CABLE-D-15SUB-F-OE-0,25-S/... - 2900905

<https://www.phoenixcontact.com/gb/products/2900905>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 15-position); cable length: variable

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk