

### DEUTSCH | Deutsch DT-XT

TE Internal #: 2-2600026-1 Deutsch DT-XT, Receptacle, Wire-to-Wire, 3 Position, .34in [8.66 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging)

#### View on TE.com >

Connectors > Automotive Connectors > Connector Housings



Connector & Housing Type: Receptacle Mating Pin Diameter: 1.56 mm [.061 in] Connector System: Wire-to-Wire Number of Positions: 3 Centerline (Pitch): 8.66 mm [.34 in]

### Features

**TE** 

### **Product Type Features**

Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Body Features	
Primary Product Color	Black
Contact Features	
Mating Pin Diameter	1.56 mm[.061 in]

### 934442101

Deutsch DT-XT, Receptacle, Wire-to-Wire, 3 Position, .34in [8.66mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging)



#### **Mechanical Attachment**

Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	8.66 mm[.34 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Packaging Features	
Packaging Quantity	800
Other	
Connector Position Assurance Capable	No
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### 934442101

Deutsch DT-XT, Receptacle, Wire-to-Wire, 3 Position, .34in [8.66mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging)




## **Compatible Parts**



# Also in the Series | Deutsch DT-XT



# Customers Also Bought

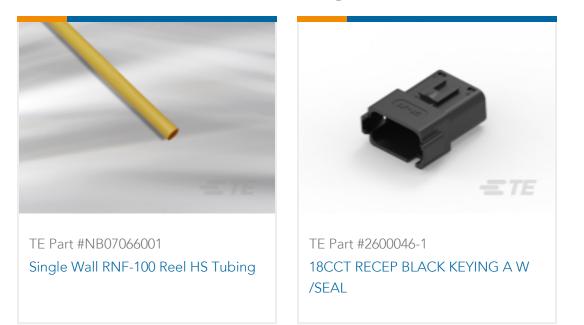

### Documents

Product Drawings 3CCT BLACK RECEP W/SMALL SEAL

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-2600026-1\_1.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_2-2600026-1\_1.3d\_igs.zip

English

### 934442101

Deutsch DT-XT, Receptacle, Wire-to-Wire, 3 Position, .34in [8.66mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging)



Customer View Model

ENG\_CVM\_CVM\_2-2600026-1\_1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals UL Report

English