

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



CHARX connect, Vehicle charging inlet, for charging electric vehicles (EV) with alternating current (AC), AC type 2, IEC 62196-2, 32 A / 480 V (AC), M6, X-Line, housing: black, A protective cap is supplied as standard for the AC contacts.

Product Description

Vehicle charging inlet for charging with alternating current (AC), compatible with type 2 AC vehicle charging connectors (EVSE), for installation in electric vehicles for e-mobility (EV).

Your advantages

- Complete product range
- Uniform, space-saving dimensions for the installation space and the screw connection points of all Phoenix Contact vehicle charging inlets
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Integrated interlock during charging
- Manual emergency release of the locking actuator
- Protected and sealed against dirt and water with a high degree of protection

Commercial Data

| | |
|--------------------------------------|---------------|
| Item number | 1271966 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales Key | XWCAIC |
| Product Key | XWCAIC |
| GTIN | 4063151463182 |
| Weight per Piece (including packing) | 1,798 g |
| Weight per Piece (excluding packing) | 1,798 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Technical Data

Notes

| | |
|---------|---|
| General | A protective cap is supplied as standard for the AC contacts. |
|---------|---|

Product properties

| | |
|-------------------|---|
| Product type | Vehicle charging inlet |
| Application | for charging electric vehicles (EV) with alternating current (AC) for installation in electric vehicles (EV) |
| Locking type | Locking in the inserted state with a locking mechanism |
| Charging standard | AC type 2 |
| Charging mode | Mode 2, 3 |

Electrical properties

| | |
|-------------------------------|---|
| Type of signal transmission | Pulse width modulation with modulated Powerline communication in accordance with ISO/IEC 15118 / DIN SPEC 70121 |
| Note on the connection method | Crimp connection, cannot be disconnected |
| Temperature measurement | DC contacts: 2x PT1000 (DIN EN 60751) |
| Temperature monitoring | AC contacts: PTC chain (DIN EN 60738-1) |
| Type of charging current | AC 3-phase |
| Charging power | 26 kW |
| Charging current | 32 A |

Power contact

| | |
|---------------|-----------------------|
| Number | 5 (L1, L2, L3, N, PE) |
| Rated voltage | 480 V AC |
| Rated current | 32 A AC |

Signal contact

| | |
|---------------|------------|
| Number | 2 (CP, PP) |
| Rated voltage | 30 V AC |
| Rated current | 2 A |

(PTC chain)

| | |
|------------------------------|-------------------------------------|
| Sensor type | PTC chain |
| Standards/regulations | DIN EN 60738-1 |
| Messbereich_Widerstand | 790 Ω ... 1420 Ω |
| Resistance | max. 1280 Ω ±5 K |
| Recommended measured current | ≤ 1 mA (U _{max} = 16 V DC) |
| TEST Umgebungstemperatur Neu | -40 °C ... 130 °C |
| Cable structure | 5 x 0,5 mm ² |
| External cable diameter | 1.6 mm -0.2 mm |
| Bending radius | min. 15 mm |
| Cable weight | 7 kg/km |

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

| | |
|--------------------|----------------------|
| Cable resistance | ≤ 37.1 Ω/km |
| Single wire, color | brown, gray |
| | brown, yellow, green |

(Pt 1000)

| | |
|-----------------------|--------------|
| Sensor type | Pt 1000 |
| Standards/regulations | DIN EN 60751 |

Dimensions

| | |
|---------------------|------------------------------|
| Dimensional drawing | |
| Bore dimensions | 73 mm x 73 mm, 73 mm x 73 mm |

Material specifications

| | |
|----------|---------|
| Material | Plastic |
| | Silver |

Cable / line

| | |
|-------------------------|-----------------------|
| Cable weight | approx. 532 kg/km |
| Conductor structure | 5 x 6 mm ² |
| External cable diameter | 15.9 mm ±0.3 mm |
| Outer sheath, material | Silicone |
| External sheath, color | orange |
| Conductor resistance | ≤ 3.2 Ω/km |

Temperature sensor technology cable

| | |
|---------------------------------|-------------------------|
| Cable weight | 7 kg/km |
| Conductor structure | 2 x 0.5 mm ² |
| External cable diameter | 1.6 mm -0.2 mm |
| Outer sheath, material | PVC |
| Conductor resistance | ≤ 37.1 Ω/km |
| Ambient temperature (operation) | -40 °C ... 130 °C |

Communication cable

| | |
|----------------------------|---|
| Cable weight | 7 kg/km |
| Conductor structure | 0.5 mm ² + 0.5 mm ² |
| External cable diameter | 1.6 mm -0.2 mm |
| Outer sheath, material | PVC |
| Conductor resistance | ≤ 37.1 Ω/km |
| Single wire, cross section | 6 mm ² |

Standards and regulations

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Standards

| | |
|-----------------------|-------------|
| Standards/regulations | IEC 62196-2 |
|-----------------------|-------------|

Mounting

| | |
|--|------|
| Fixing screws | M6 |
| Screws included in the scope of delivery | none |


Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2

1271966


<https://www.phoenixcontact.com/gb/products/1271966>

Drawings

Schematic diagram

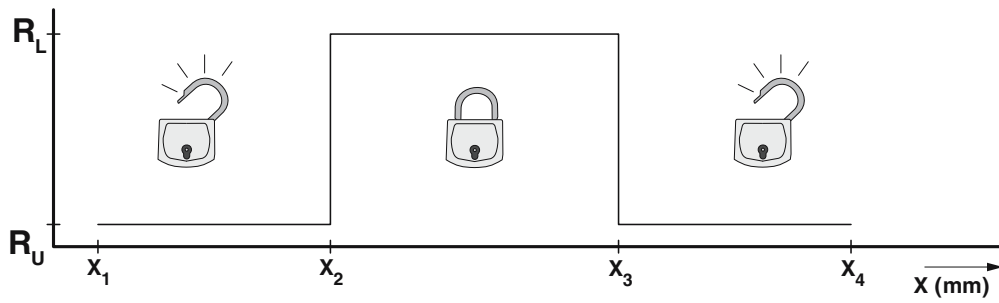

| | | |
|--|----------------------------|--------------------------------|
| | | |
| CHARX T2HCI12...: $R_U = 1 \text{ k}\Omega$ | $R_L = 11 \text{ k}\Omega$ | $R_U = 1 \text{ k}\Omega$ |
| CHARX T2HCI24...: $R_U = \infty \text{ k}\Omega$ | $R_L = 0 \text{ k}\Omega$ | $R_U = \infty \text{ k}\Omega$ |

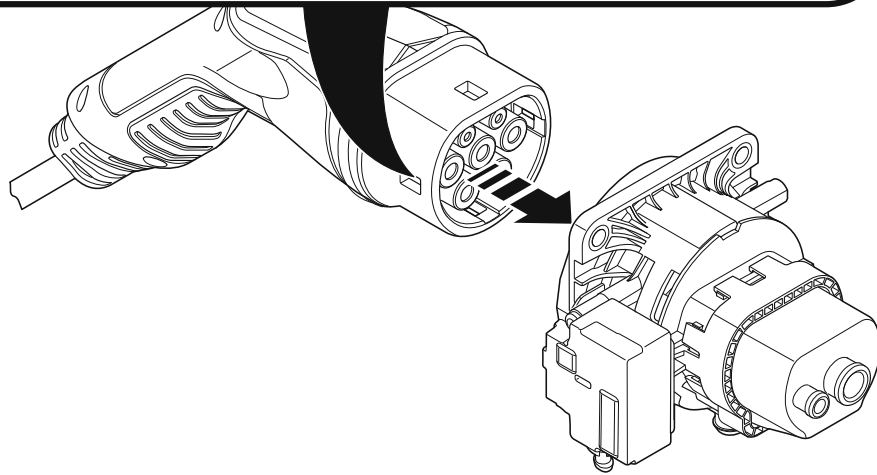


Detection for Vehicle Connector

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2

1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Functional drawing

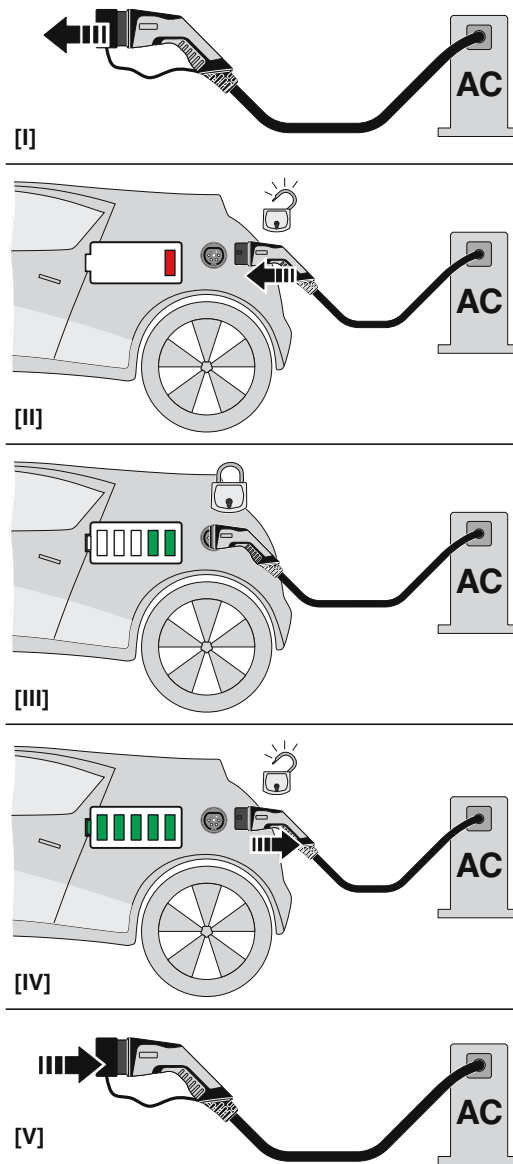


Operating instructions

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2

1271966

<https://www.phoenixcontact.com/gb/products/1271966>

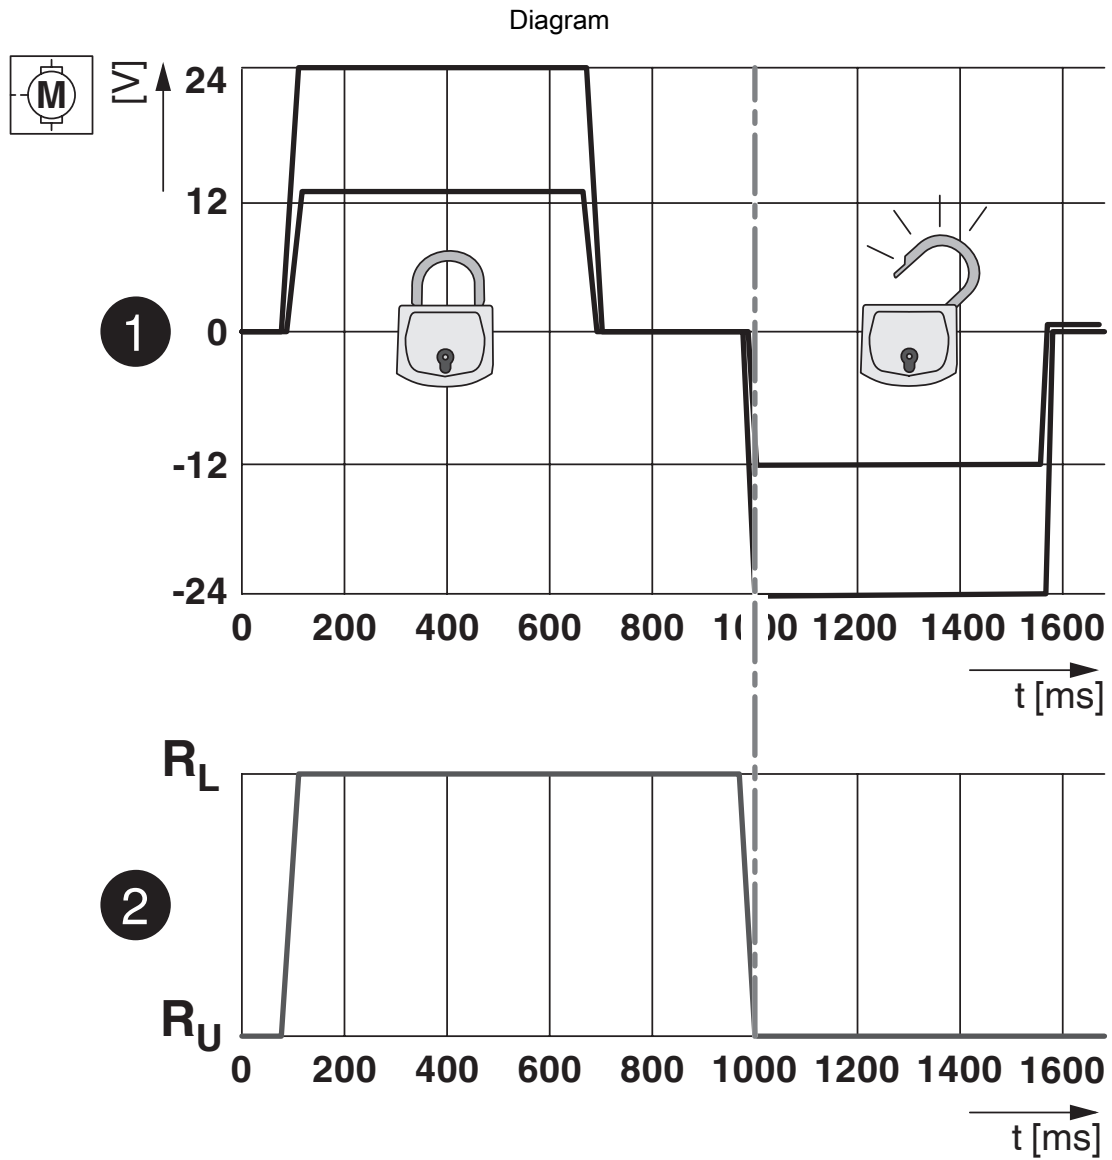


Locking states of the locking actuator

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2

1271966


<https://www.phoenixcontact.com/gb/products/1271966>

Connection diagram

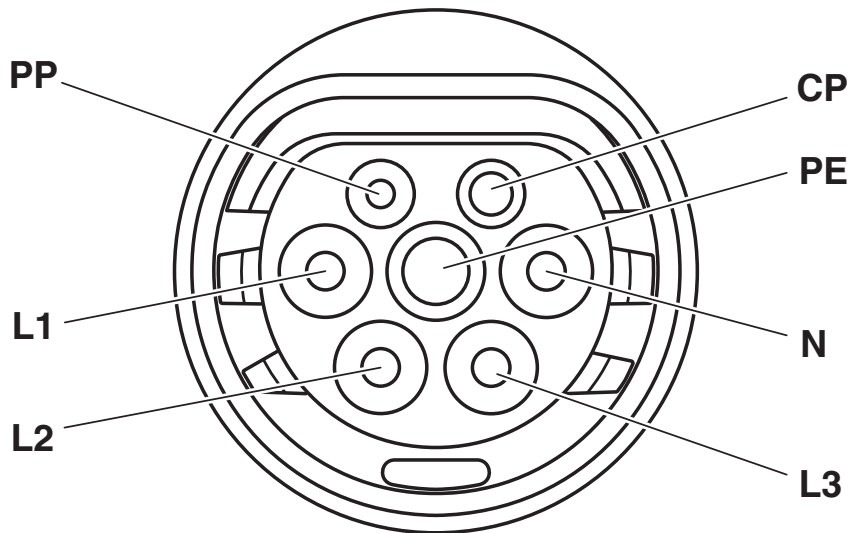

Pin assignment of vehicle charging inlets

Schematic diagram

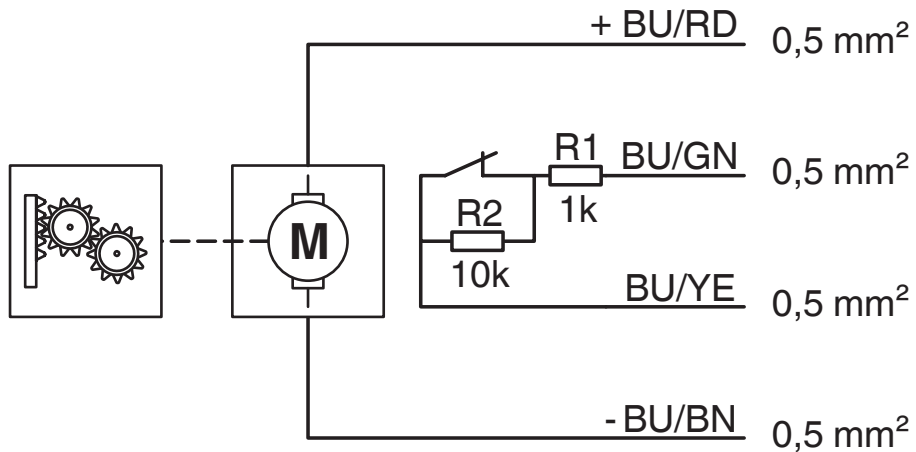


Block diagram of the locking actuator

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2

1271966


<https://www.phoenixcontact.com/gb/products/1271966>

Connection diagram

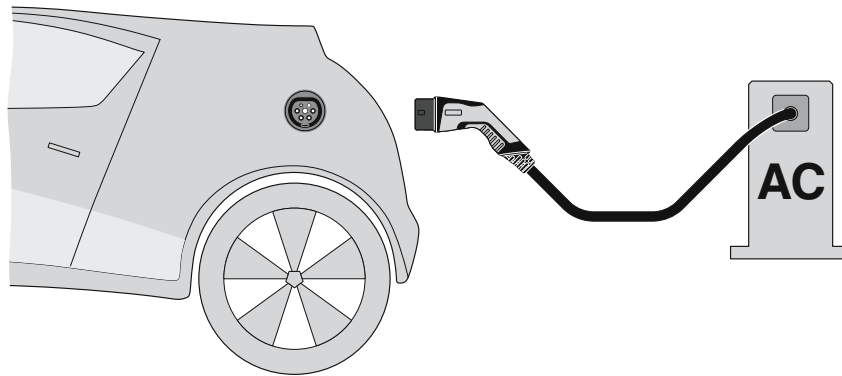

Terminology definition

Dimensional drawing

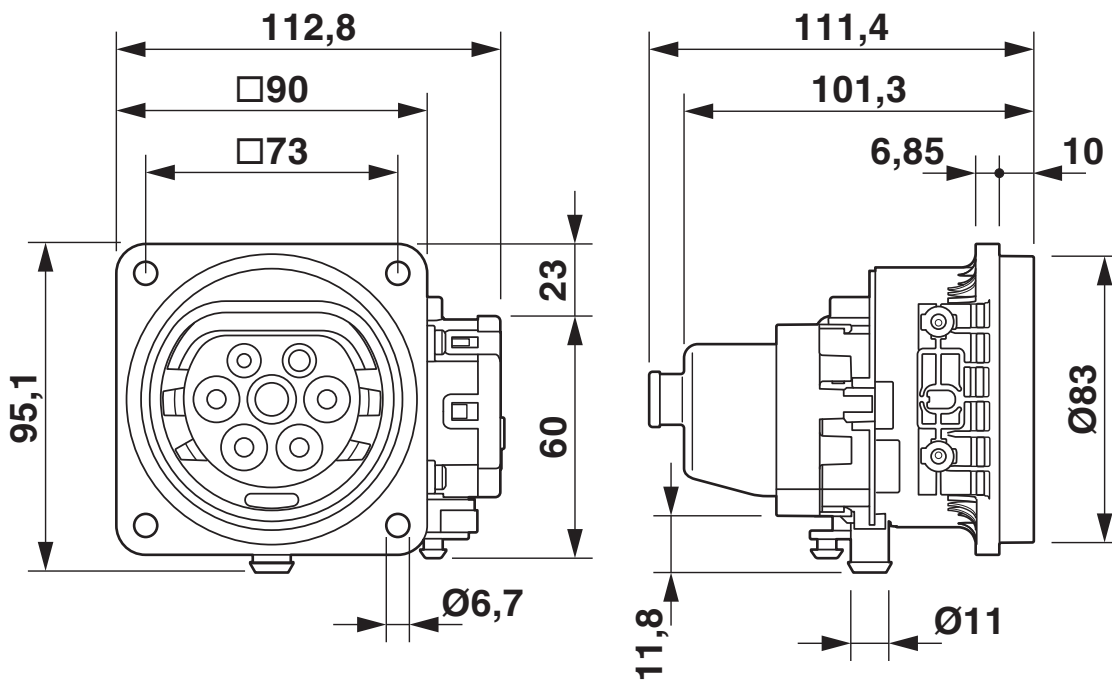

Dimensional drawing


Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966


<https://www.phoenixcontact.com/gb/products/1271966>

Connection diagram

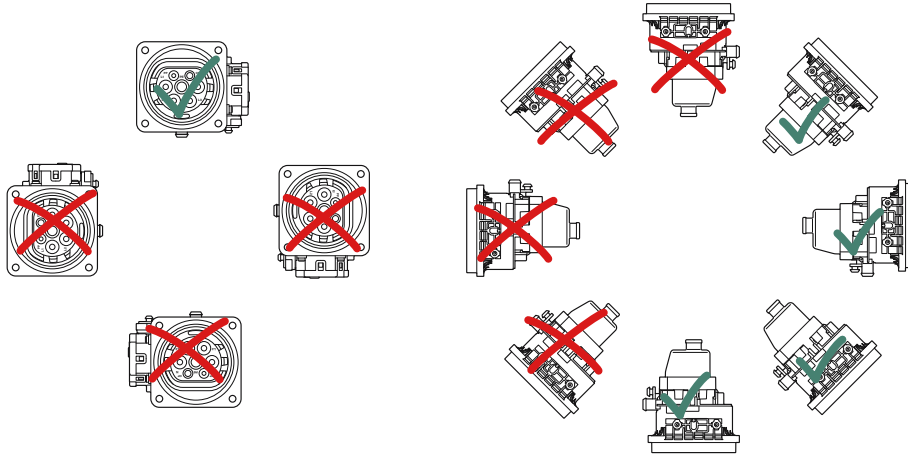

Installation positions

Schematic diagram

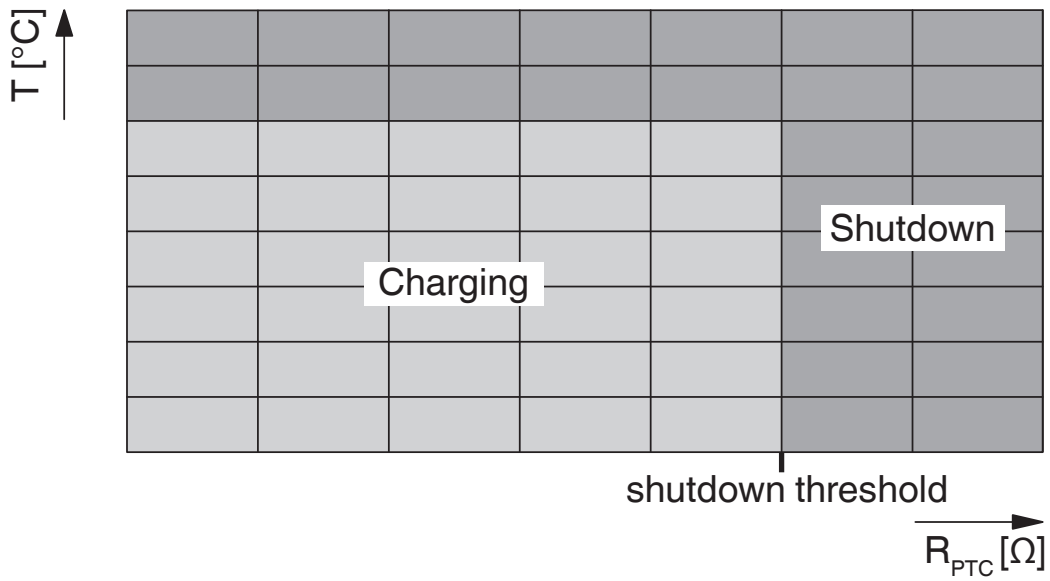

Temperature sensor technology resistance range at AC contacts

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-10.0.1 | 27144706 |
| ECLASS-11.0 | 27144706 |

Vehicle charging inlet - CHARX T2HCI12-3AC32-2,0M2



1271966

<https://www.phoenixcontact.com/gb/products/1271966>

Environmental Product Compliance

REACH SVHC

Lead 7439-92-1

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk