



# **Dimensions: [mm]**













Scale - 1,5:1

# **Recommended Land Pattern: [mm]**

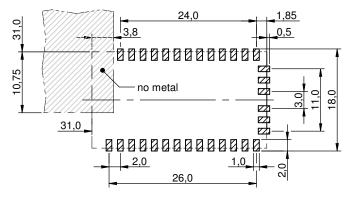

Scale - 1,5:1

## **Product Specific Pinning:**



Scale - 1.5:1

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	·	CREATED KaS	CHECKED GE		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com	<u> </u>	WIRL-PRO			ule 2.4 GHz	ORDER CODE <b>26030</b>	11021	000	
eiSos@we-online.com	WÜRTH ELEKTRONIK	1 1	NEVISION 001.023	status Valid		DATE (YYYY-MM-DD 2018-10-11		BUSINESS UNIT eiSmart	PAGE 1/6

# **General Properties:**

Properties		Test conditions	Value	Unit
Communication Protocol/ Standard	RF <sub>prot</sub>		proprietary (P2P, star)	
Microcontroller	μC		STM32	
Radio Chipset	RF-IC		EM9209	
Memory Size (Flash)			131072	В
Memory Size (RAM)			32768	В
Radio channel min.		0		
Radio channel max.		19		
Interface 1	101		UART	
Interface 1 Bitrate Range	IO <sub>1 Bitrate</sub>	latest FW revision	115.2	kbps
Number of I/O Ports	IO <sub>Ports</sub>	latest FW revision	19	

## **Electrical Properties:**

Properties		Test conditions	Value	Unit
Operating Supply Voltage Min.	V <sub>DD min.</sub>	TAMB = 25 °C, RH = 60 %	1.9	V
Operating Supply Voltage Max.	V <sub>DD max.</sub>	TAMB = 25 °C, RH = 60 %	3.6	V
Recommended Supply Voltage	V <sub>DD typ.</sub>	TAMB = 25 °C, RH = 60 %	3.3	V
Supply Current Sleep	I <sub>sleep</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	1	μA

## **Additional General Information:**

Ambient Temperature (refering to $I_R$ )	-40 up to +85 °C
Operating Temperature	-40 up to +85 °C
Storage Conditions (in original packaging)	< 40 °C; < 90 % RH

## **RF-Electrical Properties:**

Properties		Test conditions	Value	Unit
Frequency min.	f <sub>min.</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	2401.5	MHz
Frequency max.	f <sub>max.</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	2477.5	MHz
Line of Sight Range		Two-ray ground-reflection model	500	m
Line of Sight Conditions: Antenna Height			2	m
RF Bitrate max.	R <sub>b, max.</sub>	latest FW revision	72	kbps
Supply Current Transmitting	I <sub>TX</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	38	mA
Supply Current Receiving	I <sub>RX</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	10	mA
Output Power e.r.p.	P <sub>tx</sub>	VDD,typ,TAMB = 25 °C, RH = 60 %	7.5	dBm
RX sensitivity Condition Bitrate	Rx <sub>sens, kbps</sub>	latest FW revision	1.5	kbps
RX sensitivity e.r.p.	Rx <sub>sens</sub>		-113	dBm

## **Product Specific Pinning:**

Pin	Pad	Description	1/0
GND	1	Negative supply voltage	Supply
RESERVED	2	external Antenna connection - NOT USED	
GND	3	Negative supply voltage	Supply
RESERVED	4	see manual for more details	
RESERVED	5	see manual for more details	
RESERVED	6	see manual for more details	
VCC	7	Positive supply voltage	Supply
/RESET	8	Reset-Input	Input
RESERVED	9	see manual for more details	
WAKE_UP	10	see manual for more details	Input
RESERVED	11	see manual for more details	
RESERVED	12	see manual for more details	
RESERVED	13	see manual for more details	
RESERVED	14	see manual for more details	

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

Max-Eyth-Str. 1 74638 Waldenburg Tel. +49 (0) 79 42 945 - 0

www.we-online.com eiSos@we-online.com

**WÜRTH ELEKTRONİK** 

CREATED

KaS

CHECKED GENERAL TOLERANCE GE DIN ISO 2768-1m



WIRL-PRO2 Radio module 2.4 GHz with chip antenna

2603011021000

REVISION 001.023 STATUS Valid DATE (YYYY-MM-DD) 2018-10-11

BUSINESS UNIT PAGE 2/6 eiSmart

DECEDICED	145	16 113	
RESERVED	15	see manual for more details	
RESERVED	16	see manual for more details	
TX_IND	17	radio activity indicator for reception	Output
RX_IND	18	radio activity indicator for transmission	Output
RESERVED	19	see manual for more details	
RESERVED	20	see manual for more details	Input
RESERVED	21	see manual for more details	
UTXD	22	UART transmit	Output
URXD	23	UART receive	Input
RESERVED	24	see manual for more details	
RESERVED	25	see manual for more details	
RESERVED	26	see manual for more details	
RESERVED	27	see manual for more details	
RESERVED	28	see manual for more details	
RESERVED	29	see manual for more details	
RESERVED	30	see manual for more details	
RESERVED	31	see manual for more details	
RESERVED	32	see manual for more details	
GND	33	Negative supply voltage	Supply

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0

www.we-online.com eiSos@we-online.com



CREATED CHECKED GENERAL TOLERANCE DIN ISO 2768-1m

DESCRIPTION

WIRI -PRO2 Radio module 2 4 GHz

WIRL-PRO2 Radio module 2.4 GHz with chip antenna

ORDER CODE **2603011021000** 

PAGE


3/6


 2603011021000

 BEVISION
 STATIUS
 DATE (WYY-MM-DD)
 BUSINESS UNIT

 001.023
 Valid
 2018-10-11
 eiSmart


## Packaging Specification - Tape and Reel: [mm]

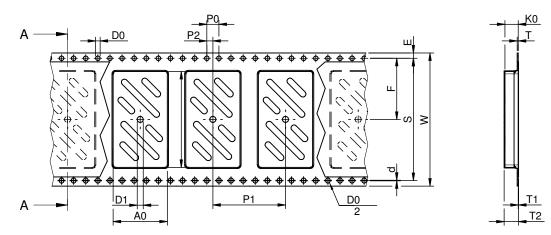


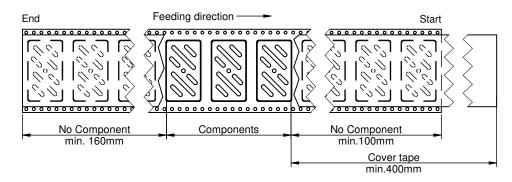


Packaging is refered to the international standard IEC 60286-3:2013


	Таре Туре	A0 (mm)	B0 (mm)	W (mm)	T (mm)	T1 (mm)	T2 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	DO (mm)	D0 / 2 (mm)	D1 (mm)	d (mm)	E (mm)	S (mm)	F (mm)	Material	Qty. (pcs.)
I		typ.	typ.	±0,3	ref.	max.	typ.	typ.	$\pm 0,1$	$\pm 0,1$	±0,15	+0,1/-0,0	+0,05/ -0,0	min.	±0,05	$\pm 0,1$	$\pm 0,1$	±0,1		
I	3	17,90	31,70	44,00	0,35	0,10	4,65	4,40	4,00	24,00	2,00	1,50	0,75	2,00	0,20	1,75	40,40	20,20	Polystyrene	400

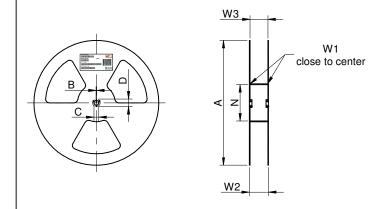

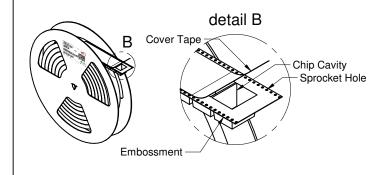

A (mm)	B (mm)	C (mm)	D (mm)	N (mm)	W1 (mm)	W2 (mm)	W3 (mm)	W3 (mm)	Material
± 2,0	min.	min.	min.	min.	+ 2,0	max.	min.	max.	
330,00	1,50	12,80	20,20	80,00	44,40	50,40	43,90	47,40	Polysytrene/ Polyurethane



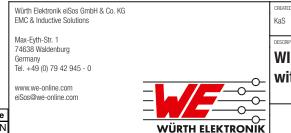

GE DIN ISO 2768-1m WIRL-PRO2 Radio module 2.4 GHz with chip antenna ORDER CODE 2603011021000 DATE (YYYY-MM-DD) REVISION STATUS BUSINESS UNIT PAGE 001.023 4/6 Valid 2018-10-11 eiSmart

GENERAL TOLERANCE

CHECKED

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of wireless connectivity of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This electronic component is designed and developed with the intention for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component was designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the component may be damaged or dissolved.
- Do not drop or impact the components, as the body, pins or termination may flake apart.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not guarantee any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The customer is responsible for the functionality of their own products. All technical specifications for standard products also apply to customer specific products.

### **Product specific:**

#### Soldering:

- The solder profile must comply with the Würth Elektronik technical soldering specification. All other profiles will void the warranty.
- All other soldering methods are at the customer's own risk.

#### **Cleaning and Washing:**

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the component. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process could break the module. Therefore, we do not recommend using a brush during the PCB cleaning process.

### **Potting and Coating:**

If the product is potted in the costumer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the component. Expansion could damage the body, pins or termination of
the product. We recommend a manual inspection after potting to avoid these effects.

· Conformal coating may affect the product performance.

## **Storage Conditions:**


- A storage of Würth Electronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer
  degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of
  shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- If there is a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is also recommended to return the component to the original moisture proof bag and reseal the moisture proof bag again.
- ESD prevention methods need to be followed for manual handling and processing by machinery.

### **Handling:**

- Violation of the technical product specifications such as exceeding the nominal rated current, will void the warranty.
- Violation of the technical product specifications such as but not limited to exceeding the absolute maximum ratings will void the
  conformance to regulatory requirements.
- The Edge castellation is designed and made for prototyping, i.e. hand soldering purposes only.
- Non-antenna modules must be equipped with a proper antenna having specific characteristics.
- The applicable country regulations and specific environmental regulations must be observed.
- · Do not disassemble the product. Evidence of tampering will void the warranty.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

All topics are described in a more detailed manner in the manual for each product.

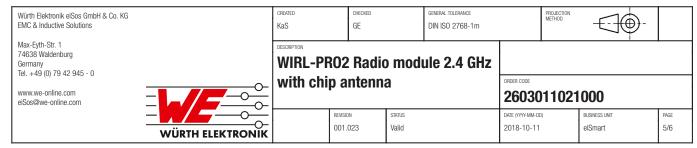

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

## 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

## 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

