


北京三鼎中天科技有限公司风机测试报告

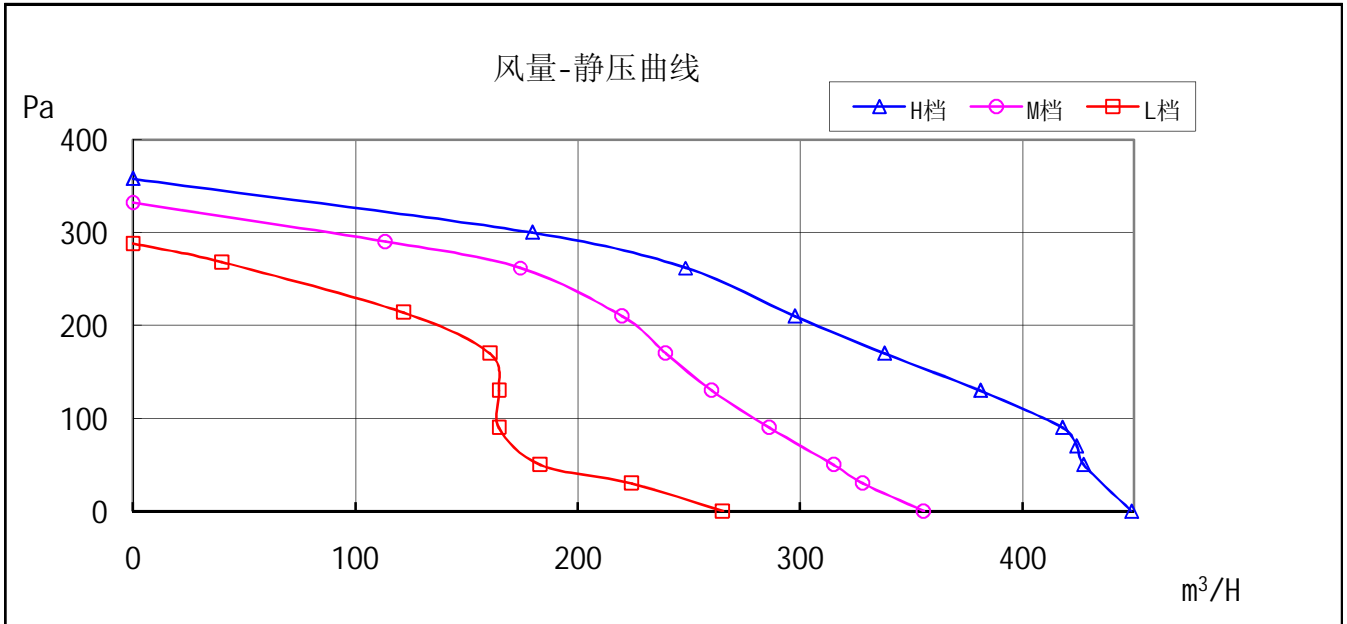

型号: F13392E-23L-B2T 220V 50Hz 2.5 μ F/450V 温度: 18℃ 大气压: 1040Hpa

	电压	电流	输入功率	转速	出口静压	标准风量	备注
	V	A	W	r/min	Pa	m³/H	
H档	220	0.581	127.1	1142	0	449	
	220	0.554	121.6	1465	50	427.5	
	220	0.549	120.6	1505	70	424.4	
	220	0.535	118	1631	90	418	
	220	0.501	110.4	1874	130	381	
	220	0.47	103.7	2057	170	338	
	220	0.435	96.1	2214	210	297.8	
	220	0.391	86	2383	262	248.6	
	220	0.321	70	2585	300	179.6	
	220	0.266	57.2	2715	358	0	
M档	220	0.491	108.5	898	0	355.6	
	220	0.481	106.2	1083	30	328.3	
	220	0.474	104.6	1222	50	315.2	
	220	0.454	100.1	1538	90	286.3	
	220	0.431	94.7	1773	130	260.3	
	220	0.406	89	1960	170	239.6	
	220	0.38	82.9	2133	210	220	
	220	0.319	68.1	2415	262	174.1	
	220	0.29	61.1	2527	290	113.6	
	220	0.256	53.3	2626	332	0	
L档	220	0.414	91.1	695	0	265.2	
	220	0.396	87	961	30	224.3	
	220	0.391	85.9	1145	50	183.2	
	220	0.379	83	1432	90	164.6	
	220	0.362	78.9	1683	130	164.6	
	220	0.332	72	1980	170	160.6	
	220	0.303	64.3	2196	214	121.8	
	220	0.269	56.4	2380	268	40.1	
	220	0.26	54.1	2435	288	0	