

Sensor/actuator cable - SAC-3P-MR/ 2,0-547 SCO BK - 1424923


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 3-position, PVC, Plug angled M12 SPEEDCON, A-coded, on free cable end, cable length: 2 m



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 055626 401959 |
| GTIN | 4055626401959 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |

General

| | |
|------------------------------|-------------------------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V |
| Number of positions | 3 |
| Coding | A - standard |
| Standards/regulations | M12 connector IEC 61076-2-101 |
| Status display | No |
| Protective circuit/component | Unwired |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Torque | 0.4 Nm (M12 connector) |

Sensor/actuator cable - SAC-3P-MR/ 2,0-547 SCO BK - 1424923

Technical data

Material

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Standards and Regulations

| | |
|--|-----------------|
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |
| Flammability rating according to UL 94 | HB |


Cable

| | |
|--|---|
| Cable type | PVC yellow 105 °C |
| Cable type (abbreviation) | 547 |
| UL AWM style | 2517 (105 °C / 300 V) |
| AWG signal line | 18 |
| Conductor structure signal line | 41x 0.16 mm |
| Core diameter including insulation | 1.7 mm ±0.03 mm |
| Wire colors | brown, blue, black |
| Overall twist | 3 wires, twisted |
| External sheath, color | yellow |
| External cable diameter D | 5.7 mm ±0.2 mm |
| Minimum bending radius, fixed installation | 8 x D |
| Outer sheath, material | PVC |
| Material conductor insulation | PVC |
| Conductor material | Tin-plated Cu litz wires |
| Nominal voltage, cable | 300 V |
| Special properties | C(UL) CMX OUTDOOR-CMG 105 °C |
| | UL ITC/PLTC 105 °C |
| | CSA AWM I/II A/B FT4 105 °C / 300 V |
| Flame resistance | FT4 |
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |

Drawings


Sensor/actuator cable - SAC-3P-MR/ 2,0-547 SCO BK - 1424923

Schematic diagram




Pin assignment M12 plug, 3-pos., A-coded, view male side

Cable cross section




PVC yellow 105 °C [547]

Dimensional drawing



M12 x 1 male plug, angled

Circuit diagram

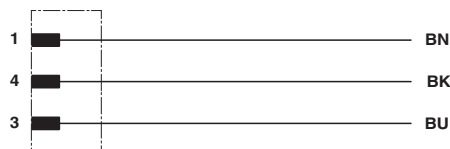

Contact assignment of the M12 plug

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed


Ex Approvals

Approval details

| | | | |
|--------------------------------|-------|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| Nominal current I _N | 4 A | | |
| Nominal voltage U _N | 300 V | | |

Sensor/actuator cable - SAC-3P-MR/ 2,0-547 SCO BK - 1424923

Approvals

| | | | |
|--------------------------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| Nominal current I _N | | 4 A | |
| Nominal voltage U _N | | 300 V | |

| | |
|--------------|---|
| cULus Listed |  |
|--------------|---|

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>