



FGG.1B.304.CLAD62Z

MECHANICAL DETAILS

Shell Style Model FG* : Straight plug cable collet and nut for fitting a bend relief


Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces

Cable Fixing 5.3 - 6.2 mm

Variant 2 Z : Nut for fitting a bend relief

	A	L	M	S1	S2
Mm.	12	42	31	10	9
In.	0,47	1,65	1,22	0,39	0,35



PERFORMANCE DETAIL

Insert 1B.304 : 4 Low Voltage

Insulator L: PEEK

Specifications

Contact Type: Solder

Max. Matings: 5000


Contact Dia.: 0.9 mm (0.035in)

Bucket Dia.: 0.8 mm (0.031in)

Max. Solid 0.34 mm² (AWG 22)

Max. Stranded 0.34 mm² (AWG 22)

R (max): 4.8 mOhm

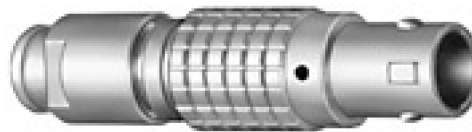

OTHER CHARACTERISTICS

Shell Style/Model Libellé

Temp (min) -55°C

Temp (max) +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms]

Salt Spray >144 hr

Climatical 50/175/21

Shielding (min): 75 dB (10 MHz)

Shielding (min): 40 dB (1 GHz)

IP Rating 50



Available Download

unipole_multipole.pdf

Related links

- [Contact](#)
- [Quote Request](#)
- [Catalogs Downloads](#)
- [Catalogs Requests](#)
- [Sample Request](#)
- [3D drawings](#)